

73 Amateur Radio Today

MARCH 1995
ISSUE # 414
USA \$2.95
CANADA \$3.95
A WGI Publication
International Edition

**Build Your Own WX
Satellite Receiver**
Easy HF Satellite Antenna
RF Grounding in the Shack

More 73 Reviews
S&S Programmable Counter
LOGic 4 Software
Ham University
Azden PCS-7200



*****5-DIGIT 48103
#00000191940#R JUN76
SERIALS PROCESSING DEPT
UNIV MICROFILMS INT
300 N ZEEB RD
ANN ARBOR MI 48103-1553

0 74820 08725

40-220 MHz Mobile!

ICOM'S NEW IC-2000H LEADS THE WAY TO CLEAR, CRISP RECEPTION! —

Mobile radios (of all manufacturers) have recently experienced increasing problems from cross modulation interference. This has been caused by the increasing quantity of RF devices (i.e.: mobile radios, paging systems, cell phones, cordless phones, etc....) Commonly known as "intermod", this interference can make a mobile radio unuseable at certain frequencies, depending on local area conditions.

SUPERIOR WIDEBAND RECEIVER CHARACTERISTICS — ICOM's IC-2000H has been specifically designed to deal with this growing problem. A tracking tuning system and high quality RF band pass filters are employed to improve image rejection and intermodulation characteristics. Now you can pursue your hobby in areas previously not possible due to interference. Plus, you're less likely than ever to miss an important call!

ALPHANUMERIC DISPLAY — With the IC-2000H you can program a

50 WATT OUTPUT — Work distant repeaters with the IC-2000H. The full 50 watts of output power gives you enough muscle to work most applications. And when you don't need as much power, such as when working a close station, you may choose a 5 or 10 watt output power setting.

"ONE-PIECE" CONSTRUCTION — ICOM gave the IC-2000H a rugged "one-piece" die cast aluminum frame and our largest heat sink ever. Now you'll get dependable, stable transmissions

in extreme environments. Plus, any heavy duty cycle operation is no problem.

PRICE PERFORMANCE — Even with it's high

NEW! IC-2000H

• FEATURES •

- 50 W of power (50, 10, 5 selectable)
- Rx 118-174 MHz (118-136 AM, 136.1-174 FM)
- Tx 140-150 MHz (for MARS/CAP)
- AM aircraft receive

superior
WIDE BAND
reception

- Alphanumeric display
- Message paging
- 50 memory channels
- 2 scratch pad memories
- 6 scan edge memories
- Full scan + program scan
- 5 scan resume conditions
- Call channel
- Busy channel lockout
- Auto power off
- Scan modes and priority watch
- Programmable up switch
- DTMF mic included
- "One touch" button operation
- Separate volume and squelch knobs
- Alpha message paging (UT-55 required)
- Tone scan (UT-85 required)
- Code squelch/pager (UT-101 required)
- Tone squelch/pocket beep (UT-85 required)

INTERMOD



6 character name for each memory channel. With the name displayed instead of the frequency you'll have instant ID of memory channels, less confusion and mistakes, and a logical and convenient memory management system.

quality construction, great features and exceptional performance, the IC-2000H is one of the most economical 2 meter FM mobiles around. You'll get real value for your money.

FOR MORE INFO CALL ICOM'S FREE BROCHURE HOTLINE: (206) 450-6088

ICOM America, Inc. 2380 116th Avenue N.E., Bellevue, WA 98004 U.S.A. Customer service/technical support 206-454-7619

©1994 ICOM America, Inc. The ICOM logo is a registered trademark of ICOM, Inc. All stated specifications are subject to change without notice or obligation. ICOM radios significantly exceed FCC Regulations limiting spurious emissions. This device has not yet been approved by the Federal Communications Commission. This device is not, and may not be, offered for sale or lease, or sold or leased until the approval of the FCC has been obtained. 2000H1294Y

CIRCLE 179 ON READER SERVICE CARD

ICOM®



JST-245

160-10 Meters PLUS 6 Meter Transceiver



Fifteen reasons why your next HF transceiver should be a JST-245...

- 1** All-Mode Operation (SSB,CW,AM,AFSK,FM) on all HF amateur bands and 6 meters. JST-145, same as JST-245 but without 6 meters and built-in antenna tuner.
- ★ JST-145 COMING SOON ★**
- 2** MOSFET POWER AMPLIFIER • Final PA utilizes RF MOSFETs to achieve low distortion and high durability. Rated output is 10 to 150 watts on all bands including 6 meters.
- 3** AUTOMATIC ANTENNA TUNER • Auto tuner included as standard equipment. Tuner settings are automatically stored in memory for fast QSY.
- 4** MULTIPLE ANTENNA SELECTION • Three antenna connections are user selectable from front panel. Antenna selection can be stored in memory.
- 5** GENERAL COVERAGE RECEIVER • 100 kHz-30 MHz, plus 48-54 MHz receiver. Electronically tuned front-end filtering, quad-FET mixer and quadruple conversion system (triple conversion for FM) results in excellent dynamic range (>100dB) and 3rd order ICP of +20dBm.
- 6** IF BANDWIDTH FLEXIBILITY • Standard 2.4 kHz filter can be narrowed continuously to 800 Hz with variable Bandwidth Control (BWC). Narrow SSB and CW filters for 2nd and 3rd IF optional.
- 7** QRM SUPPRESSION • Other interference rejection features include Passband Shift (PBS), dual noise blanker, 3-step RF attenuation, IF notch filter, selectable AGC and all-mode squelch.
- 8** NOTCH TRACKING • Once tuned, the IF notch filter will track the offending heterodyne (± 10 KHz) if the VFO frequency is changed.
- 9** DDS PHASE LOCK LOOP SYSTEM • A single-crystal Direct Digital Synthesis system is utilized for very low phase noise.
- 10** CW FEATURES • Full break-in operation, variable CW pitch, built in electronic keyer up to 60 wpm.
- 11** DUAL VFOs • Two separate VFOs for split-frequency operation. Memory registers store most recent VFO frequency, mode, bandwidth and other important parameters for each band.
- 12** 200 MEMORIES • Memory capacity of 200 channels, each of which store frequency, mode, AGC and bandwidth.
- 13** COMPUTER INTERFACE • Built-in RS-232C interface for advanced computer applications.
- 14** ERGONOMIC LAYOUT • Front panel features easy to read color LCD display and thoughtful placement of controls for ease of operation.
- 15** HEAVY-DUTY POWER SUPPLY • Built-in switching power supply with "silent" cooling system designed for continuous transmission at maximum output.




Japan Radio Co., Ltd.

430 Park Ave., 2nd Floor New York, NY 10022 Phone: (212) 355-1180 Fax: (212) 319-5227

CIRCLE 159 ON READER SERVICE CARD

500 MHz SPECTRUM ANALYZER \$895

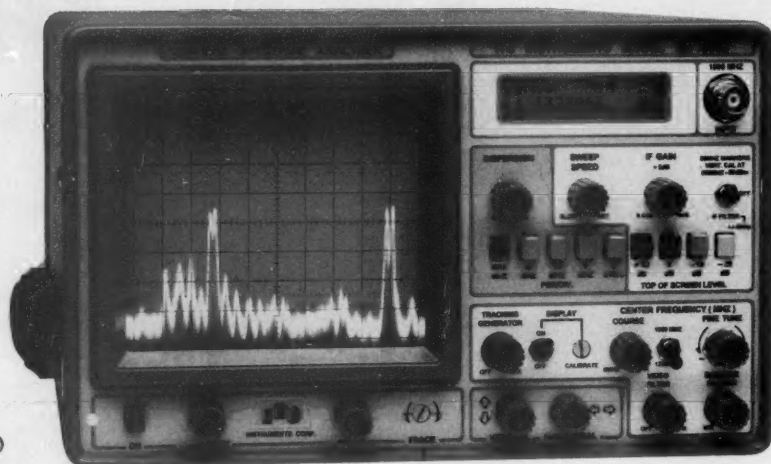

6" x 12" x 16" (H x W x D)
(only 16 LB)

SA1800C SHOWN
\$2295.00


1-1300 MHz *In One Sweep* \$1895 MADE IN THE USA

ALL NEW SPECTRUM DISPLAY MONITOR PLUS FULL FUNCTION SPECTRUM ANALYZER

LET THE SA500A SPOT THOSE HIDDEN SIGNALS
The SA500A easily attaches to any receiver IF output jack. Providing a panoramic signal display of your 1-30 MHz and 30 to 2000 MHz scanner or communication receiver. The SA500A is a Professional Spectrum Surveillance Technology Monitor. A Full Function Spectrum Analyzer with +/- 5KHz Narrow Band Filter, Center Freq. Display, 50 MHz Marker Generator. Capable of Tuning Duplexes, Amps, Filters Receivers, Transmitters & Perform EMI, RFI, FCC, Testing. SA500A First affordable Professional Spectrum Monitor/Analyzer for all serious Ham Radio and Radio Monitoring Operators. just \$895.00

.2-1.3GHz SA1300B THE ULTIMATE LOW COST ANALYZER
Quality & Performance that's what ITC Spectrum Analyzers are known for. 80 dB on Screen, -110 dBm Sensitivity, Center Frequency Display, +/- 5KHz Narrow Band Filter (for 5KHz resolution band width) 50 MHz Marker. DISPERSION ZOOM, Baseline Clipper, Sweep Speed, Adjustable Video Filter, 40dB of Input Attenuation. Standard on all ADVANTAGE Spectrum Analyzer specials. The SA1300B and SA1800C provide Laboratory Performance at a fraction of the normal cost. The SA1300B \$1895.00 -SA1800C 2-1.3GHz & .8-1.8GHz \$2295.00. Add a 1.3GHz Tracking Generator to any unit

1.3GHz FREQUENCY COUNTER .001 ppm

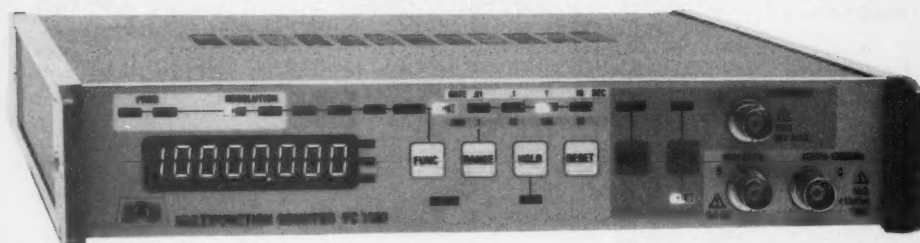

\$479.00

ISO9002 CERTIFIED
FIVE YEAR
WARRANTEE
REG. PRICE \$599.00
SAVE \$120.00

Laboratory Performance PROCESSOR STABILIZED OVEN OSCILLATOR .001 ppm

ITC FC1300: the first truly Accurate low cost Frequency Counter. Accuracy is the #1 Frequency Counter Requirement. The \$200 - \$800 counters being advertised the past few years are but toys when it comes to accuracy. These guess-so-matic units are off 5 to 10 PPM over temperature & time (That's +/- 6,000 -13,000 Hz at 1.3 GHz) The FC1300 is accurate to within +/-13 Hz at 1.3 GHz 0-40 degrees C. Sensitivity is <5mV 1Hz to 13 GHz, 50 Ohm & 1 Meg Ohm inputs, LP filter, 1x -10x input Att. Frequency Measurement, Period Averaging, Time Interval, External Counter, Freq. Ratio, Hold & Reset Functions, 4 Gate times .01 to 10 Sec. Tired of guess-so-matic Counters: Serious About Accuracy: Ready to step up to Laboratory Performance Accuracy: Call Today & Order

ADVANTAGE INSTRUMENTS CORP. MASTER CARD -VISA - DISCOVER - AMX

3817 S. CARSON ST. #818 CARSON CITY NV. 89701 Terms: COD - Check - Money Order

702-885-0234 FAX 702-885-7600 Call Toll Free 800-566-1818 - BBS 310-549-0321

PRICES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE OR OBLIGATION. F.O.B. CARSON CITY NV. NV. RESIDENTS ADD SALES TAX.

Call 800-566-1818
To Order or Info.
Free 1995 Catalog
ADVANTAGE
Carries a full line of
Scopes - Analyzers
Frequency Counters
Generators
LCR Bridges & DMM'S

THE TEAM

PUBLISHER/EDITOR
Wayne Green W2NSD/1

MANAGING EDITOR
Hope Currier

SENIOR/TECHNICAL EDITOR
Charles Warrington WA1RZW

EDITORIAL ASSOCIATE
Joyce Sawtelle

CONTRIBUTING EDITORS
Bill Brown WB8ELK
Mike Bryce WB8VGE
Joseph E. Carr K4IPV
Michael Geier KB1UM
Jim Gray W1XU/7
Chuck Houghton WB6IGP
Dr. Marc Leavey WA3AJR
Andy MacAllister WA5ZIB
Joe Moell KØOV
Carole Perry WB2MGP
Jeffrey Sloman N1EWO

ADVERTISING SALES MANAGER
Dan Harper
1-603-924-0058
1-800-274-7373
FAX: 1-603-924-9327

TECHNICAL DRAWINGS
Charles Warrington WA1RZW

GRAPHIC DESIGN
Suzanne Côté

GRAPHIC SERVICES
FilmWorks, Inc.
Antrim NH

**GRAPHICS MANAGER/
PAGINATION**
Linda Drew

CIRCULATION
To subscribe: 1-800-677-8838

WAYNE GREEN, INC.

Editorial Offices
70 Route 202N
Peterborough NH 03458
1-603-924-0058;
FAX: 1-603-924-9327

Subscription Services
1-800-677-8838

Foreign Subscribers
1-609-461-8432

Reprints: \$3.00 per article.
Back issues: \$4.00 each.

Write to 73 Amateur Radio Today,
Reprints, 70 Route 202N,
Peterborough, NH 03458.

Printed in the U.S.A. by Quad
Graphics, Thomaston, Georgia.

73 Amateur Radio Today

March 1995
Issue #414

TABLE OF CONTENTS

FEATURES

- 10 **A Practical Weather Satellite Receiving System, Part 1**
Set up your own satellite receiver/decoder.....ZR6UM
- 24 **HF-SAT Antenna**
An easy-to-build dual-band HF satellite antenna.....AC3L
- 26 **Grounding and Lightning Protection, Part 2**
Effective RF grounding for the shack.....W5UOJ

REVIEWS

- 32 **The Azden PCS-7200**
A solid 222 MHz mobile transceiver.....WB2WIK/6
- 38 **Ham University Interactive**
Learn code and theory, and play CW games.....WB6NOA
- 40 **LOGIC 4**
Ham radio software for Windows or DOS.....WA3USG
- 44 **S & S Engineering's PC-1 Programmable Counter Kit**
A low-cost, add-on frequency counter you can build.....AC4HF, Czuhajewski



Build your own satellite receiver and produce images like this fine summer shot of Europe in your own shack. This transmission was received at Z6SAT in Johannesburg, South Africa. To learn more, please turn to page 10.

On the cover: Up, up, and away! This photo was taken from a balloon 95,000 feet over Madison, Wisconsin. The balloon was equipped with GPS and a digipeater facilitating 400-mile QSOs. Photo courtesy of Tim Tomljanovich K9SB, Near Space Science Group. A one-year subscription/extension goes to Tim for this FB photo in the 73 Photo Search.

FB

Editorial Offices
70 Route 202N
Peterborough NH 03458
phone: 603-924-0058

Advertising Offices
70 Route 202N
Peterborough NH 03458
phone: 800-274-7373

Circulation Offices
70 Route 202N
Peterborough NH 03458
phone: 603-924-0058

Manuscripts Contributions in the form of manuscripts with drawings and/or photographs are welcome and will be considered for possible publication. We can assume no responsibility for loss or damage to any material. Please enclose a stamped, self-addressed envelope with each submission. Payment for the use of any unsolicited material will be made upon publication. Please submit all material on disk as an IBM-compatible ASCII file. All contributions should be directed to the 73 editorial offices. "How to Write for 73" guidelines are available upon request. US citizens must include their Social Security number with submitted manuscripts.

73 Amateur Radio Today (ISSN 1052-2522) is published monthly by Wayne Green Inc., 70 Route 202 North, Peterborough NH 03458. Entire contents ©1995 by Wayne Green Inc. No part of this publication may be reproduced without written permission of the publisher. For Subscription Services, write to 73 Amateur Radio Today, P.O. Box 7693, Riverton NJ 08077-7693, or call 1-800-289-0388. The subscription rate is: one year \$24.97, two years \$39.97; Canada: \$34.21 for one year, \$57.75 for two years, including postage and 7% GST. Foreign postage: \$19.00 surface or \$42.00 airmail additional per year. All foreign orders must be accompanied by payment in US funds. Second class postage paid at Peterborough, NH, and at additional mailing offices. Canadian second class mail registration #178101. Canadian GST registration #125393314. Microfilm Edition—University Microfilm, Ann Arbor MI 48106. POSTMASTER: Send address changes to 73 Amateur Radio Today, P.O. Box 7693, Riverton NJ 08077-7693.

Contract: Possession of this magazine constitutes a contract with Uncle Wayne and The Team to just say no to LIDS and conduct a stimulating, intelligent QSO today!

DEPARTMENTS


- 66 Above and Beyond
73 Ad Index
70 Ask Kaboom
52 ATV
81 Barter 'n' Buy
58 Carr's Corner
17 Feedback Index
51 Ham Help
72 Hams with Class
56 Hamsats
64 Homing In
6 Letters
4 Never Say Die
80 New Products
81 Propagation
62 QRP
8 QRX
60 RTTY Loop
78 Special Events
86 Uncle Wayne's Bookshelf

FEEDBACK... FEEDBACK!

It's like being there—right here in our offices! How? Just take advantage of our FEEDBACK list on page 17. You'll notice a feedback number at the beginning of each article and column. We'd like you to rate what you read so that we can print what types of things you like best.

NEVER SAY DIE

Wayne Green W2NSD/1

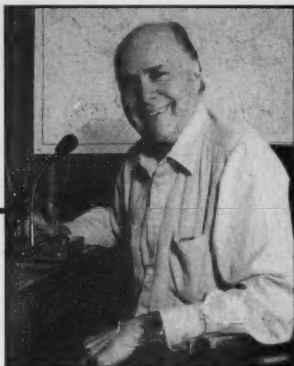

Yes, I'll Be At Dayton This Year

But, as far as I know (and I know pretty far), I won't be speaking this time. However, since less than 1% of the HamVention attendees usually bother to squirm and sweat through one of my endless talks, I doubt I'll be much missed.

Sure, I'd do much better to pick one subject and stick to it for maybe a half hour and then get off the pot . . . er . . . podium. But there are so many interesting things to talk about, and I want to cover them all, that my allotted two hours just barely gets me started.

One of the reasons amateur radio is a hard sell to potential hams is because it's so difficult to explain. Sure, working DX is a part of it. A small part, really. The ham host of a talk show recently said he'd counted 57 different sub-hobbies that make up hamming. I've never tried counting 'em before so I decided just now to see how many I could come up with. I had no problem with counting 53 separate aspects of the hobby that I've pursued down through my 57 years of hamming, and 20 more that I haven't done yet. That added up to a serendipitous number.

How can I cover a 73-hobby group of interests in a two-hour talk? It's worse than that, of course, because I can't help bringing up ham radio history to explain why things are as they are now . . . and what I see ahead for us, drawing on that past. Plus I've been known, on rare occasions, to talk about non-germane subjects like computers, cold fusion, our terrible American school system, and so on. And even to tackle religious matters such as our beloved reminder of Mr. Morse . . . also known by thinking hams as Sam's Curse.

Why Dayton in 1995?

As I explained in an editorial last year, when we here at 73 looked over the cost vs. benefits of exhibiting at Dayton, it didn't make any fiscal sense. With booth costs going through the sky, the cost of flying in an editor, an advertising sales person, and someone to run the booth, plus Wayne to swagger around looking important, and counting the cost of rented cars, hotel rooms, meals, and so on, the tab was up in the thousands.

Then there is the cost of shipping the exhibit booth both ways, plus magazines, books, and so on. Offsetting this we might sell a couple of hundred subscriptions, if it is a particularly good year. With a HamVention special of \$15, that's maybe \$3,000. Sure, that would be pretty good if it didn't cost anything to print and mail the magazine or pay for the staff to produce it.

Why not more sales? Because most of the active hams are already getting 73. They come by the booth and tell us how much they like the magazine and how they read and enjoy my editorials, though they don't always agree with them. Worse, many of the subscriptions are renewals, so we just get less for the subscription and don't gain as many new readers.

The hams who haven't been reading the magazine have no idea what they're missing, so they don't bother to stop by the booth. Many of them are too busy in the flea market to come inside, even when it rains. Which it always seems to do.

Another big problem with getting new subscribers is that over half of the licensed hams don't subscribe to any ham magazines. They're not involved with much more than talking over a local repeater or rag-chewing on 75m, so they have little interest in knowing what's new or trying packet, satellites, and so on.

In the face of all that, it didn't seem like we had much to lose by not shipping in a team from 73 to run a booth. If we took the same money that it would cost to do the booth and invested it in sending direct mail letters to hams, we'd pull around 3-5% in subscriptions. \$4,000 would allow us to mail around 10,000 letters. At a 3% response, that's 300 new subscribers at \$20 each. Get out your hand calculator and you'll see why that beats exhibiting by a long shot. We don't even lose the work on the magazine the staff could be doing during their several days away.

The Big Four-O

So why, with all that, will Wayne be there in 1995? With a booth! Well, the biggest reason is that this celebrates 40 years since I first exhibited at the HamVention, back when it was in the

Dayton Biltmore Hotel downtown. I haven't missed many years. I wonder if there is anyone else who's been coming to the HamVention for 40 years? I'm pretty sure no one else has been exhibiting for that long. Or that anyone else has given nearly as many talks.

When we stopped exhibiting I was not really surprised that last year the committee decided to move my talk to Sunday morning, after about half of the attendees would be already heading home. I got their message and didn't bother to come.

This year, Sherry said what the heck, let's just you and I go. She offered to run the booth so I could go around to see exhibitors and shake hands with old friends. If you've read any of my travel reports you know how cheap Sherry and I travel. Make that economically, it sounds better. If you haven't read my reports yet, for shame, you're missing out. I'll try to remember to bring some to Dayton so you can rectify your serious oversight. I should bring a few copies of my book to autograph too. They sold like crazy at the last few hamfests I've attended.

We buy yearly senior passes on Continental Airlines, which keeps the cost of our flights to a minimum. Well, you'll find out all our economy secrets when you read my travel stories. Who else could fly first class to Munich with his wife, rent an Audi and drive to Vienna, Prague, Krakow, and back to Munich, staying in very nice hotels, visiting hams in each city, and keep the total cost for the flight, car rental, hotels, and meals under \$1,000?

The major expense for the HamVention will be for the booth space, so I hope you'll grab some friends, bring them to the booth, force them to subscribe to both 73 and *Radio Fun*, and buy some of my travel reports. I'll try to spend as much time there as I can so I won't miss you...and I'll be autographing my book, *Declare War*.

Hey, if you make it worth my while, I might celebrate my 41st year at Dayton next year. They're finally changing the HamVention dates next year so it won't come on the same weekend as my WWII submarine crew reunion. I want to get down to Mobile, where our

old boat is on display, to celebrate the 51st year since I last sailed on the *Drum*. I joined the boat in 1943 and was on its last five war patrols. It was an exciting time, with us sinking lots of ships and the Japanese dumping hundreds of depth charges on us. I've a \$7.50 book telling just what it was like. It is made up mostly of reprints of the wartime recollections I wrote for the *Drum Newsletter*, which I published for several years. I've included the Amelia Earhart inside story in this book. Exciting stuff.

Say, if you get a chance, how about dusting off your word processor and letting me know how many years you've been going to the HamVention, what you do there, what bargains you've found, and so on. You might have some interesting stories for *Radio Fun* which would encourage new hams to start coming to Dayton.

For those of you who've made an annual pilgrimage to my talks, I'm sorry I won't be speaking this year. It'll probably be a while before I get back enough in the good graces of the chaps running the show to get on the program with a good time slot again. But, since I don't have anything much of importance to say anyway, you won't have missed much. I may come up with a tape of what I might have said that you can buy. Or a booklet. Unless the cold fusion field breaks wide open and keeps me too busy, which is possible.

Almost probable. I'll be attending the fifth cold fusion conference in Monaco three weeks before the HamVention, so I'll have the latest news on what scientists from all around the world are doing in this incredible new field. I'll try to bring enough copies of the latest issue of *"Cold Fusion"* for you. They've also been selling out at hamfests. Selling out much faster than I ever expected. Golly, I haven't been to Monaco in years! I remember my first time in 1958, when I visited Bill Orr W6SAI, who was summering there with his family. We later became enemies when I opposed "Incentive Licensing" in 1963 and he was being paid to promote it.

This cold fusion business has faxes coming in from my technical advisors in India, France, China, Australia, and the US. Maybe you missed the articles in *Scientific American* on sonoluminescence (Feb. '95).

While Sherry and I are in Europe for the conference we'll take a day or two to visit Paris Disneyland, and another to do the Chunnel train to London, where I'll be getting together with Ron G4OWY. I sure wish you could come along! It's going to be a wonderful conference and trip. Yes, I'll make a day-by-day report available.


Speaking of trips . . . a reminder. If you know or talk to any hams on Yap, Palau, Pohnpei, Truk or Majuro, please let me know how I can get in touch with them. Sherry and I will be visiting there this coming November.

Continued on page 74

COMET


MODERN, MULTI-BAND ANTENNA SYSTEMS

BASE/REPEATER ANTENNA PRODUCTS




Featuring the COMET exclusive SLC System. The SLC actually increases the gain of the Dual/TriBand Antennas. A completely pre-formed phasing coil and phosphorous copper element produces a low-loss, highly effective, high gain antenna. All COMET antennas are pre-tuned and come complete with all mounting hardware. Simply mount to your mast and experience incredible COMET performance!

COMET DUAL-BAND




GP-9(N) Dual-Band 146/446MHz Base/Repeater Antenna

Gain & Wave: 146MHz 8.5dBi $\frac{1}{2}$ wave x 3 VSWR: 1.5:1 or less Max Power: 200W PEP
446MHz 11.9dBi $\frac{1}{2}$ wave x 8 Length: 17' 8" Weight: 5lbs. 11ozs.
Connector: SO-239 (GP-9), N-type (GP-9N) **Mounts to Mast Size:** 1.25"-2.50"
Construction: Heavy duty fiberglass, 3 sections, 92MPH wind survival



GP-6 Dual-Band 146/446MHz Base/Repeater Antenna

Gain & Wave: 146MHz 6.5dBi $\frac{1}{2}$ wave x 2 VSWR: 1.5:1 or less Max Power: 200W PEP
446MHz 9.0dBi $\frac{1}{2}$ wave x 5 Length: 10' 2" Weight: 3lbs. 8ozs.
Connector: Gold-Plated SO-239 **Mounts to Mast Size:** 1.25"-2.50"
Construction: Heavy duty fiberglass, 2 sections, 112MPH wind survival



GP-3 Dual-Band 146/446MHz Base/Repeater Antenna


Gain & Wave: 146MHz 4.5dBi $\frac{1}{2}$ wave VSWR: 1.5:1 or less Max Power: 200W PEP
446MHz 7.2dBi $\frac{1}{2}$ wave x 3 Length: 5' 10" Weight: 2lbs. 8ozs.
Connector: Gold-Plated SO-239 **Mounts to Mast Size:** 1.25"-2.50"
Construction: Single piece fiberglass, 130MPH wind survival

COMET MONO-BAND



CA-ABC23 Mono-Band 146MHz Base/Repeater Antenna

Gain & Wave: 146MHz 7.8dBi $\frac{1}{2}$ wave x 3 VSWR: 1.5:1 or less Max Power: 200W PEP
Connector: SO-239 Length: 14' 12" Weight: 3lbs. 8ozs.
Mounts to Mast Size: 1.25"-2.50"
Construction: Thick-wall aluminum, 3 sections, 70MPH wind survival



CA-712EF Mono-Band 446MHz Base/Repeater Antenna

Gain & Wave: 446MHz 9dBi $\frac{1}{2}$ wave x 12 VSWR: 1.5:1 or less Max Power: 200W PEP
Connector: N-type Length: 10' 5" Weight: 2lbs. 12ozs.
Mounts to Mast Size: 1.25"-2.50"
Construction: Heavy duty fiberglass, 2 sections, 105MPH wind survival



CA-62DB Mono-Band 6 Meter FM Antenna


Gain & Wave: 52MHz 6.5dBi $\frac{1}{2}$ wave x 2 VSWR: 1.5:1 or less Max Power: 500W PEP
Connector: SO-239 Length: 21' 8" Weight: 5lbs. 11ozs.
Mounts to Mast Size: 1.25"-2.50"
Construction: Thick-wall aluminum, 5 sections, 100MPH wind survival

COMET products are available from most major dealers. For customer service, or a complete catalog, please call us at 800/962-2611. We're confident COMET products and accessories will enable you to enjoy Amateur Radio to its fullest!




NCG COMPANIES
1275 North Grove Street, Anaheim, CA 92806
(714) 630-4541 FAX (714) 630-7024

COMET TRI-BAND




GP-15 Tri-Band 52/146/446MHz Base/Repeater Antenna

Gain & Wave: 50-54MHz 3.0dBi $\frac{1}{2}$ wave VSWR: 1.5:1 or less Max Power: 300W PEP
146MHz 6.2dBi $\frac{1}{2}$ wave x 2 Length: 7' 11" Weight: 3 lbs. 1 oz.
446MHz 8.6dBi $\frac{1}{2}$ wave x 4 **Mounts to Mast Size:** 1.25"-2.50"
Connector: Gold-Plated SO-239 **Construction:** Single piece heavy-duty fiberglass, 112MPH wind survival 50MHz band is tunable by radial adjustment, 2MHz band-width.




CX-333 Tri-Band 146/223/446MHz Base/Repeater Antenna

Gain & Wave: 146MHz 6.5dBi $\frac{1}{2}$ wave x 2 VSWR: 1.5:1 or less Max Power: 120W PEP
223MHz 7.8dBi $\frac{1}{2}$ wave x 3 Length: 10' 2" Weight: 3 lbs. 10 ozs.
446MHz 9.0dBi $\frac{1}{2}$ wave x 5 **Mounts to Mast Size:** 1.25"-2.50"
Connector: Gold-Plated SO-239 **Construction:** Heavy duty fiberglass, 2 sections, 112MPH wind survival



GP-93 Tri-Band 146/446/1280MHz Base/Repeater Antenna

Gain & Wave: 146MHz 4.5dBi $\frac{1}{2}$ wave VSWR: 1.5:1 or less Max Power: 300W PEP (146MHz)
446MHz 7.2dBi $\frac{1}{2}$ wave x 3 Length: 5' 7" 200W PEP (446/1.2)
1280MHz 10dBi $\frac{1}{2}$ wave x 6 **Mounts to Mast Size:** 1.25"-2.50" Weight: 2 lbs. 8ozs.
Connector: Gold-Plated N-type
Construction: Single piece heavy duty fiberglass, 112MPH wind survival



GP-98 Tri-Band 146/446/1280MHz Base/Repeater Antenna

Gain & Wave: 146MHz 6.5dBi $\frac{1}{2}$ wave x 2 VSWR: 1.5:1 or less Max Power: 300W PEP (146MHz)
446MHz 9.0dBi $\frac{1}{2}$ wave x 5 Length: 5' 8" 200W PEP (446/1.2)
1280MHz 13.5dBi $\frac{1}{2}$ wave x 12 **Mounts to Mast Size:** 1.25"-2.50" Weight: 3 lbs. 8ozs.
Connector: Gold-Plated N-type
Construction: Heavy-duty fiberglass, 2 sections, 112MPH wind survival

CROSS NEEDLE METERS

- Separate Meter and RF Sensor allows for convenient placement of the meter.
- Cross Needle Meter provides FWD, REF, and VSWR simultaneously.
- The RF-Sensor is a compact design, and has an extremely low-loss circuit.
- Beautifully illuminated when connected to power supply.
- 6 foot cable standard.
- Optional EKS-3 10 foot extension cable for a total of 16 feet between the sensor and meter.
- Compact Size: (L) 4.75" x (W) 1.75" x (H) 3.5"

CMX-1	CMX-2	CMX-3
1.8-60MHz	1.8-200MHz	140-525MHz
0-2KW	0-200W	0-200W
30/300/2KW	20/50/200W	20/50/200W

NEW!



LETTERS

From the Ham Shack

Edward Hutton N3KEX, Oakdale PA I enjoy ham radio tremendously . . . I've worked as a tech in different categories after my discharge, and have always gravitated to the VHF/UHF bands. I have a couple of gripes. After I hear some of the crap on the HF bands, I seriously question the CW requirement . . . why would I want to put up with it? Hams had better start using our other bands, especially the microwave bands. We won a fight over proposed loss of some of these bands; use 'em or cry over them after we've lost 'em, I say. More of us need to utilize 6 meters, my favorite band. Repeater owners/trustees who carry "ghost" repeaters in the repeater directory had best stop this practice . . . one day I'll claim one of these pairs and get my own machine on line. Not my problem if they don't like it.

Six meters is most likely one of our least utilized bands. I'm glad to see manufacturers coming out with new 6 meter mobile rigs, a very smart move. I predict plenty of newcomers to this band . . . I know I will be very happy to greet them.

I enjoy hilltopping with my different radios . . . 6, 2, 220 and 440 capability here. I like to run QRP and see how far I can go; if I don't make any contacts, I still have fun. I try to take some people with me, and hope the practice spreads.

I like to use FM during VHF/UHF contests . . . I never score a lot of points. This irritates the Granddaddies, but it gets plenty of new hams, mostly no-coders. Hell, I'm a no-coder, and may even renew my license as such. I go to school three nights a week, have a wonderful two-year-old son, a baby girl is due in 30 days (she will probably be here by the time you read this), so learning the code is not very high on my list of priorities. Oh yes, I even hold a full-time job—I'm a field technician for Bell Atlantic Network Integration. We install, maintain and administer LANs and WANs. The wireless LAN is coming!

Mr. Green, I truly enjoy your magazine! I promise to talk up 73; you just keep those good articles coming.

Emory Schley N4NCU, Dunnellon FL Wayne, you did it again! In your January 1995 editorial you mentioned the two "twin-three" antennas you erected during your college days. I believe this is the same antenna you said you were going to publish the specs on, in one of your previous columns (about 10 years ago, as I recall). I know you're a busy guy, so I've been patient, but come on—give us the lowdown. Another couple of years and I won't be able to erect antennas any more! Please! Make that pretty please!

Emory—I tried to find that confounded Twin-Three or Twin-Triplex antenna in a recent Handbook, but it's gone. I found it originally in CQ around 1946. It then was in the Radio Handbook for a while. But never mind, I remember the specs. It has two three-wire dipoles spaced 1/6th wave apart, that's about 10' for 20m. I used two 102" x 2" poles

to hang it up. I used rope to the ends of the poles to swing the whole works between two trees or one tree and the house. The three-wire dipoles were made with #14 wire spaced 6" apart. Each dipole is thus 12" wide. Dipoles for 20m are about 32' long. The ends of the three wires are connected and the center element of each dipole is fed with 150-ohm feedline 1/4 wave long (16'). Hmm, do they still make 75- and 150-ohm twinlead? These are connected together, but with the phasing reversed, and fed, in turn, with 300-ohm feedline to the shack. During the high sunspot cycle this baby puts out one whale of a signal at a very low angle broadside to the elements. It's bidirectional, so I had a whopping signal in Europe and the South Pacific with one, and Africa and Asia with the other. You can do a fair job with the ZL-Special antenna which is about the same, but uses 300-ohm twinlead for the dipoles. This was invented by good old W8JK. I had two of 'em swung between two trees and my fraternity house when I was in college. They were about a half wave above the ground. I hung the 10m Twin-Three in the middle of the 20m antennas. . . . Wayne

John W. Slack WA2BGB, Sunrise FL The other night I tuned in on 17 meters and heard a gentleman working remote. He was working 220 MHz through 440 MHz and working on 17 meters. He was experimenting with his audio quality. As it turned out he had hum and some highs on his audio. As his contact went on, some of the pro radio operators got on with nasty comments about his signal.

When I started in radio we were amateur radio hams. If someone had a problem with a rig we put our heads together and tried to help our fellow ham.

I hope this letter will help make some people think before they destroy what radio is all about. It is amateur radio, not pro radio, we as hams are in.

Scott Rorex KI5FC, Imboden AR Wayne, I always read your "Never Say Die" editorial as soon as I receive my issue of 73 Amateur Radio Today. Thanks for the many ideas and encouragement you have provided. I have used some of them, just haven't taken time to give you credit for them. I will try to fix that now.

I at least give you partial credit for my deciding to start my own business using PC-based Interactive Voice Systems in 1991. Most of our systems are used for inbound telemarketing and we now process hundreds of thousands of calls per year. Also, I recently started learning international marketing, which is very interesting, plus goes well with my interest in amateur radio.

Also from your encouragement, I began working with our local school principal, science instructor and computer instructor at Sloan-Hendrix High School with the idea of establishing a school club. We decided that we could interest more students and adults by working

with technology in general while emphasizing amateur radio. Our club's name is North East Arkansas Technology Club (NEAT Club). To generate a little excitement, we organized an open house with amateur radio HF voice, 2m voice, and 2m packet demonstrations, as well as other technology related to amateur radio. For example, radio control model race cars, radio control model airplanes and radio control model helicopters. In addition to these, several PC-based exhibits, such as word processors, spreadsheets, games, CD-ROM, and Interactive Voice were included.

Amateur radio demonstrations were set up and operated by other amateur radio clubs located in Northeast Arkansas. Thanks to the Jonesboro Amateur Radio Club, the Resound Amateur Radio Club, and the Lawrence County Amateur Radio Club for helping with the open house.

We were pleasantly surprised when the regional TV news crew arrived to do a story on the Technology Club's open house. The story was aired during the evening news and night news.

Ron Gang 4X1MK, Kibbutz Urim, Israel I was your longest consistent contributor to the "73 International" column for the past 11 years. Anyone reading my contributions over that period will find a complete chronicling of the remarkable growth and development of amateur radio in Israel.

Warm Ham Ties Between Israel and Jordan Developing: The world was heartened to see the signing of a peace treaty between the leaders of Israel and Jordan. This took place not in some far-away foreign capital, but right on the border between our two countries.

What typifies this developing peace is the warmth of feeling between the people of the two countries and the wholehearted manner in which His Majesty King Hussein has gone into the negotiations and peace-making. The same feeling is found with the Jordanian people themselves, and this is indeed the way a peace should be made.

In amateur radio, as in politics, a lot has been going on behind the scenes. I am still not at liberty to disclose what ham contacts have been before the overt peace process between JY and 4X began. But now embassies have opened, there is mutual tourism between the two countries, and by the time you read this joint ham projects between the amateurs of the two countries should be underway.

In the late summer, shortly after the first public meeting between Prime Minister Rabin and King Hussein in Washington, I nearly fell off a Jerusalem park bench when my CQ on the local repeater was answered by a Jordanian ham in Amman. Other JY hams appeared on the Israeli repeaters and we were impressed by the true warm friendliness of these contacts.

On September 22, 1994, a teenage ham in the town of Arad, Jonathan 4Z9FHB, hunting nearby DX, called CQ on the Amman repeater and was answered by none other than King Hussein JY1 himself! They chatted for four full minutes, during which Hussein passed on his warm greetings to all the radio amateurs of Israel.

In early October, still with no official

ties between Jordan and Israel yet, the first Jordanian amateur visited Israel. Eli 4X4FD of Beersheva learned of the upcoming business visit, phoned up the Jordanian ham who he had already chatted with on the air (direct telephone lines already operating between the two countries) and invited him to stay with him and his family. One evening the JY4 ham stayed with Leslie 4Z5DG at Kibbutz Re'im, and with a dozen southern hams arrived to meet with our new Jordanian friend.

We learned from him that the hams in Jordan were quite keen about ties with Israel. Peace gave them access to 10 VHF and four UHF repeaters in Israel in addition to their UHF and VHF machines in Amman, access to the 4X packet network (and through it a gateway to the world system) and, in short, contact with hundreds of active hams in Israel, greatly enriching their enjoyment of our hobby. We were impressed with the nobility and gentlemanliness of our guest. QSLs for the eyeball QSO were exchanged and, above all, all who were at the get-together came away with the genuine feeling that we had gained a new friend, the greatest of all gains!

There have since been more meetings. Joint projects are planned, like a new repeater to serve both countries on one of the higher mountains in western Jordan. A joint special operation on the international border is planned, with two call signs: 4X4-SALAM ("peace," in Arabic) and JY-SHALOM ("peace," in Hebrew).

For years, the psychological distance between Israel and Jordan was vast, South America seeming closer. Yet suddenly we see how close we are to each other! Amman is but an hour's drive from Jerusalem, and soon cars from each country will be allowed to freely cross the border. Thus we can expect many eyeball QSOs, antenna-raising parties, and who-knows-what. May the future be full of light and joy for us all.

Note: I have purposely not named the Jordanian hams involved (excluding JY1 himself, of course) at this time. The pace of events has been quite rapid and, as is well known, there are more than a few violent opponents to Jordan's ties with Israel. Since some of our new friends have business ties in the rest of the Arab world and have to live peacefully in their reality, I didn't want to cause them any discomfort by naming them. This is out of a deep feeling of respect for our Jordanian colleagues, whose sincerity I don't doubt for a minute.

I'm sure glad to hear that His Majesty JY1 is still active on repeaters. I remember 22 years ago when I smuggled a suitcase with a Standard 34-94 repeater and several HTs through British and Jordanian customs on my way to visit His Majesty. With the help of Blackie JY9BB, I set the repeater up on top of a hill across from his downtown palace so it could cover the whole Amman area. Its call was JY73. With my new call of JY8AA, it was fun saying goodbye to His Majesty, who was at the palace using my old Motorola HYT-220, as I boarded Alia flight to Cairo from way out at the airport via the new repeater . . . Wayne

You get more features for your dollar with the

REP-200 REPEATER

A fully microprocessor-controlled repeater with autopatch and many versatile dtmf control features at less than you might pay for a bare-bones repeater or controller alone!

Kit \$1095; w&t only \$1295!



- Available for the 143-174, 213-233, 420-475, 902-928 MHz bands.
- **FCC type accepted** for commercial service in 150 & 450 bands.
- **Six courtesy beep types**, including two pleasant multi-tone bursts.
- **Open or closed access autopatch**, toll-call restrict, auto-disconnect.
- **Reverse Autopatch**, two types.
- **DTMF CONTROL**: over 45 functions can be controlled by 4-digit dtmf command, via radio or telephone.
- **Owner can inhibit autopatch or re-**

peater, enable either open or closed access for repeater or autopatch, and enable toll calls, reverse patch, kerchunk filter, site alarm, aux rcvr.

- **Change** cw speed and tone, beep delay, tail timer, and courtesy beep type at any time by owner password protected dtmf commands.
- **Auxiliary receiver input** for control or cross linking repeaters.
- **Color coded LED status indicators.**



REP-200T Voice Message Repeater. As above, except includes Digital Voice Recorder. Allows message up to 20 sec. to be **remotely recorded off the air** and played back at user request by DTMF command, or as a periodical voice id, or both. **kit \$1145, w&t only \$1395**



REP-200C Economy Repeater. Like REP-200, except uses COR-6 Controller (no DTMF control or autopatch). Features **real-voice ID**. **Kit only \$795, w&t \$1095**


REP-200N Repeater. Want to use your ACC controller, etc.? No problem! We'll make you a repeater with rf modules only. **Kit only \$695, w&t \$995**

XMTRS & RCVRs FOR REPEATERS, AUDIO & DIGITAL LINKS, TELEMTRY, ETC.

Also available in rf-tight enclosures, and with data modems.

FM EXCITERS: 2W continuous duty. TCXO & xtal oven options. **FCC type accepted for com1 high band & uhf.**

- **TA51:** 50-54, 143-174, 213-233 MHz. **kit \$109, w&t \$189.**
- **TA451:** 420-475 MHz. **kit \$109, w&t \$189.**
- **TA901:** 902-928 MHz, (0.5W out); w&t \$219.




VHF & UHF AMPLIFIERS.

For fm, ssb, atv. Output levels from 10W to 100W. Several models starting at \$99.

FM RECEIVERS:

- **R144/R220 FM RECEIVERS** for 143-174 or 213-233 MHz. **Sensitive** front end, 0.18uV, both crystal & ceramic if filters plus **helical resonator** front end for exceptional selectivity: >100dB at ± 12 kHz (best available anywhere!) Flutter-proof hysteresis squelch: **kit \$149, w&t \$219.**
- **R451 FM RCVR**, for 420-475 MHz. Similar to above. **kit \$149, w&t \$219.**
- **R901 FM RCVR**, for 902-928MHz. Triple-conversion, ... **\$169, w&t \$249.**
- **R76 ECONOMY FM RCVR** for 28-30, 50-54, 73-76, 143-174, 213-233 MHz, w/o helical res, if selectivity >100dB at ± 12 kHz. **Kits \$129, w&t \$219**



R76 MONITOR FM RCVR Kit for 10M, 6M, 73 MHz, 2M, hi-band, or 220 MHz. IF selectivity 60dB at ± 12 kHz. Great for monitoring repeaters, amateur calling frequencies, or packet radio frequencies, and for listening to commercial two-way radio, police/fire frequencies, or weather forecasts. **Good starter kit, too; easy to assemble and align. Kit only \$59!**

- **R137 WEATHER SATELLITE RCVR** for 137 MHz. Special if filters tailored for wideband fm. Lowest cost receiver available. **kit only \$89, w&t \$149.**
- We also have preamps and receiving converters for 137 MHz, and we carry the *Weather Satellite Handbook* by Ralph Taggart.

ACCESSORIES

COR-3 REPEATER CONTROLLER. Features adjustable tail and time-out timers, solid-state relay, courtesy beep, and local speaker amplifier. **kit \$49**


CWID. Diode programmable any time in the field, adjustable tone, speed, and timer. **kit \$59**

COR-4. Complete COR and CWID all on one board. CMOS logic for low power consumption. EPROM programmed; specify call. **kit \$99, w&t \$159**




COR-6. COR & Real Voice ID on one board. Digital ic records up to 20 seconds of your voice.

Can record multiple id messages. Tail and time-out timers, courtesy beep, solid-state relay to key transmitter. **kit \$99, w&t \$149**



Versatile DVR-1 DIGITAL VOICE RECORDER Module. As a **voice ID** or **for repeaters**, records your voice, using the built-in microphone or external mic. Just the thing for **fox hunt** xmt id! May also be used as a **contest caller** to play back one or more messages through your transmitter at the press of a switch. Used as a **radio notepad**, it can record the audio output of a receiver — up to 20 sec. of anything you might want to recall later.



Play back as often as you like through a small external speaker. Extensive manual tells how to use multiple messages and adapt to many applications. **kit \$59, w&t \$99**

TD-4 SELECTIVE CALLING Module. Versatile dtmf controller with 1 latching output. Mutes speaker until someone calls by sending your 4-digit id code. Or use it with a long it zero digit to alert anyone in club. Also may be used to control autopatch or other single device. **kit \$49, w&t \$79**

TD-2 DTMF DECODER/CONTROLLER. 16 digits, programmable, toll-call restrictor. Can turn 5 functions on/off. **kit \$89, wired & tested \$149**

AP-3 AUTOPATCH. Use with TD-2 for repeater autopatch. Reverse patch and phone line remote control are std. **kit \$89, wired & tested \$149**

AP-2 SIMPLEX AUTOPATCH Timing Board. Use with above for simplex operation using a transceiver. **kit \$39**

TD-3 SUBAUDIBLE TONE DECODER/ENCODER. Adjustable for any tone. Especially for repeaters, with remote control activate/deactivate provisions. **kit \$29, wired & tested \$59**

DATA MODEMS

MO-202 FSK DATA MODULATOR & DE-202 FSK DEMODULATOR. Run up to 1200 baud digital signals through any fm transmitter & receiver. Radio-link computers, telemetry, etc. **kit ea \$49, w&t ea \$79**



9600 BAUD DIGITAL RF LINKS. Low-cost packet networking system, consisting of MO-96 Modem and special versions of our 144, 220, or 450MHz FM Transmitters and Receivers. Interface directly with most TNC's. Fast, diode-switched PA's output 15 or 50W. **CALL.**

Low Cost GaAsFET PREAMPS

LNG-(*)

ONLY \$59
wired & tested



FEATURES:

- **Very low noise:** 0.7dB vhf, 0.8dB uhf
- **High gain:** 13-20dB, depends on freq
- **Wide dynamic range** - resist overload
- **Stable:** low-feedback dual-gate FET

*Specify tuning range: 28-30, 46-56, 137-152, 152-172, 210-230, 400-470, 800-960 MHz.



LNW-(*) MINIATURE PREAMP

ONLY \$29 kit, \$44 wired & tested

- GaAs FET Preamp similar to LNG, except designed for **low cost & small size.** Only 5/8" w x 1-5/8" l x 3/4" h. Easily mounts in many radios.

*Specify tuning range: 25-35, 35-55, 55-90, 90-120, 120-150, 150-200, 200-270, 400-500 MHz.

LNS-(*) IN-LINE PREAMP



ONLY \$89 kit, \$119 wired & tested

- GaAs FET Preamp with features similar to LNG series, except **automatically switches out of line during transmit.** Use with base or mobile transceivers up to 25W. Tower mounting brackets incl.

*Tuning range: 120-175, 200-240, or 400-500.

HELICAL RESONATOR PREAMPS

GaAs FET preamps with helical resonators **reduce intermod & cross-band interference** in critical applications.



MODEL HRG-(*), \$30 vhf, \$110 uhf.

*Specify tuning range: 142-150, 150-162, 162-174, 213-233, 420-470.

RECEIVING CONVERTERS

Low noise converters to receive vhf and uhf bands on a 10M receiver.



- Input ranges avail: 50-52, 136-138, 144-146, 145-147, 146-148, 220-222, 222-224 MHz, 432-434, 435-437, 435.5-437.5, and 439.25 (to chan 3).
- **Kit less case \$49, kit w/case & BNC jacks \$74, w&t in case \$99.**

TRANSMITTING CONVERTERS



XV2 for vhf and XV4 for uhf. Models to convert 10M ssb, cw, fm, etc. to 2M, 220, 222, 432, 435, and atv. 1W output. **Kit only \$89.** PA's up to 45W available.

- Buy at low, factory-direct net prices and save!
- For complete info, call or write for free catalog. (Send \$2 for overseas air mail.)
- Order by mail, fax, or phone (9-12 AM, 1-5 PM eastern time).
- Min. \$5 S&H charge for first pound plus add'l weight & insurance.
- Use VISA, Mastercard, check, or UPS C.O.D.

hamtronics, inc.

65-D Moul Rd; Hilton, NY 14468-9535

Phone 716-392-9430 (fax 9420)

Westlink Goes Under

A major ham newsletter has bitten the dust after 13 years and 330 issues. Publisher Burt Hicks WB6MQV announced that the January 1, 1995, issue of the *Westlink Report* would be the last. "I would like to think that what we have done in the past thirteen years has made a difference for good in the hobby. We know we have influenced some decisions of the Federal Communications Commission as well as informed a few members of Congress, and perhaps helped shape the public debate on issues of interest to amateurs," said Hicks.

The demise of *Westlink* is not a total surprise. The newsletter has been fighting a well-known financial struggle for about eight years. But Hicks says it was lack of ZZZs rather than lack of \$\$\$s that finally caused *Westlink* to fold. He says four to five hours of daily sleep is simply not enough to keep publishing *Westlink* while working the graveyard shift as a Fox Television Engineer.

There are only two other national newsletters comparable to the *Westlink Report*: the *ARRL Letter* and the *W5YI Report*. Hicks calls the League's newsletter "professionally done," but adds that it lacks editorial freedom. The *W5YI Report*, on the other hand, had only three amateur radio stories in the last issue received. *W5YI* was also responsible for erroneous reports of a major financial disaster here at 73. The *W5YI Report* based that story on interviews with disgruntled former Wayne Green, Inc. employees. *TNX Westlink Report*, No. 687, January 1, 1995.

AMSAT Phase 3-D Under Construction and On Schedule for April 1996 Launch!

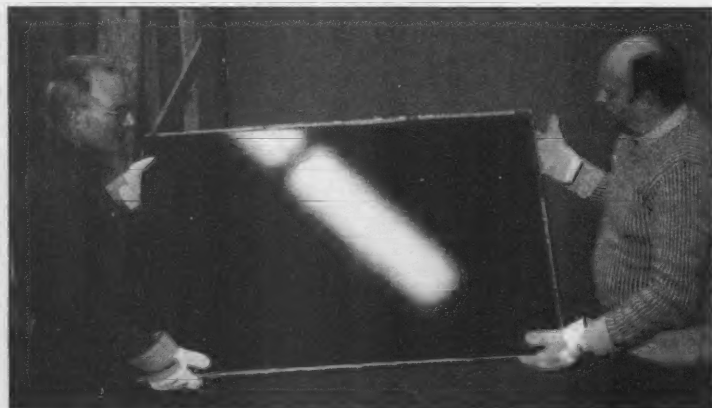


Photo A. AMSAT-NA V.P. Engineering Dick Jansson WD4FAB (L) and Executive V.P. Keith Baker KB1SF (R) inspect one of the flight model solar panels for amateur radio's newest and most advanced satellite. Working at the P3-D Lab at Weber State University in Ogden, Utah, the men display the Kapton electrical insulation layer. These panels, valued at more than \$50,000, were donated to the project. (Photo by Ralph Butler, Weber State University.)

Vibroplex Bought by Ham

The venerable Vibroplex company, manufacturer of the original "bug" and a number of other types of keyers, has been acquired by Mitch Mitchell, Jr. WA4OSR. Mitch says "The Vibroplex name is older than amateur radio and has come to represent the one piece of equipment in the ham shack that symbolizes the interest, camaraderie, and esprit de corps of the worldwide ham radio community."

Besides the bug, the company plans to continue manufacturing Iambic, Vibrokeyer, and Brass Racer keys at consolidated headquarters in Mobile, Alabama. Mitch also hints that some new products will be introduced from Vibroplex very soon.

Social Interface Coming

Microsoft Chairman Bill Gates said, "We are just at the beginning of the social interface," in a recent article in *Electronic Engineering Times*. His comments were made in conjunction with the release of Microsoft's new Graphical User Interface (GUI) named "Bob," which was recently unwrapped at a major Las Vegas consumer electronics convention. "Bob" uses cartoons instead of icons and menus as a means of communication between human beings and computers.

"Bob" sits atop Windows and allows users to toggle back and forth to the cartoon characters at any time for assistance. Smiley faces, cats, and parrots all greet the user in colorful "rooms" which represent basic aspects of the program, such as e-mail or

word processing. Gates says this type of social interface is a key component in realizing the vision of the home filled with smart devices. In an effort to make these devices fun to use, researchers have determined that humans tend to relate more easily with animated beings in a polite, interactive manner, almost as if the device were human.

While some observers found the "Bob" GUI a little too cute, many others are expected to jump on the bandwagon. Expect to see more and more electronic attempts at social interfacing, especially in markets filled with members of the maturing MTV generation. *TNX Electronic Engineering Times*, January 16, 1995.

FAR Scholars Sought

The nonprofit Washington, D.C., based Foundation for Amateur Radio will once again coordinate the distribution of 56 scholarships from a variety of donors for the academic year 1995-96. Licensed radio amateurs may compete if they plan to pursue full-time studies beyond high school and are enrolled or have been accepted for enrollment at an accredited university, college, or technical school.

The FAR Scholarships range in value from \$500 to \$2,000 each. Some have restrictions. More information and an application form may be requested before April 30, 1995, from *FAR Scholarships*, 6903 Rhode Island Avenue, College Park, MD 20740. *TNX W5YI Report*, January 15, 1995.

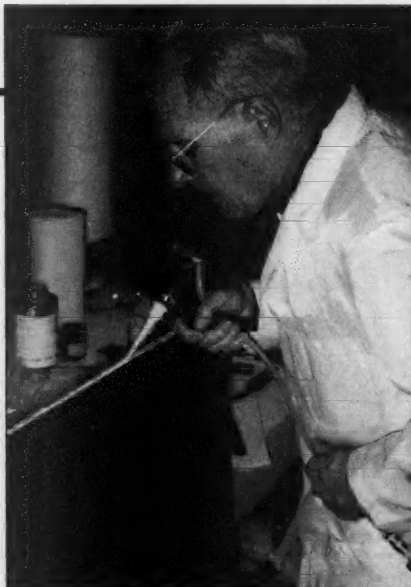


Photo B. Later, Jansson applied epoxy resin to the edge of one of the panels, which are constructed of 1/2" thick aluminum honeycomb material covered by a thin carbon composite facesheet. Each panel weighs only a few kilograms. (Photo by Keith Baker KB1SF.)

Now The Company That Takes You Around The World Lets You Take The World Around With You.



The Drake SW8 – Finally, Professional Desktop Performance In An Affordable, Portable World Band Shortwave.

The company that has been setting the standards in premium-quality world band shortwave performance now puts top-of-the-line features and technology at your fingertips with the SW8...wherever you want to take it. Designed for both desktop use and easy portability, the


Drake SW8 includes many of the same features that have made Drake a perennial favorite of experts – superb audio, versatility, and the unique combination of professional quality and functional simplicity. So tune in the world and get the best of all worlds – quality and affordability, desktop

technology and portability.

The Drake SW8.

To order your SW8 direct, for more information, or for the dealer nearest you call:

1-800-968-7753

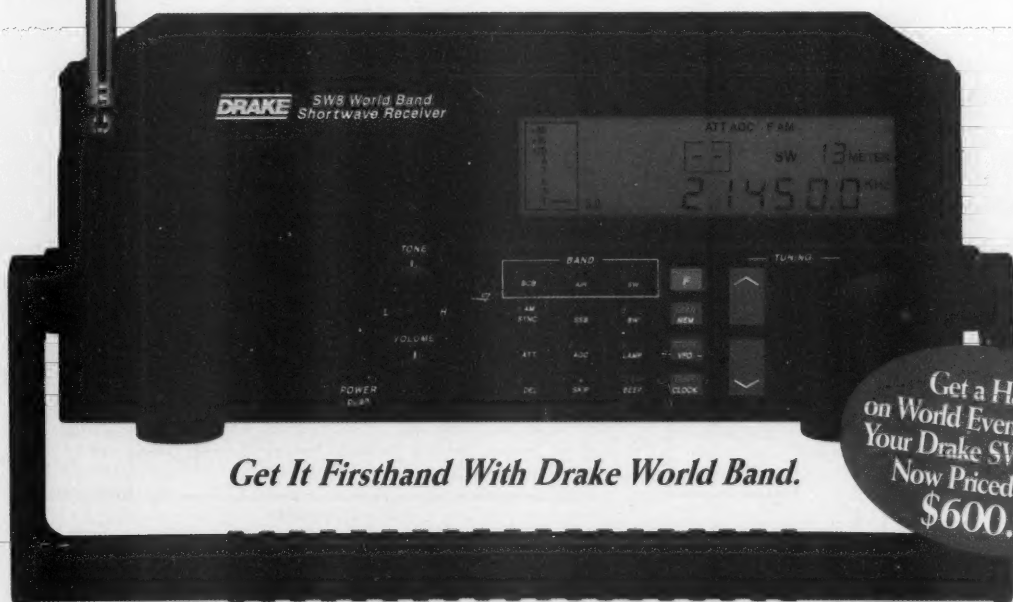

Get It Firsthand With Drake World Band.

Get a Handle
on World Events...Order
Your Drake SW8 Today.
Now Priced under
\$600.00

R.L. Drake Company • P.O. Box 3006 • Miamisburg, OH 45343 • U.S.A.

©1994 The R.L. Drake Company

CIRCLE 147 ON READER SERVICE CARD

A Practical Weather Satellite Receiving System, Part 1

Set up your own weather satellite receiver/decoder.

by Angus Anderson ZR6UM

Weather satellites are the penniless technologist's dream come true. How else can an average person look onto the earth's surface from space?

I have been avidly interested in weather satellites for years now, but it took a series of articles by Dr Ralph Taggart WB8DQT in 73 magazine, as well as his excellent publication *The Weather Satellite Handbook*, to get me off my backside and do something about implementing a useable system. I have not been disappointed.

This begins our two-part series on home-building a weather satellite receiving system for Automatic Picture Transmissions (APT) from polar orbiting satellites, using a PC for display and picture storage. The system is flexible and, best of all, uses a sophisticated shareware software display package written

by Eberhard Backeshoff DK8JV. This first part of the series will cover the receiver and APT demodulator, and next month the second part will cover the PC parallel interface and a review of the features of the JVFAX 6.0 software package.

We will not be able to cover the construction of a 137 MHz receiver or 1691 MHz down converter in these two articles. However, I gladly offer the kits for these items, with construction manuals, and details of other suppliers of receiving equipment are given below. The two parts of this article will cover decoder, interfaces, and display software only.

Like most hams who like to experiment with radios, I have had to learn the hard way about the pitfalls that await the unwary when setting up a weather satellite receiving

and display system. Living at a QTH near the tip of Africa, access to information and specialized components can be difficult and expensive. This article will pass on some of my experiences in building the equipment.

Receiving Options

You really only have two options when receiving lower resolution weather satellite pictures directly from space. The first option is to set up a 137 MHz receiving system to receive and decode the pictures directly transmitted from polar orbiting satellites in the APT format. There are a number of these satellites in operation—at the time of this writing, the American NOAA 10, NOAA 12, NOAA 13 and NOAA 14 spacecraft are transmitting pictures. Also transmitting are the Russian METEOR (and sometimes

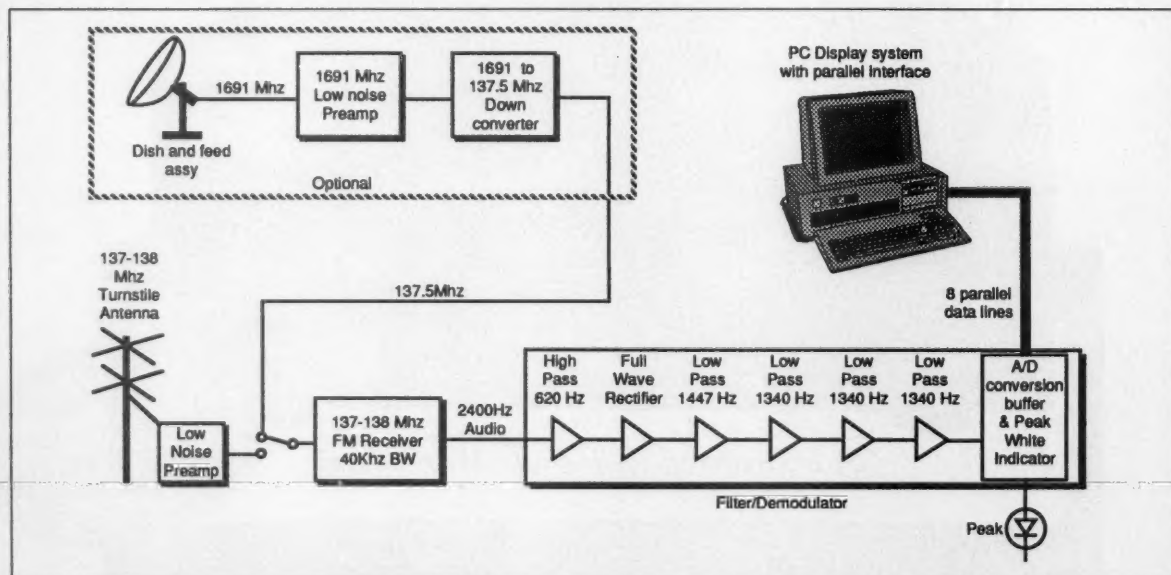


Figure 1. Block diagram of a typical weather 137 MHz satellite receiving system.

MFJ HF/VHF SWR Analyzer™

... Read your antenna SWR from 1.8 to 170 MHz continuously ... built-in 10 digit LCD frequency counter ... smooth vernier tuning ...

MFJ-259 handheld

MFJ-259 Universal SWR Analyzer™ '219' lets you read your antenna SWR from 1.8 to 170 MHz quickly and easily without any other equipment!

MFJ's exclusive RF Resistance Meter™ lets you measure RF resistance up to 500 ohms at minimum SWR.

Has built-in 10 digit LCD frequency

counter and smooth vernier tuning.

You get four instruments in one ... 10-digit frequency counter ... RF signal generator ... SWR Analyzer™ ... RF Resistance Meter™

Measure antenna resonant frequencies and 2:1 SWR bandwidths. Adjust mobile antennas, antenna tuners and matching networks in seconds.

Measure RF resistance, inductance, capacitance, resonant frequency of tuned circuits, transmission line velocity factor / impedance / loss. Test RF chokes, baluns.

MFJ-209, \$109.95, same as MFJ-259 less frequency counter and RF Resistance Meter™

See free MFJ catalog for complete line of MFJ SWR Analyzers™.

MFJ-949E 300 W Tuner



World's most popular antenna tuner covers 1.8-30 MHz, has lighted peak/average Cross-Needle SWR/Wattmeter, 4:1 balun for balanced lines and full size 300 watt dummy load.

Versatile 8 position antenna switch lets you pre-tune MFJ-949E into dummy load to minimize QRM.

Custom inductor switch was carefully engineered to withstand extreme voltages and currents.

Cabinet is chemically etched to MFJ's bond tough baked-on paint.

VHF/HF Packet TNCs

MFJ-1270C '119'

MFJ-1270C super TAPR TNC one has a world wide reputation as the most reliable packet TNC in the world -- many work 24 hours a day for years without a single failure!

Fully TAPR TNC-2 compatible. HF and HF operation, free AC power supply, new enhanced mailbox expandable to 512K with auto/reverse mail forwarding, WeFAX mode lets you print weather maps, optional plug-in 2400/9600 baud modems, ISS interface, MFJ Host mode.

MFJ TNC/Mic Switch

MFJ-1272B '14'

Switch between your TNC or microphone by pushing a button!

Just plug pre-wired cables into your rig's mic connector and TNC.

Plug-in jumpers let you use nearly any rig with 8 pin mic connector.

MFJ-1272B, \$34.95 /MFJ/TAPR TNC2 ones: MFJ-1272BX/PK-232;

MFJ-1272BYV/KAM VHF/KPC3;

MFJ-1272BYH/KAM HF Port;

MFJ-1272BZ/PK-88, \$39.95 each.

or 8 pin RJ45 modular phone jack reverse B with M in model number above.

Regenerative RCVR Kit

MFJ-8100K '99' kit

MFJ-8100W '79' wired

Build this regenerative shortwave receiver kit and listen to shortwave signals from all over the world with just a 10 foot wire antenna.

Has RF stage vernier reduction drive, smooth regeneration, five bands.

MFJ-1278B Multi-Mode Data Controller

Use this MFJ-1278B, your transceiver and computer to transmit and receive digital communications! You'll discover a whole new world of ham radio and communicate in ways you never knew existed on our ham bands.

The world class MFJ-1278B Multi-Mode and MultiCom™ software is packed with features no other multi-mode gives you.

You get 10 digital modes ... Packet, AMTOR, PACTOR (at no extra cost), RTTY, ASCII, Navtex, Color SSTV, 16 Gray Level FAX, CW and Memory Keyer plus an enhanced 32K Mailbox.

You'll have fun joining worldwide packet networks and exchanging color SSTV pictures with your buddies around the world. You'll marvel at full color FAX news photos as they come to life on your screen. You'll see weather changes on highly detailed weather maps in all 16 gray levels. You'll eavesdrop on late breaking news as it happens on RTTY. You'll enjoy error free HF QSOs on PACTOR and AMTOR and receiving packet mail in an enhanced 32K mailbox. Want to copy some CW? Just watch your screen.

MFJ-1289, \$59.95, MultiCom™ software and cables.

MFJ halfwave vertical Antenna

6 bands: 40, 20, 15, 10, 6, 2 Meters ... No radials or ground needed!

Operate 6 bands -- 40, 20, 15, 10, 6 and 2 Meters -- with this MFJ-1796 '199'

ground independent halfwave vertical antenna! No radials or ground ever needed!

It's only 12 feet high and has a tiny 24 inch footprint! You can mount it anywhere from ground level to the top of a tower -- on apartments, condos, small lots, even on motorhomes. Perfect for vacations, field day, DX-pedition, camping.

Frequency selection is fully automatic -- all you do is transmit. Its low angle of radiation really reaches out and brings in DX. Omni-directional. 1500 watts PEP.

Efficient end loading, no lossy traps. Entire length is always radiating. Full size halfwave on 2 and 6 Meters. High power air-wound choke balun eliminates feedline radiation. Adjusting one band has minimum effect on other bands. Add \$20 s/h.

Easy to assemble -- you'll have it on the air in an afternoon.

MFJ's world famous 3 KW Versa Tuner V

Here's why the MFJ-989C '349' 989C is the finest 3 KW antenna tuner money can buy ...

Two massive 250 pf transmitting variable capacitors can handle amps of RF current and 6000 RF volts. Logging scales.

Precision ball bearing roller inductor, three digit turns counter and spinner knob give you exact inductance control for minimum SWR.

Lighted peak/average Cross-Needle SWR/Wattmeter has 200/2000 watt ranges. Super heavy duty current balun has two giant 2 1/2 inch powder iron toroid cores wound with Teflon® wire.

Six position ceramic antenna switch has extra large contacts. Flip stand, dummy load, one year unconditional guarantee, aluminum cabinet, tough baked-on paint, locking compound on nuts/bolts, handles 3 KW PEP, 10/16x4 1/2x15 in. Meter lamp needs 12 volts. Add \$13 s/h.

MFJ No Matter What™ Guarantee

MFJ's famous one year No Matter What™ unconditional guarantee means we will repair or replace (at our option) your MFJ product sold in this ad no matter what for a full year.

Super Hi-Q Loop Antenna

MFJ-1786 '299'

Tiny 36 inch diameter high efficiency loop antenna covers 10-30 MHz continuously with low SWR. Handles 150 watts.

Ideal for home installations where space is limited-- apartments, condos, small lots. Take on trips.

All welded construction.

Remote control has Automatic Band Selection™, Cross-Needle SWR/Wattmeter. No control cable needed. Use batteries or 110 VAC. Add \$20 s/h.

No ground or tuner needed.

MFJ-1782, \$219.95, like MFJ-1786 but remote control has only slow/fast tune buttons.

Dual Band Mobile Ant.

Mobile Antenna for 144/440 MHz

MFJ dual band magnet mount mobile antenna for 144/440 MHz has 19 inch stainless steel radiator, low SWR. For mobile rigs with SO-239 UHF connector and handie-talkies with included BNC adapter.

5/8 Wave Mobile Ant.

Maximum Gain™ 5/8 '24'

Wave 2 Meter magnet mount mobile antenna has stainless steel radiator, 12 ft coax, low SWR. UHF mobile (MFJ-1728) or BNC handie-talkie (MFJ-1728B) connector.

5/8 Wave Ground Plane

\$19.95 gets MFJ-1750 you a 2 Meter 5/8 '19'

wave ground plane home station antenna! You get the highest gain of any single element antenna, shunt fed matching, ceramic insulators. MFJ-1752, \$19.95, for 220 MHz.

Free MFJ Catalog

Write or call ... 800-647-1800


Nearest Dealer/Orders: 800-647-1800 Technical Help: 800-647-TECH (8324)

• 1 year unconditional guarantee • 30 day money back guarantee (less s/h) on orders from MFJ • Free catalog

MFJ ENTERPRISES, INC. Box 494, Miss. State, MS 39762 (601) 323-5869; 8-4:30 CST, Mon-Fri. FAX: (601) 323-6551; Add \$6 s/h


MFJ ... making quality affordable Prices and specifications subject to change © 1993 MFJ Enterprises, Inc.

DIPOLE CONSTRUCTION (1 of 2)

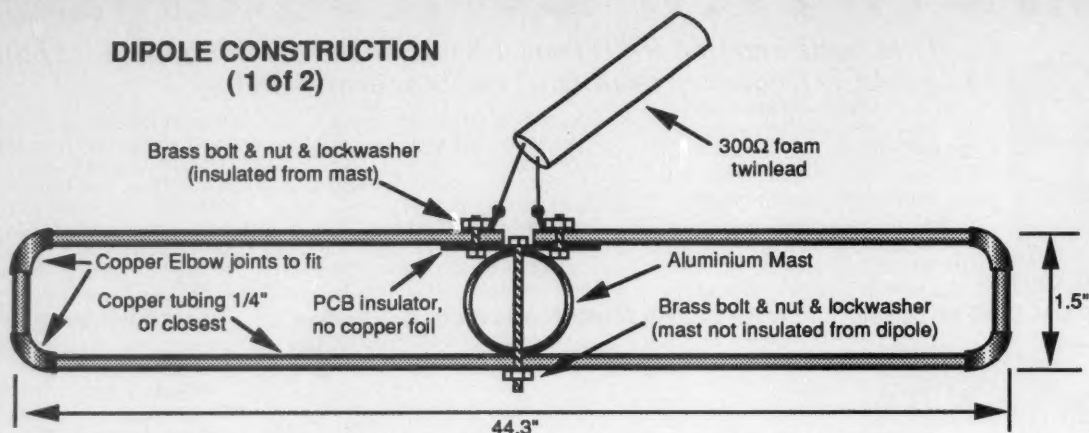


Note: Make insulator out of 3"x2" piece of PCB material with no copper cladding. Depending on the diameter of your mast, you might have to add a washer between the mast and the PCB insulator to keep dipole elements parallel. Weatherproof all connections.

ANTENNA ASSEMBLY

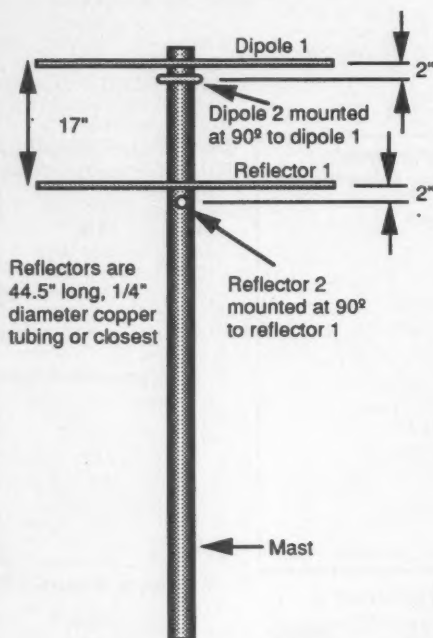

FEED & PHASING LINE CONSTRUCTION

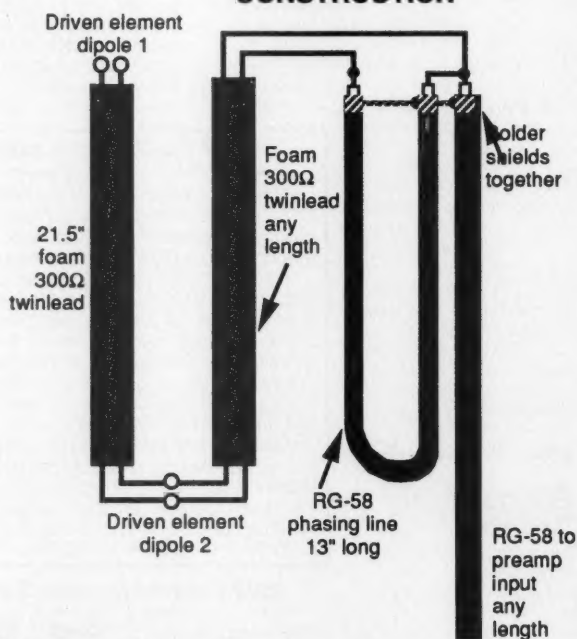

This antenna design thanks to Ralph Taggart, WB8DQT

Figure 2. Turnstile antenna for receiving polar orbiting satellites.

COSMOS) satellites, which can provide spectacular pictures due to their strong signals and excellent visible picture resolution.

Polar orbiting weather satellites can give better resolution of geographical features than the geostationary satellites, due to their lower altitude. This can be a bonus on home-built equipment. Because their orbit is at about 950 km altitude (as opposed to the 35,000 km altitude of the geostationary

birds), you can usually resolve surface features better. The NOAA scanning radiometer optics correct for horizon distortion, yielding natural-looking pictures with a geometry that mostly looks like what you would expect to see on a map. This makes it easy to identify ground features from an atlas.

The second option is to implement an S-band receiving downconverter with a small dish or long yagi antenna to receive

the geostationary GOES or METEOSAT transmissions. The S-band downconverter receives signals at 1691 MHz and converts this signal to 137.5 MHz—this can feed the input of your existing 137 MHz receiver. Transmission formats for both systems are similar, so the results of both can be displayed on your PC screen. Pictures from GOES or METEOSAT are not as detailed as the pictures from a polar orbiter (they can

BUY SMART

SG-230 Smartuner®

Antenna Coupler

SSB, AM, CW & DATA

You can't buy a smarter tuner than this. An automatic antenna coupler so intelligent it precisely tunes any length antenna -8 to 80 ft-in the HF band.

The Smartuner® automatically evaluates and switches 64 input and 32 output capacitance combinations, plus 256 inductance combinations in a "pi" network. The amazing result is over a half-million different ways to ensure a perfect match for your transceiver. And the most intelligent feature of all is that the Smartuner remembers the chosen frequency and tuning values, and will automatically reselect those values -in less than 10 ms, each time you transmit on that frequency.

The SG-230 Smartuner.® Buy smart.

SGC		WARRANTY REGISTRATION CARD	
Card must be mailed within 10 days of purchase to validate warranty.			
NAME: <u>J. MARTINO</u>	VESSEL NAME: <u>APRIL 24</u>		
ADDRESS: <u>SEE BELOW</u>			
TELEPHONE: _____	SERIAL: <u>NBR0490884</u>	VOLTAGE: <u>12V</u>	
MODEL: <u>SG-230</u>	PURCHASED FROM: <u>SGC</u>	DATE INSTALLED: <u>1 DEC 89</u>	
DATE PURCHASED: <u>1 MAR 89</u>	DATE INSTALLED: <u>1 DEC 89</u>		
INSTALLED BY: <u>J. MARTINO (OPERATOR)</u>	YOUR COMMENTS: <u>WHAT CAN I SAY! FIRST CONTACT NEAR MOSCOW 5-5</u>		
CAPE TOWN DEPT OF STATE WASH DC 20521			

PERFORMANCE INFORMATION	
LENGTH OF TIME TO INSTALL: <u>5 hrs</u> (WITH COPE STRIP)	
WAS SATISFACTORY TEST CALL MADE? <u>YES</u>	
DISTANCE COMMUNICATED: <u>USSR/JAPAN/N.Z.</u>	
Circle One INSTALLATION: <input checked="" type="radio"/> Simple <input type="radio"/> Difficult TUNING: <input checked="" type="radio"/> Simple <input type="radio"/> Difficult TEST CALL: <input checked="" type="radio"/> Good <input type="radio"/> Fair <input type="radio"/> Poor VOICE QUALITY: <input checked="" type="radio"/> Good <input type="radio"/> Fair <input type="radio"/> Poor	



MICROPROCESSOR CONTROLLED • NON-VOLATILE MEMORY • WATERPROOF • B.I.T.E. INDICATOR • 1.8 TO 30 MHZ RANGE
10 TO 150 WATTS INPUT POWER • 10ms RETUNING TIME • 8 to 80 ft. ANTENNA (all types)

SGC
NO COMPROMISE
COMMUNICATIONS



SGC INC. SGC BUILDING P.O. BOX 3526 BELLEVUE, WA 98009 TEL. (206) 746-6310 FAX: (206) 746-6384

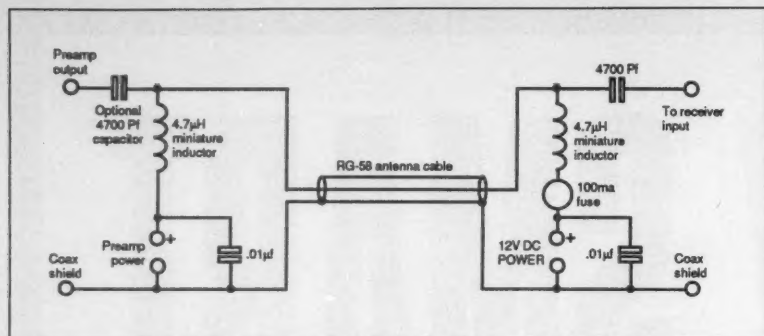


Figure 3. Feeding 12 VDC power to the preamp through the coax feed.

come close), but an added bonus is that the ground computers on the geostationary satellites add political boundaries and latitude and longitude marks to the picture, which makes it easier to orient yourself with an atlas.

For those of you who want to receive transmissions from the geostationary satellites, suitable equipment to implement a downconverter is advertised in the pages of 73 magazine. Some suppliers that I have seen are Spectrum International, Down East Microwave, and Quorum Communications.

Figure 1 shows a block diagram of a typical weather 137 MHz satellite receiving system, with an optional 1691 to 137.5 MHz downconverter. The down-converter feeds the input of a sensitive dual-conversion 137 MHz receiver with a 40 kHz IF bandwidth, and an FM demodulator for 1691 MHz signals, or is directly fed from the 137 MHz antenna through a low noise preamplifier for the polar orbiters. The demodulated signal at the output of the receiver consists of a 2400 Hz tone, which varies in amplitude with changes in brightness in the picture. The 2400 Hz tone is fed through a series of active filters, and is rectified to give a voltage which varies proportionally with picture brightness. This voltage is fed to an A/D converter, which converts the voltage to parallel 8-bit format at TTL levels. Each picture cell represents an 8-bit value (255 grayscales), and 800 or more cells (pixels) appear on the 8-bit parallel interface lines every quarter of a second! The 8-bit parallel TTL signal is routed to the PC display system via a parallel I/O interface in the PC.

The Antenna

Signals from all polar orbiting satellites exhibit changes of polarization and Doppler shift when being received by a ground station. This is because the spacecraft is moving fast with respect to the receiving station. Horizontally and vertically polarized antennas, such as those found in terrestrial installations, exhibit what is called linear polarization. NOAA satellites have Right Hand Circular Polarization (RHCP), where the po-

larization actually travels in a circular path as it moves through space. Using an antenna with linear polarization on NOAA spacecraft will present the user with deep, slow nulls of 20 dB or more in the received signal at the station as polarization changes. METEOR spacecraft, on the other hand, have linear polarization. With a circularly polarized receiving antenna of the correct sense, a linearly polarized signal such as is transmitted from METEOR spacecraft will show on-

"My installation is proof that WB8DQT turns out designs that not only work well, but are repeatable in construction—mine went together with no trouble at all."

ly some 3 dB loss, and NOAA signals can be received at full strength. While it is possible to build gain antennas with circular polarization and manual or automatic antenna tracking facilities, very good results can be obtained by building a simple crossed dipole with a reflector for each dipole, which is mounted facing vertically upwards. This antenna design is generally called a Turnstile. The Turnstile antenna, while being largely non-directional, will receive circularly polarized signals at full strength—exactly what we want. However, the lack of antenna gain

on the turnstile will often make an antenna preamplifier necessary to receive noise-free pictures.

Figure 2 shows the details of a suitable turnstile antenna for receiving polar orbiting satellites. This design was taken from the *father* of cheap weather satellite reception, WB8DQT, and was originally called the *Satellite Zapper*. Apart from the use of copper plumbing tubing for the elements, the design is as the original. My installation is proof that WB8DQT turns out designs that not only work well, but are repeatable in construction—mine went together with no trouble at all. The diagram should give all the information necessary to implement a useable antenna.

With the addition of a suitable low-noise preamplifier mounted on the mast, I can get a full quieting signal on a good South-North pass at my QTH (30 km north of Johannesburg, South Africa) from the time the spacecraft rises to an elevation of 4 to 5 degrees above the horizon, to the time just before it sets. This equates to Prince Edward Island in the South Indian Ocean to Lake Victoria in Central Africa. A good S-N pass is one that rises to an elevation of 60 degrees or more above the horizon.

I used 1/2" copper tubing for all elements, available from plumbing shops. This was cut to length, and the folded part of the dipole formed by 90-degree copper elbows which fit over the tubing. The elements are soldered together with ordinary solder, using a 60-watt soldering iron, and form a rigid assembly. Let the solder flow right into the joints. Flatten the free ends of the dipole, and drill holes to accept the 300 ohm

twin lead and the insulator which is made from a small piece of Fiberglass PCB material with the copper removed. This is fastened together by brass bolts, cable tags, and washers. The dipoles are fastened to the mast as shown, with the second dipole being 2" below the first, and at 90 degrees to it. The reflectors are mounted 17" below the dipoles by drilling a hole through the mast and fastening the reflectors to the mast with a suitable self-tapping screw. Your mast should be made of aluminium tubing, with the diameter about 1.25" or less. Drill the

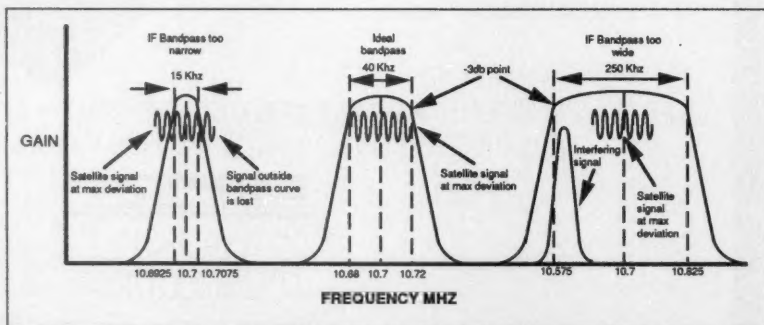


Figure 4. The ideal IF passband should have as flat a top as possible.

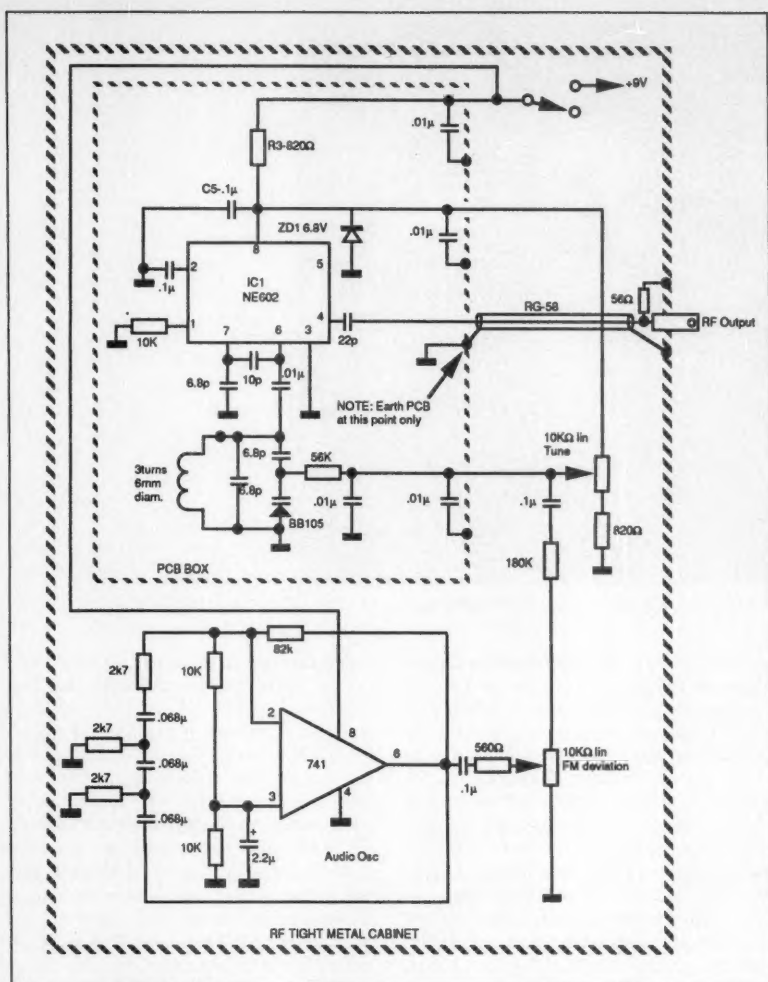


Figure 5. Circuit for a varicap-tuned FM signal source, based on the NE602 chip.

hole in the mast slightly larger than the one in the reflector element, which should be of the right size to accept the self-tapper. A quarter-wave delay line is made with RG58 coax, and soldered as shown.

When constructing the antenna, use good quality foam core 300 ohm twin lead and good quality RG-58 coax (don't go for bargain basement cable), and make sure that the preamplifier is adequately weatherproofed. Suitable mast mounting enclosures for the preamplifier are available from TV suppliers. Loop the cables to enter and exit at the bottom of the enclosure so that moisture drips off and does not creep in. Although it is possible to build your own preamplifier, really hot performers are available already built from a number of suppliers in the pages of 73 magazine. I like the Hamtronics LNA series GaAsFET units because in my opinion they provide unbeatable value for money, as well as having a 0.7 dB noise figure and lots of gain. They are also easy to retune from 144 MHz to 137.5 MHz without changing the noise figure, which was set to optimum at the factory. Since system perfor-

mance is determined almost exclusively by the noise figure of the preamp, this is an important point. [Manufacturer's note: Hamtronics now offers the LNG-137 Series, \$59, already tuned to WX SAT frequencies.]

The most convenient way to feed 12 VDC

power to the preamp is through the coax feed. Figure 3 shows how this is achieved with the use of two inductors and some capacitors. Make sure that there is a blocking capacitor at the output of the receiver and the preamplifier. You can, of course, also use a separate wire to feed the DC, using the antenna coax shield as a return. Remember to fuse the feed with a 100 mA miniature fuse.

The Receiver

Your 137 MHz receiver should have an IF bandwidth of 40 kHz to receive decent pictures. Too narrow an IF bandwidth will not allow the full FM deviation (frequency swing) from the spacecraft to be accommodated in the passband, resulting in useless pictures, although the signal will be strong. Too wide an IF bandwidth will decrease receiver sensitivity and allow interfering signals to creep into the IF passband. Most scanning receivers that cover the 137 MHz band either have too narrow an IF bandwidth (NFM position is about 15 kHz) or too wide (WFM position is about 250 kHz). Optimizing your existing scanner would require changing some of the IF filters, not something for the faint of heart! I have been able to receive usable pictures with my AOR-2002 scanner set to the FM "wide" position, but only with a good preamplifier in line, and with a gain antenna. In other words, you will need lots of signal into the receiver if you use a wide passband. The optimum 40 kHz IF bandwidth will allow reception of full spacecraft deviation, as well as accommodating Doppler shift of about 6 kHz without having to retune during a pass. It also maximizes receiver gain and excludes interfering signals. Figure 4 illustrates the ideal IF pass band which should have as flat a top as possible. It also illustrates what happens when the IF passband is either too wide, or too narrow.

While some people have succeeded in modifying narrow or wideband FM receivers for a 40 kHz IF bandwidth, the best bet is either to buy a suitable receiver, or build your own from a kit. In the past, I have used the Vanguard FMR-250 receiver from

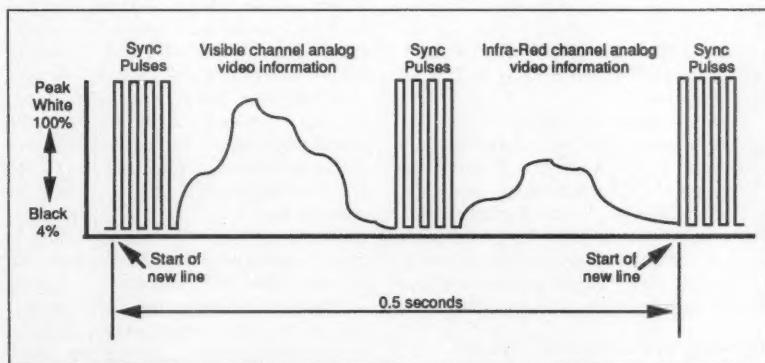


Figure 6. Simplified representation of a single APT scan line from NOAA spacecraft. Sync pulses appear as vertical bars down the picture, and are manually moved to the left-hand or right-hand side of the picture.

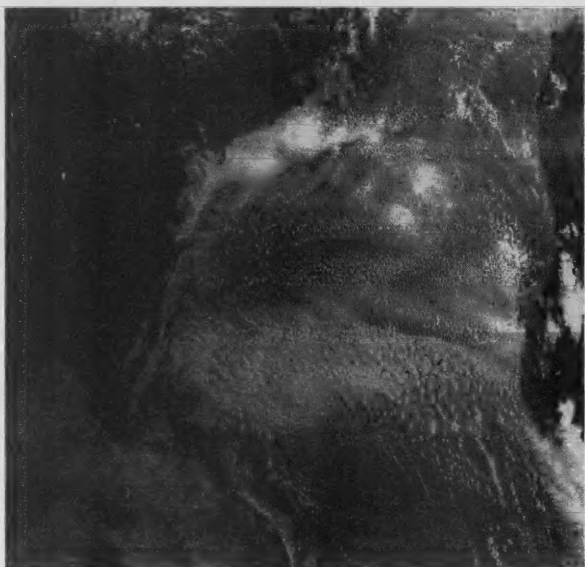


Figure 7. An example of Soviet METEOR imagery.

Vanguard Labs for 137 MHz band reception. This dual-conversion receiver is optimized for weather satellite reception. It is a crystal-controlled unit which I modified for variable frequency use by the addition of a home-built PLL-locked VFO. The results were great. The FMR-250 is now out-of-date, and has been replaced by the WEPIX 2000 synthesised receiver from Vanguard. Hamtronics also makes an excellently priced crystal-controlled 137 MHz weather satellite receiver kit, Model R137, priced at \$129 at the time of writing. [Manufacturer's note: This model has been replaced by the R138, \$99 kit—including built-in channels.] I presently use a home-built receiver, which is available from me either in kit form or built up. See below.

You have the option of either crystal control or a VFO. If you choose crystal control, don't forget to order crystals for 137.3, 137.4, 137.5, 137.62, and 137.85 MHz—this covers most of the polar orbiter frequencies. NOAA satellites transmit on 137.5 and 137.62. The most common Russian METEOR satellite frequencies are on 137.3, 137.4, and 137.85 MHz. Suitable crystals can be ordered from JAN Crystals (see their ad in 73).

For those of you kit builders who do not have a suitable signal source for receiver alignment, Figure 5 shows a circuit for a varicap-tuned FM signal source based on the versatile NE602 chip. (I am preparing a further construction article using this circuit. Special attention has been paid in the article to shielding the RF output to obtain low level VHF signals.)

Decoding Weather Satellite Pictures

All low resolution APT weather satellite pictures have a similar transmission format. An FM carrier is modulated with an ampli-

tude-modulated 2400 Hz subcarrier (tone). When the FM modulation is decoded, the instantaneous amplitude of the 2400 Hz receiver output represents the brightness of the picture cell (pixel) being transmitted. For an APT weather satellite transmission, time for a single scan line is usually 0.5 sec or 0.25 sec; that is, two or four lines per second, giving either 120 lines per minute (NOAA, METEOR), or 240 lines per minute (GOES, Meteosat, and some COSMOS satellites).

At 240 lines per minute, each 0.25 sec line scan represents the full width of the picture. On the 120 LPM NOAA polar orbiters, visible and infrared pictures are transmitted side by side. Thus a single scan line will start with visible picture information, followed by the same picture scanned in infrared. Figure 6 shows a simplified single line of weather satellite transmission from NOAA spacecraft. Note that there are two sets of phasing bars of seven lines each, as two pictures are transmitted side by side. It is these phasing signals, one alternating at 832 Hz and the other at 1040 Hz, that give the NOAA signals their unique "Tick-Tock" sound. The Russian METEOR spacecraft transmit one picture only, with a wide sync pulse train, and have a very different but distinctive screechy sound on the audio transmission channel. In practice, these bars appear as vertical stripes, and have to be moved to one side or the other to display the whole picture.

How many times the picture voltage is sampled per line by the A/D converter will give the number of pixels per line that are available for storage in your display device. The practical maximum for this is about 1024 pixels per line, giving a maximum sampling time per pixel of 0.25/1024, or 240s per pixel on a 240 LPM signal. The A/D converter free-runs at a much faster

conversion rate of about 15s per pixel. This is easy for the software to handle. (See Figure 6.)

Figure 7 shows an example of Soviet METEOR imagery. This early morning S-N pass was received at 0500Z on 15th September, 1993, at my QTH. On the right is the western coast of Madagascar, with Cape St. Andre visible at the extreme top right. Opposite is the African coast of Mozambique, largely buried under cloud, with no features showing inland because the sun is not yet sufficiently high. One interesting aspect of this pass was that the satellite came above the horizon transmitting a black picture with only the sync pulses visible. Suddenly the picture burst into life as the light levels rose and the cameras switched on. The equipment used was the turnstile antenna, no preamp, a home-built 137 MHz receiver using the decoder, an interface and a JVFX 6.0 running on a PC-386. The display was a 17S Trinitron Super VGA color monitor at 800x800 receive resolution. See further down in this article for how the picture was post-processed.

The Decoder

I chose to make a stand-alone decoder so that I could cross-couple inputs and outputs to a variety of receivers and display systems.

The idea is to take the amplitude-modulated 2400 Hz tone from the receiver, pass it through a set of bandpass filters to clean up the 2400 Hz signal, and then full-wave rectify this AC voltage to produce the varying (DC) voltage that represents picture brightness, with white being the highest voltage (5V), and black the lowest voltage (0V). This signal is then converted to parallel digital TTL form in an A/D converter, which presents a new pixel value at the 8-bit output

Continued on page 18



Place
Stamp
Here

**73 Amateur
Radio Today**

PO BOX 7693
RIVERTON NJ 08077-8793



☐ **YES! I want to grow with
73 Amateur Radio Today!**

Mail
this
card
today!

Send me 1 year (12 issues in all) of 73 for the low price
of \$19.97! (I save over \$15.00 off the cover price.)

For instant service dial toll free 800-289-0388.

Name (please print) Call

Address

City State Zip

☐ Payment enclosed ☐ Bill me
Charge my ☐ MC ☐ VISA ☐ AMEX

Card Number Expires

Newstand rate \$35.40. Basic subscription rate \$24.97 (Canadian orders
add \$7.00 per year plus \$1.40 GST; other foreign countries add \$19.00
per year for surface mail, \$42.00 per year for airmail.) Please allow 4-6
weeks for delivery of first issue.

73
Amateur
Radio
Today

B9503BS8-8

FEEDBACK

In our continuing effort to present the best in amateur radio features and columns, we recognize the need to go directly to the source—you, the reader. Articles and columns are assigned feedback numbers, which appear on each article/column and are also listed here. Please rate each feature or column as "Great," "OK," or "No Way." Mail your responses to: 73 Magazine Feedback, 70 Route 202N, Peterborough, New Hampshire 03458.

- 1 Never Say Die
- 2 Letters
- 3 QRX
- 4 Practical Weather Satellite Receiving System, Part 1
- 5 HF-SAT Antenna
- 6 Grounding and Lightning Protection, Part 2
- 7 Review: The Azden PCS-7200
- 8 Review: Ham University Interactive
- 9 Review: LOGic 4
- 10 Review: S & S Engineering's PC-1 Programmable Counter Kit
- 11 Ham Help
- 12 ATV
- 13 Hamsats
- 14 Carr's Corner
- 15 RTTY Loop
- 16 QRP
- 17 Homing In
- 18 Above and Beyond
- 19 Ask Kaboom
- 20 Hams with Class
- 21 Special Events
- 22 New Products
- 23 Barter 'n' Buy
- 24 Propagation

Direct Digital Synthesizer Kits

- DDS-3:** \$149 kit, \$209 assembled.
- 2 Hz to 12 MHz, 2 Hz steps. Sine and TTL.
 - Dip switch or parallel bus controlled.
 - 3"x4" PWB. Requires +/-5 VDC.
 - 5ppm internal crystal oscillator.
- DDS3 PC:** \$249 kit, \$399 assembled.
- 8 bit PC bus version of DDS-3.
 - Sine output to +20dBm into 50 Ω.
 - 0-70 dB step attenuator added.
 - Provision for external clock added.
 - V-Basic and C software w/sources.
- DDS-1C:** \$89 kit only
- 1 Hz to 524 kHz, in 1 Hz steps, sine only.
 - 4"x5" PWB. Requires +/-5 VDC.
 - Dip switch control of discrete DDS.

Call, Write, FAX or e-mail for catalog

Novatech Instruments, Inc.

1530 Eastlake Avenue East, Suite 303
Seattle, WA. 98102
206 328-6902 FAX 206 328-6904
e-mail novatech@eskimo.com

CIRCLE 25 ON READER SERVICE CARD

COAX-SEAL
"The Original Connector Sealant"

The Only Material That Will Adhere to Polyvinyl or Vinyl Outer Coax Jackets!

- Forms around and seals odd-shaped fittings.
- Non-contaminating and non-conductive.
- Wide ambient temperature range (-30° F to +180° F).
- Stays flexible for years insuring moisture-proof connections.
- Reusable—quick disconnection and resealing with same material.
- A must for satellite TV—microwave work.
- Hundreds of uses.
- Moistureproofs all connections.



WRAP

MOLD

COAX-SEAL... This space-age material is simple to apply. Removes air of plastic. Wrap to cover toward fitting. After wrapping, mold to form a smooth surface and force out air.

EFFECTIVE MOISTUREPROOF INEXPENSIVE

EVERY LNB AND COAXIAL CONNECTOR NEEDS COAX-SEAL

Trial packet for 4 connectors—\$1.00 ppd.

UNIVERSAL ELECTRONICS, INC.
4555 Groves Road, Suite 12 Columbus, OH 43232
Phone (614) 866-4605 • FAX (614) 866-1201

CIRCLE 32 ON READER SERVICE CARD

Person-to-Person QSL Cards

Next time you meet a fellow Ham, give him your Person-to-Person business size QSL card.

These premium cards are printed on white Vellum business card stock using raised ink and are of **Top Quality!**










Price 250.....\$21.95
500.....\$27.95
1000.....\$31.95

Custom Cards Add \$3.95
Call for Price for S/H.

CA residents add 8.25% tax.

To order, send check or money order along with (Printed or Typed) Name, Address, Phone, Call Letters, Color of Ink and Card style (listed above).
Mail to: C.W.P.P. 42263 50th St. W., Ste 617 Quartz Hill, CA 93536 + (805) 272-4652

SAM Amateur Radio Callsign Database

Find Hams quickly and easily by Callsign or by Name. Search for a specified City, State, or Zip Code. Print with standard or customized output. Ideal for mailing lists, QSL's etc. **NEW FOR '94**, search filters that allow you to specify **FIRST NAME, LICENSE CLASS, AGE, ADDRESS, or CALL SUFFIX, AREA, OR PREFIX.**

SAM Option files include County Cross Reference, License Expiration Date, Full Date of Birth, Previous Calls and Date First Licensed.

Requires IBM Compatible PC, 17.5 MB of hard drive space, and high-density floppy drive.

NOW AVAILABLE ON CD-ROM

Disk Version \$39.95 CD-ROM \$39.95
SAM OPTIONS \$7.50 each
Shipping and Handling \$5.00

RT SYSTEMS, INC.

8207 STEPHANIE DRIVE, HUNTSVILLE, AL 35802
1-800-723-6922 or 1-205-882-9292
Visa, MasterCard or Discover

SMART AC or SOLAR BATTERY CONTROLLERS

FOR GEL-CELLS OR LEAD-ACID BATTERIES

6 TO 28V, 110/220 VAC, 50/60 HZ. CONT. DUTY—WILL NOT OVERCHARGE. USES UC3006 I.C., HAS HILO CURRENT SWITCH, AUTO LOW VOLTAGE ALARM OUTPUT, REVERSE BATTERY PROTECTION, TRICKLE START-UP. DBLE SIDED PCB, QUICK CONNECT TERMINALS, SELF RESET- TING FUSE, PCB MOUNTED PWR XFMR, & DETAILED MANUAL.

BASIC KIT 6 TO 24V.....\$54.95; 28V.....\$64.95

OPTIONS: TRANSFORMER.....\$18.95

AUTO LOW VOLT DISCONNECT GREAT FOR RV'S.....\$18.00

ALL METAL ENCLOSURE.....\$ CALL

ENCLOSURE WITH CUSTOM METER.....\$ CALL

CURTIS KEYSER KIT

INCLUDES AUDIO AMPLIFIER, IAMBIC KEYING, ADJUSTABLE SPEED CONTROL.....\$39.95; SPEED METER.....\$10.00

POSNEG KEYING, TONE-WEIGHT CONTROL.....\$10.00

ANTENNAS: TWIN LEAD ADDER LINE

MARCONI: 60 M.....\$37.95; 180 M.....\$44.95

J-POLES: (2M, 9M, 220 MHZ).....\$ 8.95 TO.....\$37.95

"WINDOM" WITH 1/4 BALUN & 50' FEED LINE.....\$ 89.95

G5RV MULTIBAND ANTENNA (60 THRU 10M).....\$44.95

FADE PRODUCTS, INC.

PUTTING THE AMATEUR BACK IN RADIO

E. HAMPSHIRE, NH 03828
1-800-JADE PRO
FAX: 603-329-4469
\$5.00 USA SHIPPING CHARGE

HAVING PROBLEMS TAKING TOWERS DOWN??

WE'RE SURE YOU'RE AWARE OF THE BACK BREAKING WORK INVOLVED IN UNCOUPLING TOWER SECTIONS WHICH HAVE STOOD FOR ONLY A FEW YEARS. PEOPLE FIGHTING THESE KINDS OF BATTLES HAVE USED EVERYTHING FROM 2 X 4'S TO SCISSORS JACKS WITH A CERTAIN DEGREE OF SUCCESS AND TOO MUCH WORK, LET ALONE THE ELEVATION ABOVE GROUND WHICH IS TO BE TAKEN INTO CONSIDERATION.

NOW COMES **"TOWER JACK"**, THE GREATEST LITTLE FRIEND YOU'LL EVER NEED WITH YOU ON A TOWER. WHETHER IT BE 15 OR 150 FT. UP, YOU'LL FIND DISMANTLING TOWER SECTIONS A SNAP WITH **"TOWER JACK"**.

Retail \$49.00 Ham Net \$36.00

Send \$36.00 Check or M.O. to:

"TOWER JACK"

P.O. Box 82321

Baton Rouge, LA 70884-2321

(Allow 3 weeks for delivery)

FOR INFORMATION—CALL (504) 924-7708

TOWER ★ JACK

CIRCLE 30 ON READER SERVICE CARD

HamCall CD-ROM

US & International Callsign Lookup
Over 1,130,000 listings and 105 Countries

Includes U.S. Clubs & Military Stations. ICALL DOS & windows program looks up: name, address, expiration date, birth year, license class, county, lat/long, area code, time zone, elevation, beam heading & distance between U.S. stations. Grid Square. Retrieve by any data element on PC, call, name and zip on the MAC.

Hundreds of new shareware programs are on this disc. For a larger collection of software ask about the Electronics Software Compendium CD ROM.

- No hard disk required • Print Labels • Export to hard/disk or floppy • TSR runs from text window • Updated every April & Oct • Standing orders accepted • Dealer discount for 6 or more • Latest public domain PC software. Same low price of \$50.00 plus \$5.00 shipping (U.S. only).

New CD-Rom
Electronics Software Compendium

The Electronics Software Compendium is a collection of shareware programs and data files that pertain to electronics, broadcasting, amateur radio and SWL activity.

Over 15,000 files in total. The disc is updated and issued annually in April. Over 200 megabytes of PC and 30 megabytes of MAC software. Send your order to Buckmaster Publishing, \$25.00 plus \$5.00 shipping (U.S.). Checks accepted.

BUCKMASTER

Route 4, Box 1630 • Mineral, VA 23117
703-894-5777 • 800-282-5628
703-894-9141(Fax)
Internet: info@buck.com

CIRCLE 56 ON READER SERVICE CARD

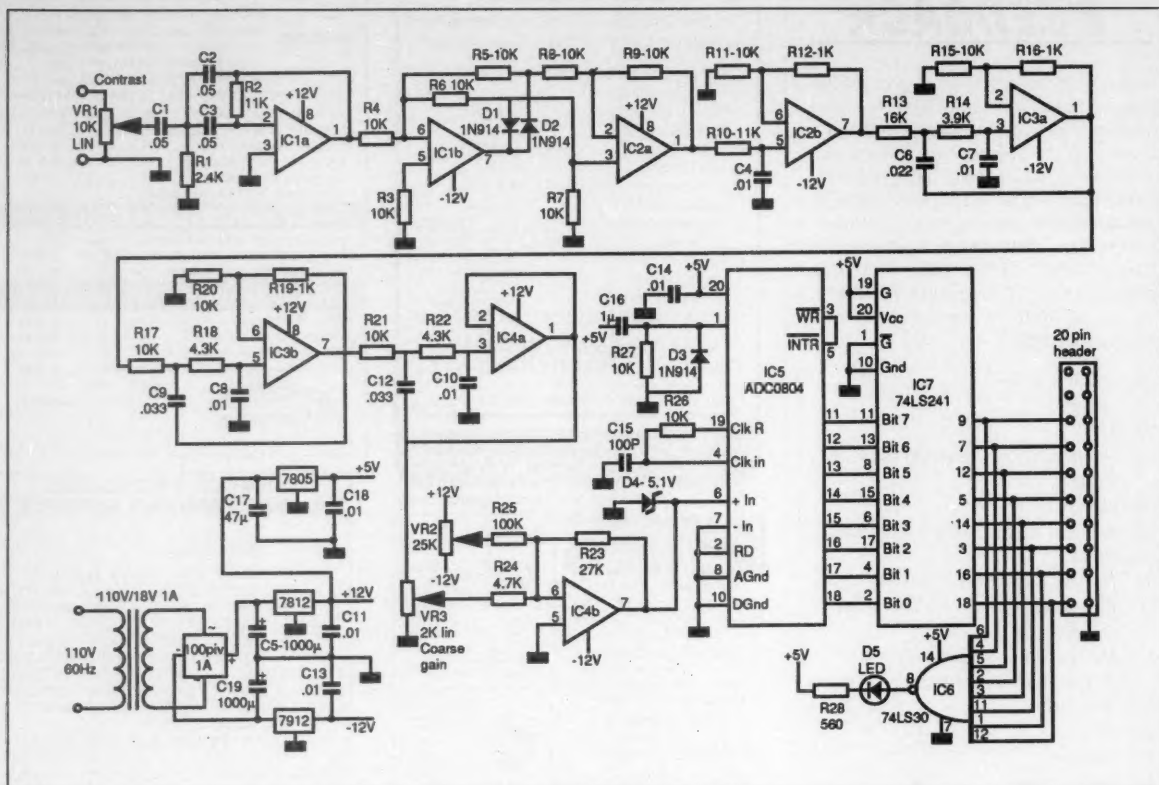


Figure 8. Filter/decoder board schematic.

lines approximately every 205s.

IC1a forms a high-pass filter at 620 Hz, which removes any undesirable 50 Hz and 100 Hz components from the signal, such as 50 or 60 Hz AC hum. IC1b forms an active full-wave rectifier, and is buffered by IC2a. The output of IC2a is fed to IC2b. IC2b, IC3a, IC3b, and IC4a are low-pass filters centered around 1340 Hz. The four 1340 Hz low-pass filter stages form a low-pass filter with an extremely steep high frequency rolloff. This is because it is necessary to remove the twice-2400 Hz (4800 Hz) component of the signal produced by the full-wave rectifier from the analog DC picture voltage. The voltage representing video brightness is then applied to a simple 8-bit analog-to-digital converter IC5, via U4b, where coarse video gain and the offset (black-to-white range) can be controlled by VR2 and VR3. Zener diode ZD1 clips the video at 5.1V max, which prevents possible damage to IC5. The internal conversion oscillator in IC5 is set to free-run at about 500 kHz, which produces a conversion every 205s or so. The output of the D/A is an 8-bit digital word which is placed onto eight parallel output lines through TTL buffer U6 at the A/D conversion rate. IC7 is an 8-bit NAND gate. When all eight parallel output lines from the D/A converter are at logic 1 (representing a video value of 255), the LED will light. This gives an excellent method of judging the

peak white level. The LED should be adjusted so that it just flickers on video peaks. This parallel signal is then fed via ribbon cable to an 8-bit parallel I/O interface connected to the PC bus.

Power at 110V or 220V is supplied by a main transformer giving a secondary output voltage of 18 VAC, which feeds a full-wave rectifier feeding three monolithic regulators to provide +5V, +12V, and -12V. Make sure that you have the correct filter capacitor values. Clean DC and careful audio wiring will prevent 60 Hz hum bars from appearing on your pictures.

This decoder was based on a circuit design by A&A Engineering (see "Finding Out More"), with some changes. I understand that a kit is still available from them. Details below.

Building the Decoder Board

See Figures 8 and 9. The decoder board consists of a single-sided PC board. Note that foil traces are shown in what is known as the X-RAYS view, as if you are looking through the board. View the board from the component side. Insert and solder the wire links first. Then mount the IC sockets, being careful to orient them correctly—the socket notch is in line with pin 1 of the IC. This will aid your orientation during the next step, which is inserting and soldering the resistors. Note that some resistors have to be

paralleled to achieve non-standard values; the Parts List shows which. Insert and solder the filter capacitors, starting at the board area around IC1, and ending at the area around IC4. Then solder the electrolytics, being careful with the orientation of polarity. This is especially true of the tantalum capacitors, whose polarity is difficult to establish at the best of times, especially with my aging eyes! Because the whole performance of your filter system depends on correct resistor and capacitor values, double-check these components before proceeding. Next, insert and solder the 1N914 diodes, the power supply diodes or bridge, and the 5.1V zener diode. Mount the three regulator chips standing up. Current draw is such that they do not need heat-sinking. Then mount the PCB connection pins to the output lines. Mount the pre-set pots, and wire the audio level pot VR1, and the peak video LED. DO NOT install the chips yet.

Do an ohmmeter check of the +12V, -12V, and +5V power rails to establish if there are any shorts. Wire up the power transformer, and set VR1 to min, VR2 to max, and VR3 to mid-range. Power up the board, and check that the correct DC voltages are present at the +12, +5, and -12V pins on all the sockets. Switch off your power.

Insert all chips into their sockets. Switch the power on again. Voltage at the output pins of all the 1458 ICUs (pins 1 or 7)



MODEL VS-50M

ASTRON POWER SUPPLIES

• HEAVY DUTY • HIGH QUALITY • RUGGED • RELIABLE •


SPECIAL FEATURES

- SOLID STATE ELECTRONICALLY REGULATED
- FOLD-BACK CURRENT LIMITING Protects Power Supply from excessive current & continuous shorted output
- CROWBAR OVER VOLTAGE PROTECTION on all Models except RS-3A, RS-4A, RS-5A, RS-4L, RS-5L
- MAINTAIN REGULATION & LOW RIPPLE at low line input Voltage
- HEAVY DUTY HEAT SINK • CHASSIS MOUNT FUSE
- THREE CONDUCTOR POWER CORD except for RS-3A
- ONE YEAR WARRANTY • MADE IN U.S.A.

PERFORMANCE SPECIFICATIONS

- INPUT VOLTAGE: 105-125 VAC
- OUTPUT VOLTAGE: 13.8 VDC \pm 0.05 volts (Internally Adjustable: 11-15 VDC)
- RIPPLE Less than 5mv peak to peak (full load & low line)
- All units available in 220 VAC input voltage (except for SL-11A)

SL SERIES



• LOW PROFILE POWER SUPPLY

MODEL	Colors Gray Black	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
SL-11A	• •	7	11	2 1/2 x 7 1/2 x 9 1/4	12
SL-11R	• •	7	11	2 1/2 x 7 x 9 1/4	12
SL-11S	• •	7	11	2 1/2 x 7 1/2 x 9 1/4	12
SL-11R-RA	• •	7	11	4 x 7 x 9 1/4	13

RS-L SERIES



• POWER SUPPLIES WITH BUILT IN CIGARETTE LIGHTER RECEPTACLE

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
RS-4L	3	4	3 1/2 x 6 1/2 x 7 1/4	6
RS-5L	4	5	3 1/2 x 6 1/2 x 7 1/4	7

RM SERIES



MODEL RM-35M

• 19" RACK MOUNT POWER SUPPLIES

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
RM-12A	9	12	5 1/2 x 19 x 8 1/4	16
RM-35A	25	35	5 1/2 x 19 x 12 1/2	38
RM-50A	37	50	5 1/2 x 19 x 12 1/2	50
RM-60A	50	55	7 x 19 x 12 1/2	60

• Separate Volt and Amp Meters

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
RM-12M	9	12	5 1/2 x 19 x 8 1/4	16
RM-35M	25	35	5 1/2 x 19 x 12 1/2	38
RM-50M	37	50	5 1/2 x 19 x 12 1/2	50
RM-60M	50	55	7 x 19 x 12 1/2	60

RS-A SERIES



MODEL RS-7A

MODEL	Colors Gray Black	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
RS-3A	• •	2.5	3	3 x 4 x 5 1/4	4
RS-4A	• •	3	4	3 1/2 x 6 1/2 x 9	5
RS-5A	• •	4	5	3 1/2 x 6 1/2 x 7 1/4	7
RS-7A	• •	5	7	3 1/2 x 6 1/2 x 9	9
RS-7B	• •	5	7	4 x 7 1/2 x 10 1/4	10
RS-10A	• •	7.5	10	4 x 7 1/2 x 10 1/4	11
RS-12A	• •	9	12	4 1/2 x 8 x 9	13
RS-12B	• •	9	12	4 x 7 1/2 x 10 1/4	13
RS-20A	• •	16	20	5 x 9 x 10 1/2	18
RS-35A	• •	25	35	5 x 11 x 11	27
RS-50A	• •	37	50	6 x 13 1/4 x 11	46
RS-70A	• •	57	70	6 x 13 1/4 x 12 1/2	48

RS-M SERIES



MODEL RS-35M

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
• Switchable volt and Amp meter RS-12M	9	12	4 1/2 x 8 x 9	13
• Separate volt and Amp meters RS-20M	16	20	5 x 9 x 10 1/2	18
RS-35M	25	35	5 x 11 x 11	27
RS-50M	37	50	6 x 13 1/4 x 11	46
RS-70M	57	70	6 x 13 1/4 x 12 1/2	48

VS-M AND VRM-M SERIES



MODEL VS-35M

- Separate Volt and Amp Meters • Output Voltage adjustable from 2-15 volts • Current limit adjustable from 1.5 amps to Full Load

MODEL	Continuous Duty (Amps) @13.8VDC @10VDC @5VDC	ICS* (Amps) @13.8V	Size (IN) H x W x D	Shipping Wt. (lbs.)
VS-12M	9 5 2	12	4 1/2 x 8 x 9	13
VS-20M	16 9 4	20	5 x 9 x 10 1/2	20
VS-35M	25 15 7	35	5 x 11 x 11	29
VS-50M	37 22 10	50	6 x 13 1/4 x 11	46

• Variable rack mount power supplies

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
VRM-35M	25	35	5 1/2 x 19 x 12 1/2	38
VRM-50M	37	50	5 1/2 x 19 x 12 1/2	50

RS-S SERIES



MODEL RS-12S

• Built in speaker

MODEL	Colors Gray Black	Continuous Duty (Amps)	ICS* Amps	Size (IN) H x W x D	Shipping Wt. (lbs.)
RS-7S	• •	5	7	4 x 7 1/2 x 10 1/4	10
RS-10S	• •	7.5	10	4 x 7 1/2 x 10 1/4	12
RS-12S	• •	9	12	4 1/2 x 8 x 9	13
RS-20S	• •	16	20	5 x 9 x 10 1/2	18
SL-11S	• •	7	11	2 1/2 x 7 1/2 x 9 1/4	12

ORDER NOW 1-800 4 HOBBY KITS

AIRCRAFT RECEIVER



Hear exciting air-craft communications—pick up planes up to 100 miles away! Receives 110-136

MHz AM air band, smooth varactor tuning superhet with AGC, ceramic filter, adjustable squelch, excellent sensitivity and lots of speaker volume. Runs on 9V battery. Great for air shows or just hanging around the airport! New 30-page manual details pilot talk, too. Add case set for "pro" look.

AR-1 kit.....\$29.95 Matching case set, CAR.....\$14.95

FM RECEIVERS & TRANSMITTER

Keep an ear on the local repeater, police, weather or just tune around. These sensitive superhet receivers are fun to build and use. Tunes any 5 MHz portion of the band and have smooth varactor tuning with AFC, dual conversion, ceramic filtering, squelch and plenty of speaker volume. Complete manual details how the rigs work and applications. 2M FM transmitter has SW RF out, crystal control (146.52 included), pro-specs and data/mike inputs. Add our case sets for a nice finish.

FM Receiver kit Specify band: FR-146 (2M), FR-6 (6M), FR-10 (10M), FR-220 (220MHz).....\$34.95
CFR Matching case set.....\$14.95
FT-146 Two Meter FM transmitter kit.....\$99.95

MICRO-MIKE

World's smallest FM wireless mike. Smaller than a sugar cube - including battery and mike. Two sets of SMT parts supplied in case you are clumsy! Terrific audio pick-up (pin drop at 5 ft) and transmit range of 300 ft. We include the battery (watch style), electret mike and even a tuning tool! Be a James Bond and learn SMT too! FM-Micro Mike kit.....\$19.95



FM WIRELESS MIKES

Pick the unit that's right for you. All units transmit a stable signal in the 88-108 MHz FM band up to 300' except for High power FM-4 and PB-1 Phone bug that go up to 1/2 mile.

FM-1 Basic unit.....\$5.95
FM-2, as above.....\$7.95
but with added mike pre amp.....\$14.95
FM-4, long range with very sensitive audio pickup.....\$14.95
PB-1, Phone bug needs no battery, hooks to phone line.....\$14.95
MC-1, Micro size sensitive mike cartridge for FM-1,2,4.....\$2.95

SURROUND-SOUND/REVERB

Add concert hall realism to your stereo, TV or even 2-way radio! Easily synthesize a stereo effect from mono sources or richly enrich regular music. Add a big-voice reverb to your radio voice that others will envy! Our reverb/surround sound kit uses a Bucket Brigade IC device for reliable solid-state performance. Adjustable reverb, delay and mix controls to customize your sound. Easily connected to radios, stereos, CB's and TVs. Plenty of audio to drive a small speaker for stand-alone operation too. Experience the fun and realism that surround sound provides - without spending hundreds! Add our case set for a neat, pro look.

RV-1 Surround Sound/Reverb kit.....\$59.95 CRV Matching case set.....\$14.95
RV-1WT Assembled RV-1 and case.....\$89.95

TOUCH-TONE REMOTE CONTROL

Control virtually anything by Touch-Tone remote control. The URC-1 has 16 switched outputs, 4 adjustable voltage outputs (20 mV steps 0 to 5 VDC), two 10K digital pots (for volume, squelch, etc.) and 3 timers adjustable from 10 ms to 40 hours! Two level password control allows secure control and multi-level access. Six digit LED display shows currently entered codes and a crystal controlled touch-tone decoder provides reliable operation. There's nothing else like this unit, be in complete control of remote radios, thermostats, hi-fis, homes or even factories with the URC-1. Add our matching case set for a handsome finish.

URC-1 Remote control kit.....\$129.95 CURC Matching case set.....\$14.95
URC-1WT Fully assembled URC-1 and case.....\$189.95

FM SUBCARRIER DECODER

Tap into the world of commercial-free music and data that is carried over many standard FM broadcast radio stations. Decoder hooks to the demodulator of FM radio and tunes the 50-100 kHz SCA subcarrier band. Many radios have a demod output, but if your radio doesn't, it's easy to locate, or use our FR-1 FM receiver kit which is a complete FM radio with a demod jack built-in. These "hidden" subcarriers carry lots of neat programming - from stock quotes to news to music, from rock to easy listening - all commercial free. Hear what you've been missing with the SCA-1.

SCA-1 Decoder kit.....\$27.95 CSCA Matching case set.....\$14.95
FR-1 FM receiver kit.....\$24.95 CFR Matching case set for FR-1.....\$14.95

L-C METER

Measure inductors from 10 uH-10mH and capacitors from 2 pF-2uF with high accuracy by connecting the LC-1 to any digital multimeter. Two pushbutton ranges for high resolution readings and we even give you calibration components to assure proper accuracy of your kit! Active filters and switching supplies require critical values, no one should be without an accurate LC meter. For a pro look, add our matching case set.

LC-1 LC meter kit.....\$34.95 CLC case set.....\$14.95


MOTOR CONTROLLER

Control the speed and direction of any motor. Use our SMD-1 for those nice steppers you see surpluses, and our MSC-1 for DC motors. The stepper driver features variable speed, half step rotation, direction and power down mode, can drive most any stepper motor. Our DC driver features pulse width modulation control allowing full motor torque even at low speeds and can drive motors up to 50 VDC @ 10 Amps! Add our case set for a professional assembly.

SMD-1 Stepper kit.....\$24.95 MSC-1 DC motor kit.....\$24.95
CSMD SMD-1 case.....\$14.95 CMSC MSC-1 case.....\$14.95



SYNTHESIZED AUDIO GENERATOR



DDS (Direct Digital Synthesis) technology brings you a terrific audio generator at a fantastic price! Generates from 0.01 Hz to 50 KHz with five digit LED display of frequency. Sine and square wave output adjustable 0-5

volt p-p. Frequency selected by direct keyboard entry and with handy continuous tune tuning knob. Crystal controlled accuracy of 10 ppm and two memories for rapid frequency changes. Retire that jury-rigged old generator and treat yourself to the pleasure of using a new state-of-the-art SG-550!

SG-550 Kit.....\$199.95 SG-550WT assembled.....\$269.95

SHORTWAVE RECEIVER

Fantastic receiver that captures the world with just a 12" antenna! Can receive any 2 MHz portion from 4-11 MHz. True superhet, has smooth varactor tuning. AGC, RF gain control, plenty of speaker volume and runs on a 9V battery. Fascinating Scout, school or club project, provides hours of fun for even the most serious DXer. For the car, consider our shortwave converter. Two switchable bands (in 3-22 MHz range), each 1 MHz wide—tunable on your car radio dial. Add some interest to your drive home! Shortwave receiver kit, SR1.....\$29.95
Shortwave converter kit, SC1.....\$27.95
Matching case set for SR1, CSR.....\$14.95
Matching case set for SC1, CSC.....\$14.95



AM TRANSMITTER

High quality, true AM broadcast band transmitter is designed exactly like the big commercial rigs. Power of 100 mW, legal range of up to 1/4 mile. Accepts line level inputs from tape and CD players and mike mixers, tuneable 550-1750 KHz. Complete manual explains circuitry, help with FCC regs and even antenna ideas. Be your own Rush Limbaugh or Rick Dees with the AM-1! Add our case set for a true station look.

AM-1 Transmitter kit.....\$29.95

CAM Matching case set.....\$14.95

SCANNER CONVERTER

Tune in on the 800-950 MHz action using your existing scanner. Frequencies are converted with crystal referenced stability to the 400-550 MHz range. Instructions are even included on building high performance 900 MHz antennas. Well designed circuit features extensive filtering and convenient on-off/bypass switch. Easy one hour assembly or available fully assembled. Add our matching case set for a professional look.

SCN-1 Scanner converter kit.....\$49.95

SCN Matching case set.....\$14.95

SCN-1WT Assembled SCN-1 and case.....\$89.95



STEREO FM TRANSMITTER

Run your own Stereo FM radio station! Transmits a stable signal in the 88-108 MHz FM broadcast band up to 1 mile. Detailed manual provides helpful info on FCC regs, antenna ideas and range to expect. Latest design features adjustable line level inputs, pre-emphasis and crystal controlled subcarrier. Connects to any CD or tape player, mike mixer or radio. Includes free tuning tool too! For a pro look add our matching case set with on-board whip antenna.

FM-10A Stereo transmitter kit.....\$34.95

CFM Case, whip ant set.....\$14.95



DR. NI-CAD CONDITIONER/FAST CHARGER

Quit spending big bucks for replacement battery packs, rejuvenate and condition your batteries for peak capacity. Advanced circuitry has optimized discharge before charge to eliminate memory effect and to condition batteries that have been poorly cared for in the past. Quick charge rapidly brings battery to full charge in less than an hour—just 15 minutes for some types! And "top-off" charge mode squeezes every last bit of energy into each cell for the absolute most capacity. Switch-mode regulator controls constant current charge while being monitored by a negative delta-V system that cuts off the fast charge at the exact point of full charge—batteries are charged, not cooked! Charges NiCads or NiMH packs from 2 to 10 cells (easily expanded) and current capacities up to 10 Amp-hours. Runs on 12 to 15 VDC. Quit cooking your batteries, buying new packs, waiting hours for recharge, get a Dr. Ni-Cad today! Available in money saving kit form or wired and tested with case at a special price. Kit builders: add our matching case set for a snazzy finish.

DN-1 Dr. Ni-Cad conditioner/fast charger kit.....\$49.95

CDN Matching case set.....\$14.95

DN-1WT Fully assembled Dr. Ni-Cad with case.....\$69.95

SPEED RADAR

New low-cost microwave Doppler radar kit "locks" cars, planes, boats, horses, bikes or any large moving object. Operates at 2.6 GHz with up to 1/4 mile range. LED digital readout displays speed in miles per hour, kilometers per hour or feet per second! Earphone output allows for listening to actual Doppler shift. Uses two 1-lb coffee cans for antenna (not included) and runs on 12 VDC. Easy to build—all microwave circuitry is PC stripline. ABS plastic case with speedy graphics for a professional look. A very useful and full-of-fun kit.

SG-7 Complete kit.....\$99.95



STEREO PEAK HOLD BARGRAPH

Finally a dual LED bar graph with a peak hold display! Bar graph displays are neat and eye catching but their speed is their downfall - they just can't capture the peaks. Our kit is like two units in one, a fast display to show the signal and a long persistence display to capture peaks, similar units go for hundreds of bucks! We offer 3 models: Linear for general use, Semi-Log for audio VU meters, and Log for power displays. Dual - for stereo! - 10 segment multi-colored LED display for snazzy, eye grabbing display and easily set ranges for virtually any signals, from voltmeters to audio VU meters to audio power amps to SWR meters. Complete instructions for easy hook-up to most any device. Add our matching case set for a sharp looking unit.

PH-14 Dual Linear bargraph kit.....\$39.95

PH-15 Dual Log bargraph kit.....\$39.95

PH-16 Dual Semi-Log bargraph kit.....\$39.95

CPH Matching case set.....\$14.95

SPEECH SCRAMBLER

Descramble most scramble systems heard on your scanner radio or set up your own scrambled communication system over the phone or radio. Latest 3rd generation IC is used for fantastic audio quality - equivalent to over 30 op-amps and mixers! Crystal controlled for crystal clear sound with a built-in 2 watt audio amp for direct radio hook-up. For scramble systems, each user has a unit for full duplex operation. Communicate in privacy with the SS-70. Add our case set for a fine professional finish.

SS-70 Scrambler/descrambler kit.....\$39.95

CSSD matching case set.....\$14.95

SS-70WT Assembled.....\$79.95

SS-70 and case set.....\$79.95

CRYSTAL RADIO

Relive the radio past with a crystal set like your grandfather built. Uses genuine Galena crystal and catwhisker. Several different types of radios are built, including standard AM broadcast, shortwave and even WW II foxhole style. To compare modern semiconductor detectors, we include a diode for comparison. No soldering required and we even give antenna ideas. Radio for free, get it now before Clinton taxes it!

CS-1 Crystal set kit.....\$19.95

TOUCH-TONE DECODER

Grab Touch-Tone numbers right off the air, phone or tape. A simple hook-up to any radio speaker or phone line is all that is required to instantly decipher touch-tone phone numbers or codes. A 256 digit memory stores decoded numbers and keeps its memory even in the event of power loss. An 8 digit LED display allows you to scroll through the memory bank to examine numbers. To make it easy to pick out number groups or codes, a "dash" is inserted between sets of digits that were decoded more than 2 seconds apart. A "central-office" quality crystal controlled decoder is used allowing rapid and reliable detection of numbers at up to 20 digits per second! For a professionally finished look, add our matching case set. Start cracking those secret codes tomorrow with the Tone Grabber!

TG-1 Tone Grabber kit.....\$99.95 CTG Matching case set.....\$14.95

TG-1WT Fully assembled TG-1 and case.....\$149.95

DIGITAL VOICE RECORDER

Chatterbox digital voice storage unit will record your message of up to 20 seconds. Time is split up into four 5 second blocks which can be played separately or cascaded for longer messages. An LED display shows message location and current mode for easy operation. Nifty built-in interfaces allow simple connection to transmitters for automatic keying when the PTT is initially closed or after it is released. You can even loop your rig's mike through the Chatterbox. For contest or fun use, the CB-1 can drive an external speaker. Includes a built-in electret mike. For that finishing touch, add our matching case set.

CB-1 Voice recorder kit.....\$59.95 CCB Matching case set.....\$14.95

ORDERS CALL 1-800-4 HOBBY KITS (446-2295) ORDERS ONLY
TECH/ORDER/INFO (716)924-4560 FAX (716)924-4555



TERMS: Satisfaction guaranteed. Examine for 10 days. If not pleased return in original form for refund. Add \$4.95 for shipping, handling and insurance. For foreign orders add 20% for surface mail. COD (U.S. only) add \$5.00. Orders under \$20 add \$3.00 NY residents add 7% sales tax. 90-day parts warranty on kit parts. 1-year parts & labor warranty on wired units.

RAMSEY ELECTRONICS, INC 793 CANNING PARKWAY VICTOR NY 14564

CIRCLE 34 ON READER SERVICE CARD

where toward the end of VR1Us travel, the LED should flicker. If this happens, you have a working system, and all that remains is adjustment. If it does not, use an oscilloscope to check the outputs of IC2, IC3, and IC4. These should vary in DC voltage when you vary VR1. If you get variation at pin 6 of IC5, your filter system (ICUs 1 to 4) is most likely working. Check with a scope that IC5 is oscillating at about 500 kHz (pins 4 and 19 of IC 5). If you still do not get an LED indication, check that the max DC voltage at pin 6 of IC5 is close to 5V with VR1 near max. Adjust VR1, VR2 (offset) and VR3 (coarse gain) to achieve this. I have come across some ADC0804Us that latch up on power on; this could be your problem. Set VR1 so that the DC voltage at pin 6 of IC5 is 5V, and then switch the power on and off a couple of times. If the LED comes on, check that it goes off when you decrease VR1, and comes on again when you increase VR1. If this is the case, you have nothing wrong except a latching A/D converter. I choose to live with this problem. Sometimes I switch power on and off a couple of times when starting up until I get a flickering satellite signal LED, then all is well! Remember to have a 2400 Hz peak level signal present at the input when switching on. If you still do not get a signal, check with a scope that there are TTL signals at the output pins of IC5, and also at the output pins of IC7. You should finally adjust VR1, VR2, and VR3 to get about 0.3V for black level, and about 5V for white level on a live satellite signal at the input of the A/D converter. A scope is useful here.

One final point on the decoder: Although I have not tried it, the decoder PCB is small enough so that it can piggyback on the parallel interface board inside the PC, using standoffs. You will then save all the power supply components needed for a stand-alone decoder because you will be able to use the PC power supply voltages to power the decoder. You will, however, need to lead the LED indicator out to the front panel, and the input level control can also be remotely mounted. If you are going to use this option, remember to mount the offset and gain set preset pots at right angles to the PCB, so that they face upward and are adjustable when the boards are mounted in a PC slot.

Connecting the Decoder to your Receiver

You should connect the decoder directly off a tap led from the top of the volume control in your receiver. If you do not have enough gain from your receiver audio, Figure 10 gives the circuit for a simple audio amplifier stage, which may be simply built using perf board. Put this between VR1 and the decoder.

Summary

At this point, we have created the receiving path which starts with a satellite signal, and ends with the 8-bit parallel TTL A/D signal suitable for feeding to a PC based display system. Next month we will cover

Parts List

R1	2.4kΩ (2.2kΩ & 220Ω in series)
R2,R10	11kΩ (10kΩ & 1kΩ in series)
R3,R4,R5,R6,R7,R8,R9	10kΩ
R11,R15,R17,R20,R21,R26,R27	10kΩ
R12,R16,R19	1kΩ
R13	16kΩ (15kΩ & 1kΩ in series)
R14	3.9kΩ
R18,R22	4.3kΩ (3.9kΩ & 390Ω in series)
R23	27kΩ
R24	4.7kΩ
R25	100kΩ
R28	560Ω
VR1	10kΩ log (contrast)
VR2	25kΩ lin preset (A/D level)
VR3	2kΩ lin preset (coarse gain)
C1,C2,C3	0.05 μF
C4,C7,C8,C10,C11,C13,C14,C18	0.01 μF
C5,C19	1,000 μF 25V electrolytic
C6	0.022 μF
C9,C12	0.033 μF
C15	100 pF
C16	1 μF tant.
C17	47 μF 16V tant.
D1,D2,D3	1N914
D4	5.1V zener, 400 mW
IC1,IC2,IC3,IC4	MC1458 or LF353
IC5	ADC0804
IC6	7430
IC7	74LS241

All resistors are 1/4 watt, 5% tolerance or better.

Tantalums are miniature bead type.

Other non-electrolytic caps are disc ceramic type, 16V or higher. Try to purchase or select these capacitors to 5% tolerance.

Decoder Power Supply

100 PIV 1 amp diode bridge
110V/18V 1 amp mains transformer
7812 monolithic +12V regulator, TO-220
7912 monolithic -12V regulator, TO-220
7805 monolithic +5V regulator, TO-220

Note: For safety, insert a lamp fuse and suitable holder in the live leg of the mains supply.

Miscellaneous

4 x 8 pin DTL sockets
2 x 20 pin DTL sockets
1 x 14 pin DTL socket
Red LED & panel mounting plastic collar
PCB Vero solder pins x 9
Stranded insulated hookup wire
Tinned copper wire
PC board

the PC I/O interface card, and the installation and use of JVFAX 6.0 display software.

Finding Out More

The *Weather Satellite Handbook*, written by Ralph Taggart WB8DQT, is available from the Uncle Wayne's Bookshelf. This contains almost everything that you might ever want to know about setting up a weather satellite station. Another good source of knowledge is the Dallas Remote Imaging Group (DRIG) bulletin board at (214) 394-7438.

A full kit of parts for the decoder with power supply (excluding cabinet) can be obtained for \$55, or fully-built and tested for \$95, from the author. Air postage to US, Canada, and Europe paid; other destinations on request. (Angus Anderson, P.O. Box 41544, Craighall, 2024, South Africa; Tel.:

Business hours, country code 27, city code 11, 468-1106; Fax: country code 27, city code 11, 468-1034; CompuServe: 70262,1702. I accept Visa, MasterCard, cash, or money orders. No cheques please. South Africa is nine hours behind PDT, six hours behind EDT, and two hours behind GMT.)

A high performance weather satellite receiver kit with PLL-locked VFO tuning 136 MHz to 138 MHz (excluding cabinet, P/S, and tuning mechanism) can be ordered for \$185.

The decoder board can also be obtained from A&A Engineering, 2521 West La Palma #K, Anaheim, CA 92801. Tel 714-952-2114. Prices on request.

A PLL-controlled VFO kit only for a 10.7 MHz Rx IF can be ordered for \$95 from the author. This contains all parts, crystals, and the PCB, but no cabinet.

WE SHIP WORLDWIDE

Barry Electronics Corp.

WORLD WIDE AMATEUR RADIO SINCE 1950
Your one source for all Radio Equipment!

For the best buys in town call:
212-925-7000
Los Precios Mas Bajos en Nueva York
WE SHIP WORLDWIDE!
Export orders expedited.



Wherever I go, I take my radio.
Specialist in RADIOS;
Business marine aviation,
ham radios and scanners.

KENWOOD



ANTENNAS
A-S, AES, Cushcraft, Hy-Gain,
Hustler, KLM, METZ, Urban,
MODUBLOX, TONNA, Butternut,
Multi-Band

"TS-50S", TS450S/AT, R-5000, TS-850S,
TM 241/A441A, TR-751A, Kenwood Service
Repair, TS140S, TS690S, RZ-1, TS-790A,
TS950SD, TH-78A, TH28/48A, TM-941A,
TM-741A, TM-732A, TM-641A, TM-742A.

MARINE RADIOS
ICOM M7, M11, M56, M700TY, M800
AVIATION PORTABLE ICOM A-21
MOTOROLA MARINE KING KX 99

KITTY SAYS: WE ARE OPEN 7 DAYS A WEEK
Sat. 10-5 Sun 11-4 M-F 9-6 Come to Barry's for the best buys in town



MOTOROLA

SP10, SP50, P110, GP3000, M120,
GM300, GR300 repeaters.


Domestic, exports and gov't. orders.



CONTACT US FOR THE LATEST IN
BUSINESS AND HAM RADIOS,
SHORTWAVE RECEIVERS & SCANNERS,
MOTOROLA, YAESU, ICOM, KENWOOD,
ALINCO, STANDARD, MAXON, RELM,
BENDIS, KING, SONY, SANGEAN,
GRUNDIG

"YAESU Ham & Vertex Business Radios"

FT-890, FRG-100B, FT-1000D, FT-530, FT-5200, FT-530-FT411E,
FT-840, FT-900AT, FRG-100B, FT-2400, FT-23R, FL-7000 Linear.
New VXR-5000 synthesized repeater 25 watts, VHF or UHF.



281-H, 481-H, 2340-H,
2700-H, IC-D100, GP-22A
ICOM Business Radios
New F30LT/F40LT, H16, U16,
V100, and repeaters

Telephone Autopatch

Patches telephone calls from
your radio to phone line. Great
for making and receiving
phone calls where there are
no phone lines. Simple to use.
Write or fax for inquiries.

TCS- Ultralite

Ultimate, transportable telephone
communication terminal. Make
and receive phone calls, fax, telex
anywhere in the world where
there are no phone lines. Small,
compact with 1.2 meter dish. Fits
in suitcase. Mil. Std. 810 specs.
Write or call.

Save money on batteries.
Ask for Special Prices.

Barry's supplies all
MFJ products
Call us direct.

Covercraft Coaxial Stocked
**SHORTWAVE RECEIVERS
STOCKED**

Radios for Business,
Government.
Stocked & Serviced
Call for Great Prices!

Shortwave Radios

JRC, ICOM,
KENWOOD, YAESU,
SONY and GRUNDIG

Hy-Gain Towers
will be shipped
direct to you
FREE of
shipping cost.

**Amplifiers, HF/VHF/UHF
AMERITRON, etc.**

Surveillance Devices Available

Linear Amplifier
Ameritron, Icom, Kenwood, Yaesu

W2IAT
2GXAT

IC-H16/U16
IC21A

**MOTOROLA RADIOS
COMMERCIAL RADIOS**

TH-79A
Kenwood

FT-530
Yaesu

Shortwave Receivers

• SONY • GRUNDIG
• SANGEAN • ICOM

Call 212-925-7000
Satellite telephone in suitcase for
worldwide use. CALL

CB Radios Stocked

148 GT2, Warrington, Ranger 2950-70,
Wilson 1000, 10/11 Meter Antennas,
Antron, Shakespeare, etc.,
Astatic power mics,
Silver Eagle w/bep, etc.

Computer Interfaces

Stocked: MFJ-1270B,
MFJ-1274, MFJ-1224, AEA
PK-88, MFJ-1278T, PK-900,
PK-232 MBX W/FAX, DRSI
PRODUCTS DSP 2232

Antenna Tuners:

MFJ, AEA AT-300,
ICOM, KENWOOD,
YAESU, VERTEX

**COMMERCIAL & HAM
REPEATERS
STOCKED.
WRITE FOR
QUOTES**

Kantronics
KAM PLUS, KPC 2/3/4,
KPC2400, SUPER FAX II,
KPC IV, Data Engine, D4-
10, etc.

**MOTOROLA AUTHORIZED DEALER
KACHINA COMMUNICATIONS DEALER**

**AUTHORIZED
DEALER**

SONY

Shortwave Radios Stocked
DIGITAL FREQUENCY COUNTERS
OPTOELECTRONICS model 1300 H/A, 0-1300MHz
2300, 2210 H, 0-2200 MHz, 2600H, UTC-3000, 2810

Long-range Wireless
telephone for overseas. CALL

**BENCHER PADDLES
BALUNS, LOW PASS FILTERS
IN STOCK**

MIRAGE/RFC Amplifiers
ASTRON POWER SUPPLIES
Belden Wire & Cable, Int'l Wire
OPTOELECTRONICS STOCKED

Wide selection of SW &
Amateur Publications

**BIRD Wattmeters &
Elements in Stock**



EIMAC
3-500Z
572B, 6JS6C
12BY7A &
6146B
BIRD
Wattmeters &
Elements
In Stock



ANTENNAS:
AEA AlphaDelta,
ANLI, Antenna
Specialist, Barker &
Williamson,
Comet, Cushcraft,
Diamond, GAP,
Hy-Gain, Hustler,
Larsen, etc.

(144, 220, 440
MHz), Isolooop.

**Privacy scramblers
for radios and
phones. CALL**

ALINCO DJ-580T, DJ-582T,
DJ-FIT, DJ-F1TH, DR-130/430T,
DJ-180T/TH

BARRY ELECTRONICS CORP., 540 BROADWAY, NY, NY 10012 (Five blocks N. of Canal St., between Spring & Prince St.) FAX 212-925-7001 Phone 212-925-7000

New York City's

LARGEST STOCKING TWO WAY RADIO DEALER
COMPLETE REPAIR LAB ON PREMISES

"Aqui Se Habla Espanol"

BARRY INTERNATIONAL
FAX 212-925-7001 Phone 212-925-7000
For Orders Call 1-800-990-2929

Monday-Friday 9 A.M. to 6:00 P.M.
Saturday 10-5pm / Sunday 11-2pm

Subways: #6 Spring St. stop, N. train to Prince St.,
F train to Houston St.
Bus: Broadway bus to Prince St., Path 9th St./6th Ave.

**COMMERCIAL RADIOS
STOCKED:** ICOM, Motor-
ola, MAXON, Standard,
Yaesu. We serve munic-
ipalities, businesses, Civil
Defense, etc. Portables,
mobiles, bases, re-
peaters...

**ALL
SALES
FINAL**

We stock: AEA, Alinco, Ameco, Ameritron, Antenna Specialist, ARRL,
Astatic, Astron, B&K, Belden, Benchner, Bird, Bitternut, CES, Cushcraft,
Condan, Daiwa, Elmac, Henry Heil, Hustler, Hy-Gain, Icom, KLM,
Kantronics, Kenwood, Larsen, Maxon, MFJ, Mirage, Motorola, Nye,
Palomar, RF Products, Shure, Standard, TUBES & Tube Cartons Uniden,
Yaesu, Vibroflex, Duplexers, Repeaters, Scanners Radio Publications.

WE NOW STOCK COMMERCIAL COMMUNICATIONS SYSTEMS
HAM DEALER INQUIRES INVITED PHONE IN YOUR ORDER & BE REIMBURSED
COMMERCIAL RADIOS stocked & serviced on premises.
Amateur Radio Courses Given On Our Premises, Call
Export Orders Shipped Immediately.

Technical help offered upon purchase

FAX: 212-925-7001

HF-SAT Antenna

An easy-to-build dual-band HF satellite antenna.

by Edward Oros AC3L

Here is an antenna for the nineties. It's strong, computer designed, and has lots of gain.

This is a no compromise dual-band antenna. Instead of using traps, this design interlaces two separate antennas (the 10 meter band and the 15 meter band) on one boom. This is a full-size, four-element beam on 10, and three elements on 15 meters!

The design uses large 1"-diameter aluminum tubing to keep ohmic losses to a minimum, to survive heavy winds and withstand ice build-ups in the winter.

Since it is both a 10 and 15 meter antenna, it is the perfect antenna for anyone interested in working the RS satellites which have uplinks on 15 and downlinks on the 10 meter band.

The HF-SAT produces plenty of gain on both bands. The antenna was computer optimized for maximum forward gain (hence the low front-to-back). The 10 meter band has close to 9 dBd gain (free space), and the 15 meter band produces over 7 dBd (also free space). (See the sidebar.)

Construction

Since all elements are of 1" tubing, it's just a matter of laying out each element end-to-end and cutting the last piece to the required length for that element. Each 1" section is joined to the next piece via a third piece of aluminum (0.875" diameter) which



Photo A. The finished HF-SAT Antenna in service. (Photo by N3LSS.)

slides into the 1" sections (see Figure 1). Drill holes on either side of the joint and use bolts to secure each section in place. The elements are attached to the boom by muffler clamps.

Feeding

Current baluns should be used at each feed point. They can be commercial models, or just loop several turns of the cable to create your own balun. Separate cables are run to each feed point and then run to a mast-mounted switch box or straight into the shack. You can choose your own favorite

matching method but in this case a gamma match was used at each feed point, and this worked well. If the antenna is mounted at 40 feet, the 10 meter antenna should have an impedance near 13 ohms.

The 15 meter antenna is around 27 ohms. If you'd like, you could just use a two-to-one (2:1, 50-25 ohms) balun to match the 15 meter antenna, and skip the gamma match here. Figure 2 and Table 1 show all of the necessary measurements for the beam.

Test Out

The initial tests of this antenna were per-

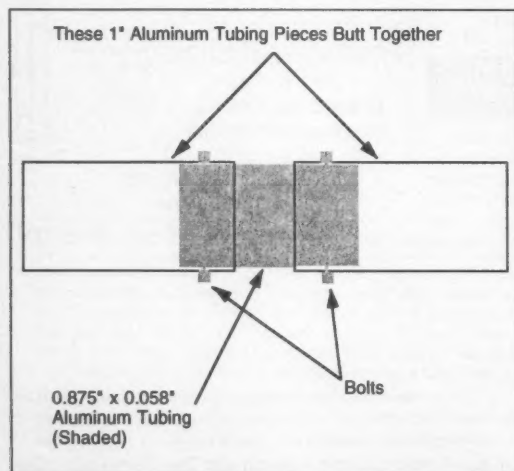


Figure 1. Construction detail for joining the 1" tubing sections.

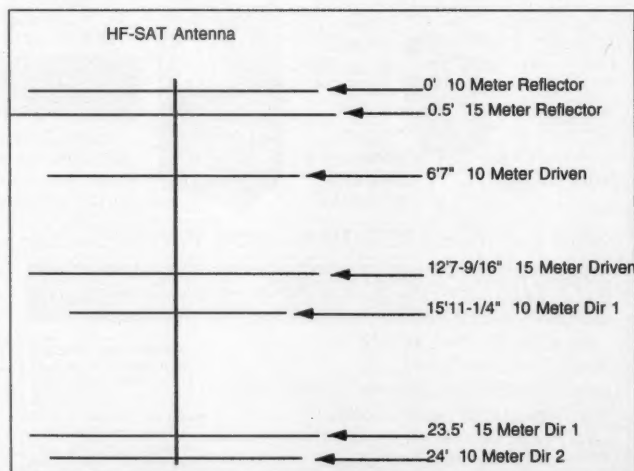


Figure 2. Construction measurements for the HF-SAT Antenna. Dimensions shown indicate element positions on the boom.

Gain Figures for the HF-SAT Antenna

10 Meter Band	
Free Space	Above Ground (40')
	Max Gain @ 12 Deg
Gain 8.92 dBd	13.82 dBd
F/B 12.47 dB	12.08 dB
Imped. 13.1 + j 2.1	12.8 + j 1.4


15 Meter Band	
Free Space	Above Ground (40')
	Max Gain @ 15 Deg
7.36 dBd	12.22 dBd
7.13 dBd	6.86 dBd
27.40 + j 1.5	27.00 + j 1.3

formed while on a 10-foot pole. The comparison antenna was a three-element, 10 meter monobander created using standard beam formulas and was not computer designed.

Local tests showed that the HFSAT antenna was already slightly better signal-wise than the 40-foot-high three-element beam. Once the HF-SAT antenna was taken up to the 40-

Table 1. Element Lengths


Reflector	16' 10-13/16"	22' 2-1/4"
Driven	15' 10-9/16"	21' 1-3/4"
Director 1	15' 9-9/16"	20' 11-5/8"
Director 2	16' 6-1/2"	N/A

foot height it proved to be 10 dB stronger than the original casually-designed antenna—an impressive and worthwhile increase in gain, to say the least. The antenna has been excellent on both bands. 

QUICK, EASY, & COMPACT

Flash cards "NOVICE thru EXTRA" theory Key words underlined. Over 4000 sets in use! For beginner, OMs, XYLs & kids.

NOVICE	\$11.95
TECHNICIAN	\$10.95
GENERAL	\$9.95
ADVANCED	\$15.95
EXTRAS	\$14.95
Shipping	1-\$3.00
2 or more	-\$4.00
CLUB DISCOUNTS	



Order Today!
from

VIS STUDY CARDS
P.O. BOX 17377
HATTIESBURG, MS 39404

CIRCLE 104 ON READER SERVICE CARD

GIVE YOUR HR-2510 HR-2600 the same features as the "BIG RIGS"


CHIPSWITCH

4773 Sonoma Hwy, Suite 132
Santa Rosa, CA 95409-4269

Write or call (707) 538-0512 for FREE information

CIRCLE 265 ON READER SERVICE CARD

FREE SAMPLE COPY!




ANTIQUE RADIO CLASSIFIED

Antique Radio's Largest-Circulation
Monthly Magazine

Articles - Classifieds - Ads for Parts & Services
Also: Early TV, Ham Equip., Books,
Telegraph, 40's & 50's Radios & more...
Free 20-word ad each month. Don't miss out!

1-Year: \$29.95 (\$47.95 by first class)
6-Month Trial: \$16.95 Foreign - Write.

A.R.C., P.O. Box 802-E9, Carlisle, MA 01741

Or Call: (508) 371-0512 

Say You Saw It In 73 Amateur Radio Today

1691 MHz Weather Satellite System

1691 MHz Herit Pre-amp. model TS-1691-P. Amp	\$250
1691 MHz Receiver model TS-1691-Recvr	\$450
Decoder Board & Software model TS-VGA-SAT4	\$349
Low Loss Coaxial Cable (65ft) with connectors. other lengths available	\$65
Track II Satellite Orbital Program. Tracks ALL satellites, world map, print out	\$99
1691 MHz Loop Yagi Antenna model 1691-LY(N)	\$99

Demonstration Disc (IBM-PC VGA compatible)
of signals recorded from WX-SAT system. \$3

Shipping: FOB Concord, Mass.
Prices subject to change without notice.



SPECTRUM INTERNATIONAL, INC.
Post Office Box 1084, Dept. S
Concord, Mass. 01742, U.S.A.
Phone: (508) 263-2145
Fax: (508) 263-7008



ELENCO • HITACHI • B&K PRODUCTS GUARANTEED LOWEST PRICES


TO ORDER
CALL TOLL FREE
1-800-292-7711
1-800-445-3201 (Can.)

AFFORDABLE - HIGH QUALITY 2 YEAR WARRANTY

ELENCO OSCILLOSCOPES



STANDARD SERIES
S-1325 25MHz \$349 S-1340 40MHz \$495
S-1365 60MHz \$849



DELUX SERIES
S-1330 25MHz \$449 S-1345 40MHz \$575
S-1360 60MHz \$775

Features:
■ High Luminance 8" CRT
■ 1mV Sensitivity
■ X-Y Operation
■ Voltage, Time, + Frequency differences displayed on CRT thru the use of cursors (S-1365 only)
■ Plus much, much more

Features:
■ Delayed Sweep
■ Automatic Beam Finder
■ 2 Axis Modulation
■ Built-in Component Test
■ Dual time base
■ Illuminated internal grid scale
■ Plus all the features of the "affordable" series

Hitachi Compact Series Scopes

V-212 - 20MHz Dual Trace	\$425
V-525 - 50MHz, Cursors	\$1,069
V-525 - 50MHz, Delayed Sweep	\$995
V-522 - 50MHz, DC Offset	\$975
V-422 - 40MHz, DC Offset	\$849
V-222 - 20MHz, DC Offset	\$695
V-660 - 60MHz, Dual Trace	\$1,375
V-665A - 60MHz, DT, w/cursor	\$1,449
V-1060 - 100MHz, Dual Trace	\$1,549
V-1065A - 100MHz, DT, w/cursor	\$1,895
V-1085 - 100MHz, QT, w/cursor	\$2,125

B&K OSCILLOSCOPES

2120 - 20MHz Dual Trace	\$389
2125 - 20MHz Delayed Sweep	\$539
1541B - 40MHz Dual Trace	\$749
2160 - 60MHz Dual Trace, Delayed Sweep	\$949
2190 - 100MHz Three Trace Dual Time Base, Delayed Sweep	\$1,379
2522A - 20MHz / 20MS/s Storage	\$869



Digital Multimeter
EDM-438
\$175.00
Almost every feature available
Bargain of the decade



Elenco LCR + DMM
LCM-1950
\$79
12 Functions
Freq to 4MHz
Inductance
Capacitance



Digital Capacitance Meter
CM-1555
\$49.95
• Measures capacitors from .1pF to 20,000pF
• 3-1/2 Digit LCD readout with unit indicator



3-1/2 Digit Multimeter
BK-390
\$139.00
• 0.1% DCV accy
• Analog bar graph
• Automatic ranging
• 4,000 count LCD display
• Capacitance measurement
• Temperature probe




Digital Multimeter Kit
with Training Course
By Elenco
M-266SK
\$49.95
• Full function 34 Ranges
• Extra large display • Ideal school project
M-266T (Assembled) \$55.95



Frequency Counter
F-1225
\$225.00
• 8 Digit LED display
• Wide measuring range
• High sensitivity
• Data hold function
• Input impedance 1MΩ or 50Ω
• 10:1 input attenuation function



FM Receiver Kit & Training Course
\$44.95 AR2N6 kit
Ideal training aid for beginners
Makes it fun and easy to learn about
amateur radio
• Covers both 2 meter (144-148MHz) and 5 meter (50-54MHz) FM
• Dual conversion superheterodyne




Butane Soldering Iron
ISOTIP #7980
\$24.95
"Two tools in one"
Perfect, portable tool
for hobbyists and technicians



Combination
EM/microwave
Tester
EM 204
\$89.95
Affordable electromagnetic
(EM) and microwave tests
made easy!



Telephone Kit
PT-223K
\$14.95
Available
Assembled
PT-223
\$18.95




Function Generator
Blox
#8600
By Elenco
\$29.95
\$26.95
Sine, Triangle, Square wave




Learn to Build and Program
Computers with this Kit
MM-8000
By Elenco
\$129.00



Translator Radio Kits
with Training Course
AM/FM Radio
Model AM-FM-100 \$29.95
AM Radio Kit
Model AM-550 \$19.95



Telephone Line Analyzer
KIT TT-400K
\$19.95
Assembled TT-400 \$26.95



Electronic Tool Kit
TK-1000
\$39.95
A professional organizer tool kit
at affordable prices. Includes 25
high quality tools in a high im-
pact carrying case which in-
cludes a pocket for meter.

WE WILL NOT BE UNDERSOLD
ANYWHERE. IF ANY OTHERS CALL
US, WE WILL BEAT THEIR PRICE.
PRICES INCLUDE ALL NECESSARY METERS.

C&S SALES INC.
1245 HORNWOOD DRIVE, FIELD, IL 60135
TEL: (708) 620-0000 • FAX: (708) 620-0000

15 DAY MONEY BACK GUARANTEE
FULL FACTORY WARRANTY
WRITE FOR FREE CATALOG

CIRCLE 184 ON READER SERVICE CARD

CIRCLE 183 ON READER SERVICE CARD

Grounding and Lightning Protection, Part 2

Effective RF grounding for the shack.

by Glen E. Zook W5UOJ

The first part of this article, which appeared in last month's edition, covered information about lightning and lightning protection for the amateur radio station. This month we'll continue with information and suggestions about RF grounding.

Grounding for radio frequency protection is different from that required for lightning protection. The lower the frequency of the amateur radio transmitter, the easier it is to get a good ground. Because the wavelength gets shorter as the frequency increases, the possibility of hitting "hot" spots on the ground system increases dramatically. Thus, on frequencies above 6 meters, a true ground is, for all practical purposes, impossible to achieve.

In this installment we will describe a good RF ground system for 160 through 6 meters. It will help on 2 meters and above, but, as stated before, achieving a truly good ground

on those frequencies is extremely difficult.

First of all, it is imperative that the ground wire be kept as short as possible. In the case of the ground at W5UOJ, it is less than four feet long! Use of stranded #6 wire or heavier copper is strongly recommended. If your station is installed above the ground story of a building, special techniques must be employed to achieve a good ground. Those grounding techniques are beyond the scope of this article. However, many of the tips outlined herein will still apply.

A very low impedance ground system is necessary to prevent all sorts of ills in the RF world. Things such as TVI, BCI, etc., can be greatly reduced and even eliminated when a proper ground system is employed. Because of this, I strongly suggest that you use a large surface ground within the ham shack. Aluminum flashing, available from handyman centers in varying widths, is excellent.

This flashing can be placed on the tabletop or under the equipment, or mounted on the wall behind the operating center. W5UOJ uses the latter method. Since the operating console is two-layered, two separate runs of flashing are placed along the wall behind the console. A third piece of flashing runs between the two, making a horizontal "H." The three pieces are bolted together in several places with #8 bolts.

Grounds to each piece of equipment (and I do mean each piece of equipment) are made with short pieces of braid. Although available as just braid from various sources, it is usually cheaper to remove the braid from old RG58/U coax. Just cut the coax a few inches longer than desired, remove the outer jacket, and then pull the center conductor from the braid. Flatten the braid and either attach it directly to the equipment or add a solder lug and then attach. Connect the other end to the aluminum flashing using #8 bolts. Put the heads on the back side of the flashing and then put a nut on the front side. A second nut with two washers is used to attach the ground braid.

Grounding each and every piece of equipment means that you must ground rotor control boxes, keyers, table lamps (if made of metal), antenna switch boxes, oscilloscopes, etc., in addition to the usual grounding of the receiver, transmitter, linear amplifier, antenna tuner, and the like. Even the low-pass filter (You do use one?) should be grounded separately from the transmitter or linear amplifier. Speaking of linear amplifiers: Use a low-pass filter between the exciter and the amplifier, as well as between the amplifier and the antenna, grounding it as well. This helps limit the possibility of TVI by several factors.

Outside the building there are several possibilities for making the ground connection. The simplest, and not necessarily the best, is a 6- to 8-foot rod driven into the ground. Depending on the soil conductivity, this may or may not be a good ground. Of course, amateurs living in extremely rocky conditions have special considerations, which will not be outlined here because they represent a completely different set of problems.

A relatively cheap but very effective

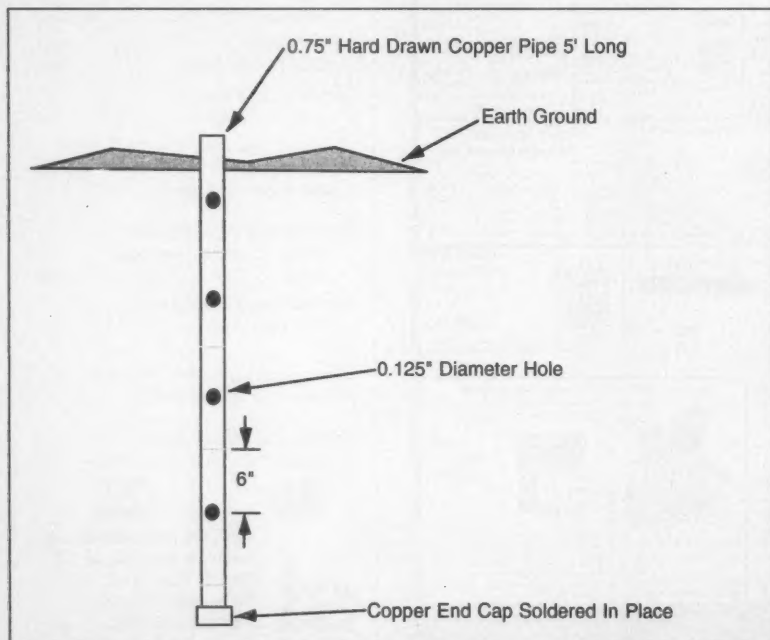


Figure 1. Diagram of the chemical ground rod. Fill it with rock salt (calcium chloride) after driving it into the ground.




3258P \$19.95
Softcover



3362P \$14.95
Softcover




3632P \$10.95
Softcover




4109H \$29.95



4231H \$19.95



4227P \$15.95
Softcover



0404348-XX \$49.50
Counts as 2



4359P \$21.95
Softcover



3711P \$19.95
Softcover




4256P \$19.95
Softcover




3785P \$19.95
Softcover




0111049-XX \$49.95
Counts as 2




4076H \$27.95




4354P \$19.95
Softcover



0785340 \$16.95
Softcover



0304157 \$19.95
Softcover




2701P \$19.95
Softcover



2613P \$19.95
Counts as 2/Softcover



032381X-XXX \$19.50
Counts as 3



0376034-XX \$59.50
Counts as 2



0110646 \$37.95




4213H-XX \$50.00
Counts as 2



0673764-XX \$54.95
Counts as 2

Select any 5 books
for only \$4⁹⁵ (values to \$137.75)

when you join the Electronics Book Club®

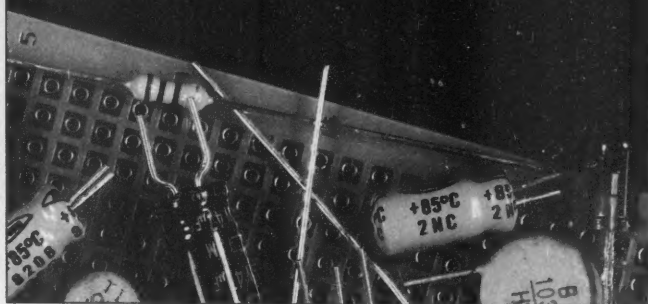

As a member of the Electronics Book Club . . .

. . . you'll enjoy receiving Club bulletins every 3-4 weeks that contain exciting offers on the latest books in the field—at savings up to 50% off regular publishers' prices. If you want the Main Selection, do nothing, it will be shipped automatically. If you want another book, or no book at all, simply return the reply form by the date specified. If you ever receive a book you don't want due to late delivery of the News, you can return it at our expense. You'll also have at least 10 days to decide. Plus, you'll automatically be eligible for FREE BOOKS through the Bonus Book Program. Your only obligation is to purchase 3 more books during the next 12 months, after which you may cancel your membership at any time.

Publishers' prices shown. All books are hardcover unless otherwise noted. If you select a book that counts as 2 choices, write the book number in one box and XX in the next. If you select a book that counts as 3 choices, write the book number in one box and XXX in the next 2 boxes. A shipping/handling charge & sales tax will be added to all orders. ©1995 EBC

Your most complete and comprehensive source for the finest electronics books

Electronics Book Club

A Division of McGraw-Hill, Inc.
Blue Ridge Summit, PA 17294-0810

YES! Please send me the 5 books listed below, for \$4.95 plus shipping/handling & tax, and enroll me as a member of the Electronics Book Club according to the terms outlined in this ad. If not satisfied, I may return the books within 10 days without obligation and have my membership cancelled.

--	--	--	--	--

If you select a book that counts as 2 choices, write the book number in one box and XX in the next.
If you select a counts as 3 choices, write the book number in one box and XXX in the next 2 boxes.

Name _____

Address _____

City _____

State/Zip _____

Phone _____

Valid for new members only, subject to acceptance by EBC. Applicants outside the U.S. and Canada will receive special ordering instructions. Canada must remit in U.S. funds drawn on U.S. banks. All books are hardcover unless otherwise noted. A shipping/handling charge & sales tax will be added to all orders.

STAR395

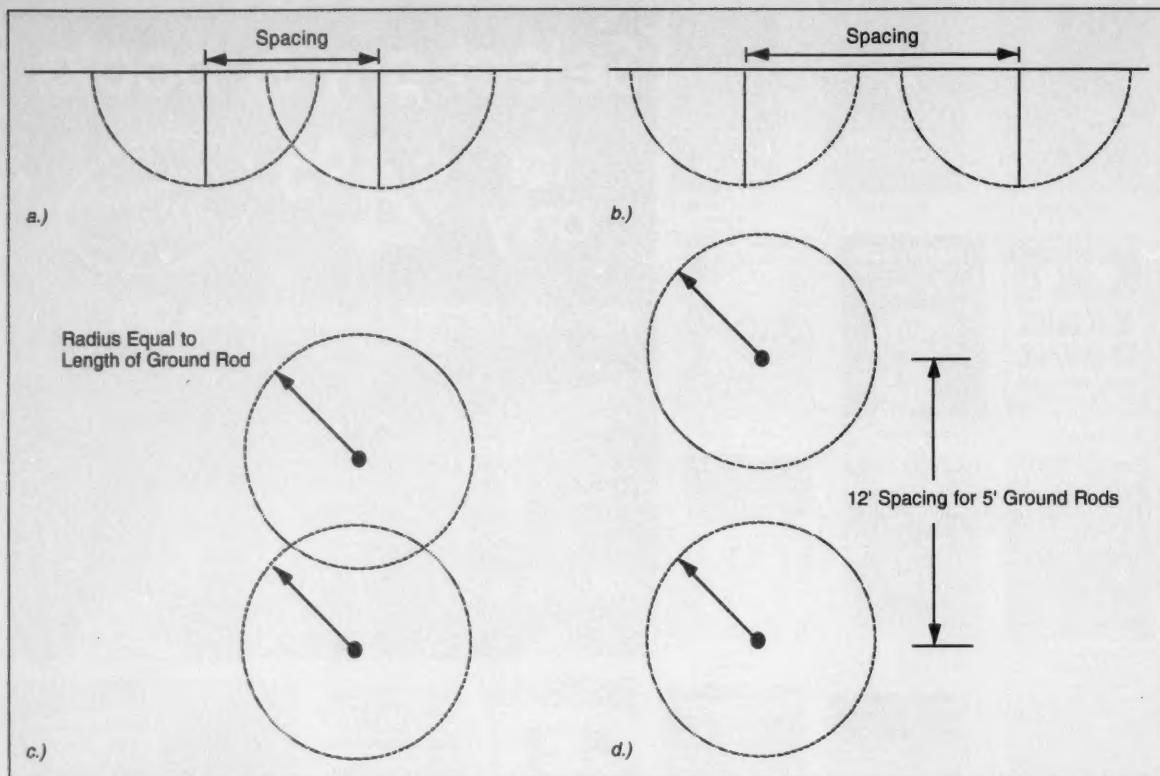


Figure 2.a) Horizontal view of overlapping hemispheres of grounding. The effects are not as good as when the hemispheres are not quite touching. b) When installing two or more ground rods, the spacing should be approximately 2.4 times the length of the rods. For a 5-foot ground rod, the proper spacing is around 12 feet. c) Vertical view of overlapping hemispheres. d) Vertical view of proper spacing of the ground rods.

ground system can be constructed from hard-drawn copper pipe. Sections of this material are available from handyman centers in 10-foot lengths. By cutting the lengths in half, two 5-foot rods are available. It would seem that one 10-foot rod would be better than two 5-foot rods, but this is usually not the case. Installing two 5-foot rods 12 feet apart makes a much better ground system than if a single 10-foot rod were used.

Actually, the copper pipe is made into a very effective chemical ground system by the addition of one 39-cent item and drilling a few holes! See Figure 1. By soldering a pipe cap on the end of 0.75" (3/4") pipe and then drilling 0.125" (1/8") holes every 6" from the capped end, the potential for a chemical ground is achieved. Rotate the drilling 90 degrees each time, going all the way through the pipe. Then, drive the first pipe into the ground (with the capped end going into the ground). After driving, the end of the pipe will be flared, but this causes no problems. Don't use water to help wash the pipe into the ground. This will cause problems with the chemicals added later.

Next, drive the other ground 12 feet away. If you want, you can construct other ground rods and place them 12 feet away from any other ground rods (in whatever direction desired). Then, attach at least #12 (or larger diameter) wire between the ground rods. At-

tach the ground wire coming from the shack to the rod nearest the shack. Next, fill the pipes with rock salt (often sold in grocery stores as ice cream salt). This is calcium chloride, and will not hurt the environment as will copper sulfate or other chemicals.

Do not wet the area around the ground

rods. The natural moisture in the ground will slowly dissolve the salt and increase the ground conductivity immensely. After about a month, refill the pipes with rock salt. Then, every six months refill again. The rock salt costs less than \$2 a bag, and a bag will last several years.

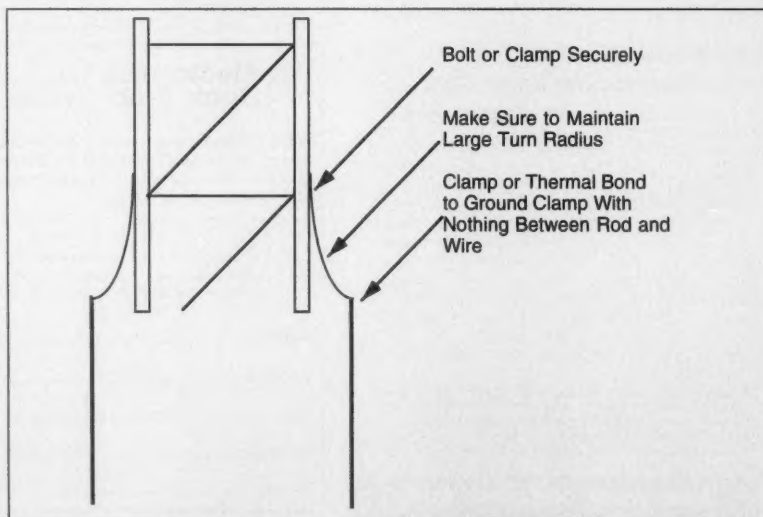


Figure 3. Placement of typical ground wires on a tower.

**CALL MCM
ELECTRONICS
FOR ALL YOUR
ELECTRONIC
PARTS NEEDS**

1-800-543-4330
FAX 1-513-434-6959



MCM ELECTRONICSSM

A PREMIER Company

**CALL MCM
ELECTRONICS
FOR ALL YOUR
ELECTRONIC
PARTS NEEDS**

1-800-543-4330
FAX 1-513-434-6959



MCM ELECTRONICS™

A PREMIER Company

MFJ TNCs for VHF/HF Packet

MFJ-1270C super TAPR TNC clone has a world wide reputation as the most reliable packet TNC in the world! Thousands used as digipeaters, nodes, BBS and in all kinds of commercial applications working 24 hours a day -- many work for years without a single failure . . .

NEW Super TNC-2

- ROM expands to 512K
- External accessible reset
- Built-in monitor amplifier
- Front panel ON/OFF switch
- Enhanced DCD circuit for HF
- Supports 19,200 baud terminals
- Memory Expands to 64K, 128K or 512K



MFJ-1270C **\$119⁹⁵**

The MFJ-1270C super TAPR TNC clone has a world wide reputation as the most reliable TNC in the world!

Thousands are dedicated as digipeaters, nodes, BBS and used in all kinds of commercial applications working 24 hours a day -- many work for years without a single failure.

The Most for Your Money

The most reliable TNC in the world gives you the most for your money. See for yourself . . .

Fully TAPR TNC-2 Compatible

You get full TAPR TNC-2 compatibility -- all software and hardware designed for the TAPR TNC-2 standard works without modification. You get NETROM, theNET and Rose Switch compatibility that turns your MFJ-1270C into a Layer Three and Four networking node.

VHF and HF operation.

You get high performance VHF and HF modems as standard equipment -- for double fun.

You get a true DCD circuit that dramatically reduces sensitivity to noise and dramatically increases completed QSOs.

FREE AC Power Supply

You get a free 110 VAC power supply at no extra cost. With other brands, the AC power supply could cost you an extra \$20.95.

New enhanced Personal Mailbox

The enhanced Easy Mail™ personal mailbox lets you use a dedicated call-sign for your mailbox. Your mailbox can stay on while you operate packet. It will also auto forward or reverse forward mail to and from other BBSs. A check mail LED blinks when you have mail. More features: remote sysop access, sysop paging, mailbox C-text, chat mode and many other features not available in other TNCs. The mailbox memory is expandable to 32K, 128K and 512K.

MFJ's new TNC/Mic Switch

Switch between your TNC or Mic by pushing a button!

Switch between your microphone and TNC by pushing a button!

You won't have to unplug your microphone and plug in your TNC everytime you want to work packet or other digital modes.

Just plug these pre-wired cables into your rig's microphone connector and into your TNC and



Pre-wired Radio-to-TNC cables . . . \$14⁹⁵

	All MFJ	PK-232™	PK-88™	*KAM/KPC3
¹ Icom/Yaesu HTs	MFJ-5024	MFJ-5024X	MFJ-5024Z	MFJ-5024YV
² Kenwood HTs	MFJ-5026	MFJ-5026X	MFJ-5026Z	MFJ-5026YV
Yaesu 8 pin radios	MFJ-5080	MFJ-5080X	MFJ-5080Z	MFJ-5080YH
³ Icom 8 pin radios	MFJ-5084	MFJ-5084X	MFJ-5084Z	MFJ-5084YH
Kenwood/Alinco 8 pin radios	MFJ-5086	MFJ-5086X	MFJ-5086Z	MFJ-5086YH

1 does not include IC-W2A 2 does not include 2500 3 does not include 25A & 255A
4 YV models connect VHF port KAM KPC3. YH models connect HF port of KAM

Cables with connector pre-wired for your radio

MFJ-5082, \$9.95, open end cable with 8-pin mic connector
MFJ-5224, \$9.95, open end cable for Icom/Yaesu handhelds
MFJ-5226, \$9.95, open end cable for Kenwood handhelds
MFJ-5268, \$7.95, open end cable with 8-pin modular phone plug for Yaesu FT-2400H, Kenwood TM641A, TM714A, TM732A

FREE MFJ Catalog

Write or call . . . 800-647-1800

CIRCLE 66 ON READER SERVICE CARD

WeFAX gives you Weather Maps

You get a WeFAX mode that lets you print full fledged weather maps from your HF radio to screen or printer or save to disk using an MFJ Starter Pack.

Plug-in Modem -- 2400 or 9600 Baud

You can add MFJ's optional internal 2400 baud or 9600 baud modem just by plugging it in and making a few simple connections.

KISS interface and MFJ Host Mode

You get a KISS interface that lets you run TCP/IP and MYSYS and MFJ's Host Mode that makes it easy to write efficient application programs.

MFJ Anti-Collision™ Technology

You get MFJ's Anti-Collision™ technology that prevents packet collisions and improves performance on busy channels.

Plus more . . .

You also get 32K RAM, IC sockets for easy service, 256K ROM, speaker jack, lithium battery backup, RS-232 and TTL serial ports, radio cable (you have to add a connector for your radio), Fast-Start™ Manual plus much more. Use 12 VDC or 110 VAC. 9 1/4 x 1 1/2 x 7 1/2 in.

One Year Unconditional Guarantee

You get MFJ's famous No Matter What™ one year unconditional guarantee.

Enjoy Packet for a long, long time

If you want a TNC that'll work 24 hours a day without failure -- one that has more features than any other -- get the ultra reliable MFJ-1270C today and enjoy packet for a long, long time.

2400 Baud Turbo™ TNC

MFJ-1270CT, \$209.95. Has all the features of the MFJ-1270C plus built-in fast 2400 baud modem. Operate 300, 1200 and 2400 baud packet with the MFJ-1270CT. Radio modification is not necessary when operating 2400 baud packet.

you're ready to go -- no more hard-to-find connectors and wiring up cables.

Works with HF, VHF and UHF radios with 8 pin mic connectors -- including Kenwood, ICOM, Yaesu, Alinco and others. For radios with 8-pin RJ-45 modular telephone jack, select the new "M" models.

Plug-in jumpers let you quickly set-up for virtually any radio. Factory set for Kenwood and Alinco. Includes easy-to-follow instructions. Has audio-in and speaker jacks. 3 1/4 x 1 1/2 x 4 inches.

MFJ-1272B/1272M, \$34.95, for MFJ TNC/multimodes, TAPR TNC-2 clones.

MFJ-1272BX/1272MX, \$39.95, for PK-232.

MFJ-1272BYV/1272MYV, \$39.95, for KAM VHF/KPC3.

MFJ-1272BYH/1272MYH, \$39.95, for KAM HF Port.

PACKET plus PACTOR TNC

You get all the features of the MFJ-1270C HF/VHF TNC plus . . . PACTOR . . . precision HF tuning indicator. . . extra 32K mailbox memory . . .

PACTOR MFJ-1276
combines the **\$159⁹⁵**

best of Packet and AMTOR for HF. You get excellent weak signal operation, error correction,

faster baud rate, data compression and full 8-bit word transmissions. A 20 LED bargraph makes HF tuning easy. Just tune your radio to center a single LED and you're precisely tuned in to within 10 Hz -- and it shows you which way to tune!

You also get an extra 32K of memory for your enhanced Easy Mail™ packet mailbox.

MFJ-1276T, \$249.95, same as MFJ-1276 but includes fast 2400 baud modem. Lets you operate 300, 1200, and 2400 baud packet.



TNC ACCESSORIES

MFJ Starter Packs

An MFJ Starter Pack, \$24.95, gets you on the air instantly. You get interface cable, software on disk and instructions -- just plug it all in and start enjoying packet. Order MFJ-1284 for IBM or compatibles, MFJ-1282 for Commodore 64/128, MFJ-1287 for Macintosh or MFJ-1290 for Amiga. For VIC-20 or C64/128 with tape drive use MFJ-1283, \$24.95.

2400 and 9600 Baud Modems

MFJ-2400, \$89.95, operates 300, 1200 and 2400 baud packet and works with any radio. MFJ-9600, \$109.95, G3RUH compatible 9600 baud modem. Not all radios compatible with 9600 baud. Both plug into MFJ TNCs for easy installation.

Mailbox Memory

For MFJ-1270C/1276. Plugs into RAM socket for extra mailbox memory. MFJ-45A (32K), \$14.95, MFJ-45B (128K), \$34.95, MFJ-45C (512K), \$219.95.

Real Time Clock

MFJ-43, \$29.95, ends re-setting TNC clock everytime you turn it on. Maintains correct time even when TNC is off. Plugs into RAM socket. Works with MFJ TNCs and TAPR TNC clones.

FM Deviation Meter


MFJ-52, \$29.95, plug this board into your TNC configured as TheNet X-1J Node and users can check their transceiver packet FM deviation. Requires X-1J or later nodeware. See CQ Magazine, Nov. 1993.

Firmware Upgrade 1.2.9

For older MFJ TNCs. MFJ-40C, \$19.95, gives you enhanced mailbox and supports mailbox up to 512K.

Mailbox Memory Expansion Board

For older MFJ TNCs. MFJ-47A, \$49.95, 32K RAM; MFJ-47B, \$69.95, 128K RAM; MFJ-47C, \$239.95, 512K RAM. Complete with firmware.



Nearest Dealer/Orders: 800-647-1800
Technical Help: 800-647-TECH(8324)

• 1 year unconditional guarantee • 30 day money back guarantee (less s/h) on orders from MFJ • FREE catalog

MFJ ENTERPRISES, INC.
Box 494, Miss. State, MS 39762
(601) 323-5869; 8-4:30 CST, Mon.-Fri.
FAX: (601) 323-6551; Add sh

MFJ . . . making quality affordable
Prices and specifications subject to change © 1994 MFJ Enterprises, Inc.

You can buy commercial ground rods which do this job. However, they cost well over \$100 each! By building your own, you cut the price to less than \$10 per ground rod!

There is a definite reason for placing the ground rods 12 feet apart: The hemisphere of grounding which takes place around each ground rod (see Figure 2). Basically, you want the hemispheres to not quite overlap, but not be too far apart. Thus, 12 feet works out to be virtually optimum with 5-foot ground rods. If you use ground rods of a different length from 5 feet, place them 2.4 times the length apart.

Place chemical grounds at the base of vertical antennas to get the best ground possible. Then, attach radials to the connection between the coax shield and the ground rod. Again, the placement of two or more chemical ground rods will help the performance of the vertical.

In this area, the cost of a 10-foot section of hard-drawn copper pipe (use the more expensive type since it is much harder and drives into the ground easier) was \$8.40. The cost of the end caps was \$0.39 each, and a ground clamp cost \$2.15. These were purchased at a local handyman center. This

makes a total cost of \$13.48 (plus tax), or \$6.74 per ground rod. The rock salt ("ice cream salt") was \$1.39 for a 10-pound bag.

Power Line Grounds

A number of years ago there was a president of a major electric company who also happened to be an amateur radio operator. Over a very short period of time he began to have all sorts of problems with TVI, HiFi I, BCI, telephone I, etc. After exhausting all other sources, the author was called in. It only took a couple of minutes to discover the problem, for the president was relying on his own power company's ground! Needless to say, the very next day there were no less than three power company crews present at his house making the necessary changes to the ground system.

Remember, never rely on any ground that has been provided by the power company, telephone company, or other utility company. Never rely on a ground made to a cold water pipe for, even if your system is a complete soldered copper tubing or copper pipe system, it will still probably be a poor ground since the outside waterpipe is usually something other than copper. In houses with

metal pipes other than copper, the pipe joint compound used in making connections is a very good insulator!

It is a good idea to connect these systems to the ground system, but never rely on a water system for a ground. Besides, many houses these days use PVC piping, which is an excellent insulator. Stay away from gas pipes at all costs! You don't want problems.

If you have a chain link fence, include it in the counterpoise system by connecting it to your ground system. If you are running a vertical, the inclusion of the chain link fence will almost certainly improve the performance of that antenna. But, in all cases, make sure to ground the fence to your primary ground system.

There are all sorts of hints which apply to ground systems. However, by following the guidelines outlined herein, you gain a good ground for your RF. A little work on the front end can save much grief in the long run. I am a firm believer in the practices outlined in this article! Yes, there are probably other methods which can be utilized in grounding, but those outlined here have proven their usefulness. Try them, you won't be disappointed!

From
Micro
Computer
Concepts

RC-1000 REPEATER CONTROLLER

- Autopatch • Reverse Autopatch
- User Programmable CW ID, Control & User Codes & Timeouts

Manual with schematics • 90-Day Warranty
Wired & Tested w/ manual \$239.95



Micro Computer Concepts

8849 Gum Tree Ave.

New Port Richey, FL 34653



813-376-6575

CIRCLE 160 ON READER SERVICE CARD

WEATHER FAX

Satellite & HF FAX for IBM / Clones



Shown
with optional
20 LED Tuning Aid

Features: Processes WEFA, VIS & IR NOAA, ME-TEOR, APT, 240LPM, 120LPM & HFWEFA. Connects to Computer Line Printer Port. The software was created by Dr. Ralph E. Taggart, WB8DAT. For details see Chapter 5, Fifth Edition of the *Weather Satellite Handbook*.

Complete Kit Only \$159.95

Assembled & Tested \$189.95

Optional 20 LED Tuning Aid add \$ 40.00

CA res. add 7.75% sales tax. S&H: \$6.50 (insured).

Foreign orders add 20%. For catalog send

legal size SASE (\$2) to:



A&A Engineering



2521 W. La Palma #K • Anaheim, CA 92801

(714) 952-2114 • FAX: (714) 952-3280

MORSE CODE MUSIC!

SENSATIONAL NEW WAY TO LEARN CODE—Do Aerobics, Sing, Jog, or Drive while learning code! A fun & easy way to learn or retain Morse Code skills. Now the secret is yours with this amazing synchronized breakthrough! Great fun tape for all licenses and classrooms! Order:

"THE RHYTHM OF THE CODE"

Version 2 cassette today!

Send \$9.95 and include \$2.00 S/H to:

KAWA RECORDS

P.O. Box 319-ST

Weymouth, MA 02188

Check or money order only. We ship all orders within 5 days.
MA residents add 5% sales tax.

CIRCLE 2 ON READER SERVICE CARD

For The Ultimate Shack!



100%
made in
the U.S.A.

Imagine your callsign on the
A.R.E. Classic Clock!

- Beautiful, laminated original artwork.
- Quality quartz movement.
- Suitable for wall or desk (approx. 9"x9"x2").
- Runs on one AA battery (included).
- Only \$39.99 (plus \$4.50 shipping in U.S./foreign orders FPO New Hampshire).
- Specify callsign and choice of simulated walnut, light oak or black frame.
- Send check or money order to:

Amateur Radio Excellence
Box 1551 • Manchester, NH 03105

Factory Authorized Dealer & Service For

**KENWOOD
YAesu
ICOM**

Call Us For
Great Prices & Great Service

TOLL FREE ORDER LINE 1-800-344-3144

Continental U.S. & Texas

RECON, INC.

THE HAM CENTER

SAN ANTONIO TEXAS

SALES AMATEUR RADIO SERVICE

0730 Mobad San Antonio, TX 78238 (512) 680-6110

FAX (512) 647-8007

MAKE CIRCUIT BOARDS THE NEW, EASY WAY



WITH TEC-200 FILM

JUST 3 EASY STEPS:

- Copy circuit pattern on TEC-200 film using any plain paper copier
- Iron film on to copper clad board
- Peel off film and etch

convenient 8 1/2 x 11 size
With Complete Instructions

SATISFACTION GUARANTEED

5 Sheets for \$4.95 10 Sheets only \$6.95
add \$1.50 postage

The MEADOWLAKE Corp.
Dept. C P.O. Box 1555
Oneco, FL 34284

J-Pole in your Pocket?

Tough dual-band antenna for the travelin' man or the condo dweller. Hang-anywhere style and extra range can save life in an emergency.

James H. Gray W1XU

During my years of traveling around the eastern United States on business or vacation, I often wished I had a small, inexpensive and easy-to-use antenna to match my little handheld 2 meter radio. Occasionally I had an HF rig in the car, but more often it was the little 2 meter radio which was useful and fun. On long road trips it alleviated boredom, kept me awake and almost always assisted me to find a motel, restaurant, or other ham's QTH. On such trips the mobile antenna was fine until I needed more range from the motel.

When I traveled by plane, the rig was the handheld with no amplifier. It had only a small telescoping whip that I could extend to about 19 inches. If I happened to be close enough to a repeater in a large city, that was fine and I managed to "work" the locals in spite of low power and a minimal antenna.

But there were occasions when there was no local repeater, or when I was inside a steel-and-concrete building. At such times I wasn't able to make any contacts at all and had to resort to dull tedious television programs before going to bed.

If you face similar problems when traveling light and by air, you know how it feels to be alone among the many.

The Pico Solution

Today, the travelin' man has a ready solution to the problem: a neat antenna produced by

Antennas West and called the "Pico-J." It meets all the requirements set forth in the first sentence. Pico means "small," as in "picofarad," and "J" stands for "J-pole," the well-known low-angle, omnidirectional vertically polarized antenna—just what's needed for 2 meters.

Antennas West's Pico-J offers some features not found in the usual J-pole. For example, the feedpoint is already found and matched for you, and the antenna is small and light—so much so that it can be rolled up and slipped into a small eyeglasses case. It looks like a sleek black ribbon 55 inches long. A six-foot small-diameter coax feedline comes off the bottom. Its gold-pin BNC attaches directly to your radio.

A small loop at the top may be slipped over a curtain rod or a nail or

any other suitable projection. But, if by chance you don't happen to find a suitable support, Antennas West thoughtfully provides a small suction cup with an embedded hook that can be slapped up on a window or any smooth surface, and presto!—you're on the air!

Pico-J is completely weather-sealed and could be hung outdoors if you wish. Otherwise, you can hang it in a closet or a doorway; in fact, anywhere that is convenient and where your signal won't be blocked. The extra reach provided by this beauty could save life in an emergency, and is always useful when just plain chatting with the locals.

Your Pico-J stretches range, improves reception, reaches far-away repeaters, and saves your battery pack.

The measured VWSR is less than 2:1 between 142 and 150 MHz—ideal for CAP, MARS, and other services near the 2 meter band—and is a very beautiful 1:1 at 146 MHz. Not bad, eh?

Best of all, considering the benefits, is the price: \$19.95 for the 2 meter model, \$26 for the 2m/70cm dual bander, both complete with the soft vinyl case to store your Pico-J when it's not in use.

On a recent trip I tucked Pico-J into my briefcase, right next to the handheld. No, I didn't even use the "duckie" or the telescoping whip because I had all I needed in this one neat antenna. Maybe you'll find the same.



PASS THIS TEST! WIN \$5

Clip this ad and circle the TigerTail™. Send it with your order to get \$5 off any purchase.

Can You Find the Tiger's Tail?



If your eyes are sharp you can spot the **TigerTail™** in the photo above. It's not attached to something that bites; instead it puts extra growl into the signal from the HT it's attached to.

TigerTail™ improves SWR, lowers radiation angle, and extends range. You can use low power and save your battery pack, but still have a big signal.

Better than an amplifier, it improves reception too. **TigerTail™** does all this by simply slipping under your flex antenna and just hanging down—without sticking up or out or getting in the way.

No Antennas Allowed?

Who will see **Pico-J** hanging in your closet or on the balcony? But your signal will be heard. **Pico-J's** half wave radiator is sleek and unobtrusive. his thin flexible feedline is barely noticeable. When his work is done **Pico-J** rolls up and slides into his pouch like the *Genie* slipping back into the bottle.

Carry **Pico-J** on hikes or trips as you would carry a pair of glasses. Keep him in your emergency jumpkit. When you need gain and low angle omnidirectional coverage pull out **Pico-J** and be full quieting when it counts.

New Pico-J's for 1995

PJ Packet \$22—Maximum efficiency on 2m packet frequencies.
PJ 220 \$19.95—Go everywhere gain for the "private" band.
Pilot's Pico-J \$39—Aviation band range booster for pilots on the go.

—condensed from *RadioFun*

☐ Yes, I want to increase range and save my batteries!

Send my Pico-J. 2m or 220=\$19.95, Packet=\$22, Dual=\$26, Pilot=\$39.

Send my TigerTail. (1 for \$7.95, 2 for \$15, 3 for \$21. Specify band)

Send a combo (PJ + TT). (Just add \$5 to your Pico-J order) All prices ppd.

☐ Yes, I circled the TigerTail! Knock \$5 off my order.

Name _____

Call _____

Phone _____

Street _____

Unit _____

City _____

State _____

Zip _____

Antennas West

Box 50062-S Provo UT 84605

InfoPak

\$1

Order

Hotline

800 926 7373

CIRCLE 57 ON READER SERVICE CARD

The Azden PCS-7200

A solid 222 MHz Mobile FM transceiver.

The Azden PCS-7200 may be a little-known entity, but it is alive and well and putting out good signals on 135 cm FM around the country, and likely elsewhere. Azden is not one of the "big three" Japanese ham equipment manufacturers, and they don't make HF-SSB equipment. But like Alinco, they make some very usable VHF-FM gear that should not be overlooked when it is time to go shopping for that new rig.

Azden's "claim to fame," so to speak, is that they manufacture budget-priced mobile and portable transceivers for 50 and 28 MHz FM. Although Azden has been around selling 2 meter rigs for 19 years now, they have little competition in the 6 and 10 meter arena, which most manufacturers have chosen to almost ignore. But Azden also makes high-quality FM rigs for 144, 222 and 440 MHz, and the PCS-7200 is one of only two 135 cm FM mobile monoband transceivers currently on the market.

I don't know how things are where you live, but here in Southern California 135 cm is almost as popular as 2 meters. There is considerable simplex activity and a great number of high-level 222 MHz repeaters occupy every single available channel on the band. Many of these "machines" offer autopatch, almost unheard of on 2 meters in densely-populated areas; and coverage on 135 cm is almost exactly the same as it is on 146 MHz. This is the only popular amateur band in the

U.S. where every class of licensee has voice privileges, and Novices cut their teeth on "phone" daily by making contacts on 222 MHz.

The Azden PCS-7200 is an excellent entry-level radio for newcomers and old-timers alike. With 25 watts output power and a sensitive, selective receiver, it's a "workhorse" radio that will serve a variety of needs from simplex to repeater, to autopatch, to packet work. It's a pretty radio, like the other Azden mobiles, and is a pleasure to just look at, with its deep orange-backlit LCD display and orange-illuminated microphone pad buttons.

"I don't know how things are where you live, but here in Southern California 135 cm is almost as popular as 2 meters."

The PCS-7200 comes factory-equipped with a PTT/DTMF ("TouchTone") microphone, mike hanger, DC power cord and spare fuse, mobile mounting bracket and hardware, and owner's manual with schematic diagrams. Like most Japanese gear, the Azden does not come with any real service information, but Azden does offer a two-year limited warranty, where all repair costs are borne by the company for the first year and the cost of replacement parts (but not labor) are covered for the second year.


Initial Use and Programming

There are a couple of downsides to the Azden. One: The documentation is a bit lacking. The PCS-7200 does not have its own instruction manual, but uses the PCS-7000 (2 meter rig) manual, with an "Addendum" sheet to clarify the differences. The PCS-7000 manual has typographical errors and other mistakes, and using it with an "Addendum" sheet means referring back and forth between two papers to get things right.

Secondly, the Azden is not particularly "user friendly," and requires real study of the instruction manual. Probably the most important thing to know for FMers is how to program a transceiver's memories with frequency, offset and tone data. The Azden is surely programmable, and has 20 memories which do store all the important data—but the instruction manual uses a page and a half of text describing

how to do it, and until you've programmed the radio a few times, it's a nearly incomprehensible task. As I've said in other product reviews, I rate new equipment for "user friendliness" based on whether I can figure out how to do everything required without ever referring to the instructions. With the PCS-7200, to program each memory you must push the PROG(WR) key six times, and make other keystroke entries as well. It's a task that only Superman could accomplish while driving the freeway, although I'll admit that once I had programmed the first few, the rest of the memory channel programming went quite well (at home, on the bench).

Like the PCS-7500H 6 meter rig, the PCS-7200 defaults to memory "A0" (the first of its possible 20 memory channels) on power-up and does not remember where it was last used. This can take a bit of getting used to, if you're accustomed to other popular brands of FM gear. Also like its 6 meter brother, the 7200's memory storage is only accomplished by turning the radio off at the end of the programming sequence. The following NOTE appears in the manual: "Be sure to turn off the power when you have completed programming. This procedure is required to get each setting programmed in and then to get

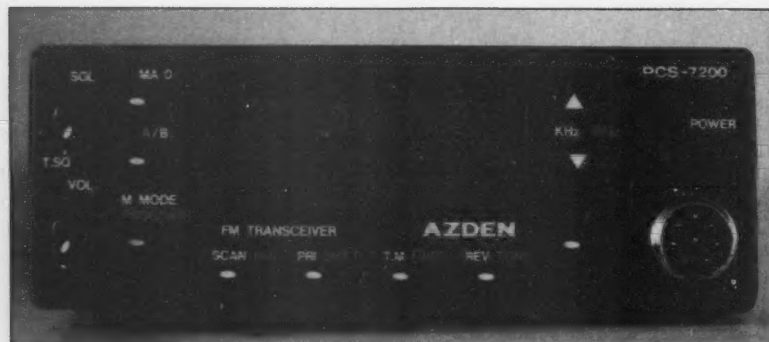

DAYTON hamvention® '95

April 28, 29, 30, 1995

General Chairman, Ken Allen, KB8KE

Asst. General Chairman, Dick Miller, N8CBU

* Giant 3 day Flea Market

* Exhibits

* Activities for the Non-Ham

When and Where

April 28, 29 and 30, 1995; Dayton, Ohio at Hara Arena

Communications

FAXMail (information sent to you via FAX): (513) 276-6934

BBS via America Online: Keyword "Ham", Select "Hamvention"

PHONE: (513) 276-6930. For fast response, please obtain the committee Voice Mail box numbers via FAXMail or BBS.

FAX (incoming): (513) 274-8369

MAIL: Hamvention, Box 964, Dayton, Ohio 45401-0964

Special Services

Lodging information and special award nomination forms are in our 1994 Program. Call FAXMail or BBS for more information.

License Exam by appointment only. Call FAXMail or BBS for details.

Deadlines

In order to have time to return tickets to you, we must have advanced reservation orders postmarked not later than April 8 (USA) or April 1 (Canada). Tickets will not be mailed before January 15th, 1995. Ticket requests that are received **AFTER** the deadline will be processed and **HELD** for pick-up at Hara Arena. Tickets can be picked up beginning Thursday, April 27 at 8:00 a.m.

Flea Market

Flea Market Tickets (valid all 3 days) will be sold IN ADVANCE ONLY. No spaces sold at gate. A maximum of 3 spaces per person (non-transferable). Electricity is available in a portion of the last Flea Market row for \$40 additional per space. Rental tables and chairs are not available in the Flea Market. Vendors **MUST** order an admission ticket for each person when ordering Flea Market spaces. Please send a separate check for Flea Market space(s) and admission ticket(s). Spaces will be allocated by the Hamvention committee from orders received by February 1. Please use 1st class mail *only*.

Notification of Flea Market space assignment will be mailed by **March 15, 1995**. Checks will not be deposited until after the selection process is complete. Please indicate in the box below if you would like to attend regardless of Flea Market space assignment.

Free bus service

Free bus service will be provided between Hamvention, Air Force Museum, Salem Mall and Forest Park Mall parking areas. We are investigating ways to improve service to hotels. Please call our BBS or FAXMail for specific information.

Returned Checks

A \$20 service charge will be assessed on all returned checks.

HAMVENTION is sponsored by the Dayton Amateur Radio Association Inc.

Advance Registration

Enclose check or money order for amount indicated in U.S. dollars and type or print your name and address clearly.

Make checks payable to:

Dayton HAMVENTION Mail to -

Dayton Hamvention Box 1446, Dayton, OH 45401-1446

Flea Market tickets Please check one and enclose **two** checks.

☐ Send admission tickets **only** if flea market space(s) assigned.

☐ Send admission tickets **regardless** of flea market space assignment.

How Many

Admission (valid all 3 days)	@ \$12.00*	\$ _____
Grand Banquet	@ \$23.00**	\$ _____
Alternate Activities		
Saturday Luncheon	@ \$9.00	\$ _____
Sunday Luncheon	@ \$8.00	\$ _____
Flea Market ‡	\$35/1 space	
(Max.3 spaces)	\$70/2 adjacent	
	\$160/3 adjacent	\$ _____
Electricity add	\$40.00/space	\$ _____
Covered tent	\$230.00 ea.	\$ _____
		Total \$ _____

Name _____ Call _____

Address _____

City _____ State _____ Zip+4 _____ - _____

Daytime Phone # () _____ Evening Phone # () _____

* \$15.00 at door

** \$25.00 at door, if available

‡ Admission ticket must be ordered with flea market spaces

out of the programming mode." Weird, but it works.

The PCS-7200 is able to program any frequency offset ("split") on every single memory channel, which is a plus in my book. (Although all our local repeaters here use a minus 1.6 MHz offset, anyway. But that could always change, and it might be different elsewhere.) However, because the Azden lacks any preconceived "offset" of any kind, when programming for use, one must enter both the transmit and receive frequency for every single channel intended. This is quite different from other FM mobile rigs on the market, and takes a bit more time to accomplish. This isn't a big deal if you do all your programming at home and then intend to keep the memory channels as they are for a long time, but it could be an inconvenience for those who fiddle around a lot and like to change memories daily.

A "temporary memory" is also available, and does not occupy one of the main 20 memory channels. Unfortunately, using this feature is too complex to be of much use when driving, so its usefulness might be limited to fixed operation, where one could use the "temporary" memory like one additional channel.

Also, the PCS-7200, like the PCS-7500H, uses a "Tone Code Table" as a reference for CTCSS ("PL" tone) programming. That is, if you wish to program a "PL" tone of 156.7 Hz, this corresponds to Tone Code #25. When entering "PL" data into the Azden, the tone code display is a two-digit one, corresponding to the Tone Code Table printed on page 14 of the instruction manual. If you don't have the manual with you and need to enter some unique "PL" tone on the fly, you'll be hard pressed to remember which two-digit code corresponds to which tone. All the standard 38 CTCSS tones are in there, but it's nearly impossible to remember which one is which without the Table.

The Workhorse

The PCS-7200, for all its quirks, actually works very well. They call it a "MIL-STD-810" radio, which I assume means it is not actually military qualified, but is built to withstand the environmental extremes specified in this military document. I live in a "high-RF" environment that makes many inexpensive VHF/UHF rigs go bonkers with intermodulation products and receiver images: I'm up on a rise with a clear view for 20 or 30 miles in some directions, and that view is of a large city with countless high-powered transmitters populating every hilltop. I'm also just "under" a popular 3600'-high mountaintop bristling with so many transmitting antennas it appears much like a porcupine from here. While most handie-talkies and some mobile radios just roll over and die under the pressure of zillions of high-level signals pouring down the antenna feedline, the Azden doesn't. It just sits there, receiving even weak, distant signals, without a trace of "intermod." Its 25-watt

transmitter is competitive enough (although some 222 MHz rigs run 35 watts, this is only 1.46 dB more power, hardly worth discussing) and is rock-solid. After 10 full minutes of continuous key-down time (OK, so I'm long-winded!), the Azden's power output doesn't fall off. Many of the "50-watt" 2 meter rigs start out running 50 watts or more when cold, but wind down to maybe 40 watts after several minutes of key-down time. The 25-watt Azden doesn't do this, and would probably make a good "remote base" unit capable of rather severe service.

Another "plus" in the Azden's favor is its remarkable receiver audio output stage and speaker. The rig is rated to produce 2 watts of audio power into an 8-ohm load at 10% maximum THD (total harmonic distortion), and it sounds loud, much like a commercial radio. I never had to crank up the volume control more than about halfway to produce room-filling (or car-filling) volume. The rig's top-mounted speaker is also top-notch and doesn't rattle the little rig's cabinet, even with

"While most handie-talkies and some mobile radios just roll over and die under the pressure of zillions of high-level signals pouring down the antenna feedline, the Azden doesn't."

the volume full up. This may sound insignificant, but I think it's a wonderful feature for a mobile rig—one I miss dearly when a rig can't provide enough receive audio to overcome road noise when operating mobile.

Other Features

The memory and band scanning features of the PCS-7200 are as good as those found in any rig I've used. One can scan just the memory channels in "Bank A" (10, A0 through A9), "Bank B" (another 10, B0 through B9), or both A and B. When in the "direct" (VFO, non-memory) mode, the rig will scan between any two frequency limits; however, those limits must be stored in memories. For example, you could store 222.01 in memory A8 and 224.99 in memory A9 and scan between these two limits, thus covering the entire amateur band. You could store another set of lower and upper limits in memories B8 and B9, and scan just between those two. Pushing the PTT button on the mike, or depressing the UP or DOWN keys, the REV(erse) key, the M(emory) MODE key or the F(unction) key will stop the scanning, which may be immediately resumed by depressing the SCAN key again. The only problem is, if your scanning receiver stops on a repeater frequency which was not previously stored in memory, you can't just grab for the mike and start chatting on that channel. This is because the rig won't know exactly where to transmit: It does not have an automatic repeater offset function.

Like most modern FM rigs, the Azden also

contains a PRIORITY mode feature. Activated by depressing the PRI(ority) key, this feature enables the receiver to look for activity on memory channel A0 (automatically the designated priority channel) every four seconds, regardless of where the receiver is actually tuned. If activity is present on the priority channel, a "beep" tone sounds in the speaker to alert you. A momentary press of the M A0 key on the front of the PTT hand mike immediately switches the rig from whatever channel it was on to the priority channel (A0). If you make this fast frequency change and then decide you didn't really need to, another momentary press of the same key will return you to the last channel you were on before switching to the priority frequency. I find this feature very handy, since I really do have a priority frequency around here—222.080 MHz, a popular simplex channel for the San Fernando Valley.


The factory-supplied PCM-499-23 dynamic hand mike contains a 16-key DTMF (Touch-Tone) encoder, as well as UP/DOWN (frequency selection) buttons, the "M A0" (priority channel) button described above, and a rugged coiled cord with attached 8-pin connector. The 16 keys are all softly lighted the same color as the Azden's panel displays, making buttons easy to find in the dark. (I wish all mobile microphones had lighted keys!) The TouchTone encoder produces an

audible sound from the microphone itself, so you can tell if it is working. However, the PCS-7000 manual contains some misleading information regarding operation: It states, "To enable the DTMF encoder function, press the keypad keys correctly in the desired sequence. As each button is pressed, the LED will light. The transceiver is automatically put into the transmission mode when any keypad is pressed. The built-in 'hang timer' causes the transmitter to operate continuously if the delay between keystrokes is less than 2 seconds."

I didn't find any of this to be true. Depressing a key does not make the transmitter operate. I had to depress the PTT button on the side of the mike first. As for the "LED" lighting, there was no LED on the mike supplied with the review unit, so I don't know what LED they're talking about. Also, the "hang timer" doesn't exist on the review unit. If you release the PTT button, even if you're in the middle of a keying sequence on the tone pad, the rig stops transmitting. All these "faults" are forgivable, but I wish Azden would update the manual to make it less confusing for neophytes who may actually become upset if the rig doesn't operate exactly as described. (In speaking with Azden since the review unit arrived, I determined that the new PTT mike does not function as described in the instruction manual, and that is normal. They say most users did not like the "push any button and you're transmitting" function, so they have revised this to be as I have described above.)

Batteries

You've Bought Our Replacement Batteries Before...
NOW YOU CAN BUY DIRECT FROM US, THE MANUFACTURER



YAESU/MAXON

FNB-2	10.8v @	600 MAH
FNB-3/3A	9.6v @	1200 MAH
FNB-4	12v @	750 MAH
FNB-4A	12v @	1000 MAH
*FNB-10(S)	7.2v @	1150 MAH
FNB-12(S)	12v @	600 MAH
equiv. to FNB-11 (1/2" shorter)		
FNB-17	7.2v @	600 MAH
*Same size case as FNB-12		
*FNB-25	7.2v @	600 MAH
FNB-26	7.2v @	1000 MAH
**FNB-26-S	7.2v @	1500 MAH
*FNB-26A	9.6v @	800 MAH
*Same size as FNB-26 case		
FNB27	12v @	600 MAH
**FNB-27S	12v @	800 MAH
** (1/2" longer than FNB27)		

Powerpac+

6 V for Camcorders & 12 V for 2-way



SPECIAL
 FOR THE
 MONTH OF MARCH

on all


ALINCO
 Replacement
 Batteries

LOOK FOR APRIL'S
 SPECIAL OF THE MONTH

MONTHLY DISCOUNTS
 APPLICABLE TO END-USERS ONLY

Charge One or More Batteries With Our Expanding Family of

MasterChargers

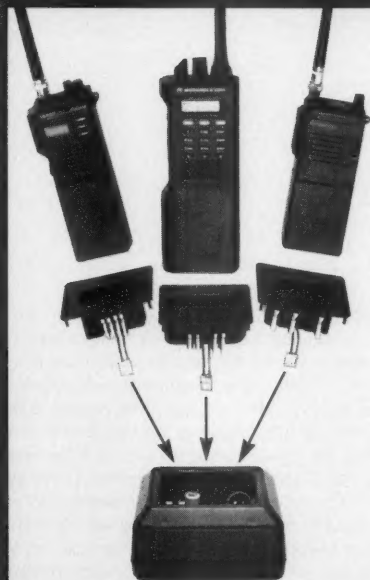

MasterCharger I®

- Charges any Nicad battery from 4.8v to 13.2v with a max capacity of 1.5 AH.
- Charges the battery pack typically in 1/2 to 23/4 hours, then automatically goes into a trickle charge mode.
- A constant current rapid charger, utilizing a Phillips microprocessor based control unit, with Negative Delta (V) detection, to determine when the battery is fully charged.
- Over 50 different adaptor cups available and we are constantly fabricating new ones.
- Works with an A/C adaptor (115VAC or 220VAC) as well as an optional cigarette lighter adaptor cord in a car, boat or plane.
- Comes with a charging cup of your choice and a 115VAC adaptor.

MasterCharger IIa® **NEW!**

- Charges any Nicad battery from 4.8v to 13.2v typically in 8 to 12 hours.
- Utilizes a regulated constant current charging circuit.
- Over 50 adaptor cups available. Utilizes the same cups as MasterCharger I®.
- Comes with a charging cup of your choice and a 115VAC adaptor.

MasterCharger I+IIa® and MasterCharger IIa®+IIa

NEW!



Both charge two batteries simultaneously!

- With the MasterCharger I+IIa® half the charger will function as a MasterCharger I® and the other half will function as a MasterCharger IIa®.
- With the MasterCharger IIa+IIa® both halves will function as a MasterCharger IIa®.
- Adaptor cups are interchangeable from MasterCharger I® to MasterCharger IIa®.
- Comes with and a 115VAC adaptor.



W & W ASSOCIATES

800 SOUTH BROADWAY, HICKSVILLE, NEW YORK 11801

IN U.S.A. & CANADA CALL TOLL FREE: (800) 221-0732 • IN NY STATE CALL: (516) 942-0011 • FAX: (516) 942-1944

ALL SPECIFICATIONS & PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE

I like the mobile bracket Azden supplies with the PCS family of mobile rigs: uncomplicated, unobtrusive, sturdy and easy. Two of the four radio-mounting machine screws have attached plastic knurled surfaces which allow hand-tightening with no need for tools. The other two machine screws do require a Phillips screwdriver, but at least you can get the radio mounted temporarily, without it falling in your lap or on the floor, while you casually install the remaining two screws. This is a thoughtful touch. I also like the Azden schematic diagrams, which are large enough to read without an eye loupe and include a block diagram that clearly details (at least for the technically inclined) what's actually happening inside the rig.

Inside the Radio

Let me take a moment to describe the radio's "guts." Signals entering the receiver from the antenna jack pass through a diode T/R switch (hooray—no relay!) to a 215-230 MHz bandpass filter which is varactor-tuned to resonance by a special "loop filter" circuit programmed by VCO data. Signals are then amplified by a 3SK177 dual-gate MOSFET and bandpass-filtered once again by still another varactor-tuned circuit before driving the first receiver RF mixer. All this "track-tuned" bandpass filtering is probably what makes the Azden's receiver so immune to interference from outside the amateur band. The first mixer is another 3SK177 having LO injection at 200.4 to 203.4 MHz (for tuning 222.0 to 225.0 MHz), provided by a 2SC3838 "RX LO AMP" buffer stage which receives its local oscillator signal from the VCO UNIT which is common to both the transmitter and the receiver. The receiver's first IF at 21.6 MHz is shaped by a 15 kHz bandpass crystal filter and this IF signal is then applied to "IC7," the receiver IF subsystem which contains a bipolar (2SC2715 common-emitter) IF amplifier, and an integrated circuit (MC33610) containing the second local oscillator, second mixer, second IF amplifier, discriminator and squelch circuit. The second LO runs at 21.145 MHz and produces a second IF at 455 kHz, which is bandpass-shaped by a 15 kHz multipole ceramic filter.

Demodulated signals from the IF subsystem are applied to a bipolar 2SC2712 audio preamp whose output is high-pass filtered by an integrated "HPF" 270 Hz rolloff filter (to strip away CTCSS "PL" tones from being heard) before being postamplified by a power integrated audio amplifier, IC5 (a TA7252). The receiver circuit contains other niceties like a three-stage "S METER AMP" circuit that amplifies then rectifies the 455 kHz filtered 2nd IF signal and an "AF MUTE" gate which switches off the drive to the final audio power amplifier on transmit. All in all, a good receiver design that results in sparkling performance under real-world conditions.

On the transmit side, speech from the microphone is first adjusted in level by a "MIC SENS" (mike gain) control VR2 before being applied to an integrated MIC AMP stage, IC11, which both amplifies and shapes the

Table I. PCS-7200 Tests and Measurements

Specification	Measurement
Frequency range, 215-230 MHz (RX) 222-224.995 MHz (TX)	As specified As specified
Transmitter output power: 13.8 VDC source, 50 ohm load 25 watts (high) 5 watts (low)	24W 5.5W
Transmitter current drain: 13.8 VDC nominal source 6.0 A (high) Unspecified (low)	5.5A 2.3A
Transmitter overall power efficiency, Pout(W)/Pin(W): Unspecified	31.6% (high) 17.4% (low)
Receiver sensitivity: <0.12 μ V at squelch threshold <0.35 μ V for 20 dB NQ <0.19 μ V for 12 dB SINAD	0.10 μ V threshold 0.45 μ V 20 dB NQ 0.27 μ V 12 dB SINAD
Receiver selectivity: 12 kHz min (total BW) at -6 dB 30 kHz max (total BW) at -60 dB	12.3 kHz/-6 dB 28.5 kHz/-60 dB
IF rejection: Unspecified	1st IF (21.6 MHz), 102 dB 2nd IF (455 kHz), >136 dB
Receiver current drain: 13.8 VDC nominal source 0.6A	0.28A squelched 0.55A unsquelched
Audio output power: >2W into 8 ohms, 10% THD	2.4W, 10% THD
S-meter and power output meter bargraph display: PCS-7200 uses a 10-segment display but segments 9 + 10 illuminate together, making for 9 increments of resolution. Bargraph reading for full (25 W) output power: 10 segments Bargraph reading for low (5 W) output power: 2-3 segments S-meter readings vs. input signal strength: 1 bar = 0.45 μ V 2 bars = 0.55 μ V 3 bars = 0.65 μ V 4 bars = 0.75 μ V 5 bars = 0.87 μ V 6 bars = 0.95 μ V 7 bars = 1.35 μ V 8 bars = 2.00 μ V 9 bars = 5 μ V	
Note: PCS-7200 receiver can detect very readable signals before its S-meter bargraph display indicates any signal present.	
All data taken by WB2WIK 12/26/94.	

audio response before driving IC10, a 3.4 kHz integrated low-pass filter which rolls off noise and voice harmonics above the range of human speech. The speech audio from this filter is applied to the DEV(iation) control VR4 and then directly drives the integrated VCO UNIT (IC8), the same system which provides local oscillator injection for the first receive mixer. The voltage-controlled oscillator provides frequency-modulated signals directly in the 222 MHz range on transmit, so only RF power amplification, and no frequency multiplication, follows this stage. This surely reduces "phase noise" on the transmitted signal and helps assure close-in spectral purity.

The output from the VCO is amplified by three cascaded bipolar stages (Q11, Q12, Q13). The last of these stages (Q13, a

2SC2407) has "APC" (automatic power control) bias applied by the APC control circuit, which contains the HI/LOW power switching function and power output level adjustments for both HI (VR9) and LO (VR8) ranges. Bias from the APC circuit is also applied to the final RF power amplifier, IC501, a Toshiba S-AV15 hybrid ("brick") module located on the rear heatsink of the radio. The transmitter output from IC501 is filtered by two separate dual pi-section low-pass networks. Also located on the PA board is the transmit-receive (T/R) diode switch, which uses a pair of HI407s, one in series with the transmitter, and one in shunt with the receiver, to perform the switching function. I am unfamiliar with the HI407 and do not know if this is a P-I-N diode or not (but I hope so, as PINs are far better RF switches than conventional P-N

junction diodes, having less loss and better distortion product performance). Between the first dual pi-section TX filter and the series RF switch diode (and the second set of dual pi-section filters) is the directional coupler sampling network, which uses a 1SS106 detector diode to drive the APC amplifier system.

Again, the transmitter circuit appears to be thorough, complete and designed with minimal adjacent-channel interference in mind. Although I pointed out some shortcomings in documentation and operator convenience earlier, I must admit Azden does a pretty good job of making radios that work, even when the going gets tough. The PCS-7200 contains circuitry not always seen in amateur gear and more frequently found in commercial two-way equipment. I applaud their RF engineering, and only wish they'd make this rig more "user-friendly," without the complicated channel programming sequence.

I got the review unit programmed with 20 channels of local simplex and repeater activity, made a few dozen contacts (including bringing up some repeaters more than 150 miles distant not bad for a 25-watt radio!) and then spent a few hours conducting "bench tests" for receiver sensitivity and selectivity, and transmitter output power and current consumption. The results of my testing are shown in Table 1.

One additional comment I might make regarding the PCS-7200's transmit modulation: When I first tried the review unit, I received reports of unclear sibilancy (harsh "S" sounds), and "popping" B's and P's. I reported this back to Azden, who promptly provided me with another microphone. The second mike sounds the same as the first. Azden's Communications Division Manager, Sid Wolin K2LJH, recommended I try speaking across the mike, rather than directly into it, because this is a noise-cancelling microphone designed for the "talk across" technique. I tried this, but still received reports of uncrisp modulation. Listening in a second receiver with headphones, I must admit the modulation is not as crisp and clear as I'd like it to be. Some of this is attributable to the noise-cancelling dynamic microphone; when I tried a different brand of "desk" microphone, it sounded better and more natural. I won't downgrade the PCS-7200 for this, but must relate the experience in the interest of accuracy. Azden boasts about their "true FM" modulation (as opposed to phase modulation, used by some other FM transmitters), but without a better microphone transmit audio isn't all that great.

In all, I like the PCS-7200. What it lacks in ease of setup and documentation it makes up for with good, solid RF performance. Azden used to sell their products only "factory direct" in the U.S.; however, I see that Amateur Electronic Supply now distributes Azden products, and perhaps others will follow. The company has a loyal following among 10 and 6 meter FM enthusiasts, and there's no reason for 135 cm (and probably the other VHF band) users not to take a serious look at their products.

For High Performance in Repeater Technology, Go with the Leader—**SPECTRUM**

S-7R Basic Repeater



- "Stand Alone" or use with your controller



- 10-40 Watt Units
- 2M, 222, 440 MHz
- Super Sensitive/Selective Receivers
- Unusually Good Repeat Audio
- Proven Performance throughout the World!

For that new Machine—Spectrum makes 2 lines of Repeaters—the Deluxe SCR1400 and the new basic low cost S-7R line.

The S-7R Repeaters maintain the quality of design, components and construction which have made Spectrum gear famous throughout the world for years.

However, all of the "bells & whistles" have been eliminated—at a large cost savings to you! The S-7R is a real "work-horse" basic machine designed for those who want excellent, super-reliable performance—but no frills! For use as a complete "stand-alone" unit, or with a controller.

Of course, if you do want a Full Featured/Super Deluxe Repeater with Full panel metering and controls, and a complete list of 'built-in' options, then you want our SCR1400—the new successor to the "Industry Standard" SCR1000/4000.

Available with Autopatch/Reverse Patch/Landline Control; TouchTone Control of various repeater functions; 'PL'; "Emergency Pwr./ID; High/Low TX Power; Tone & Timer Units; Sharp RX Filters; Power Amps, etc.

■ Complete Line of VHF/UHF Rcvr. & Xmtr. Link Boards & Assemblies also available. Plus ID, COR, DTMF Control Bds., Antennas, Duplexers, Cabinets, etc. Inquire.



10-150 Watts

**SCR1400
REPEATER W/150 WT. 2M Amp
& 30A POWER SUPPLY.
(All items available separately)**

Shown in optional cabinet.

Call or write today for details and prices!
Get your order in A.S.A.P.
Sold Factory Direct or through Export Sales
Reps. only.



SPECTRUM COMMUNICATIONS CORP.

1055 W. Germantown Pk, S4 • Norristown, PA • (610) 631-1710 • FAX: (610) 631-5017
CIRCLE 51 ON READER SERVICE CARD

Ham University Interactive

Learn code and theory, and play CW games.

Learning Morse code and amateur radio theory on your laptop or home computer has now taken a giant step forward where no one else has gone before—interactive learning on a Windows format. No shareware nor existing code and theory programs come close to the excitement found in Ham University from ARE (Amateur Radio Education, Inc.), a new company specializing specifically in amateur radio software.

Ham University and the Pentode Morse code game cover any level of amateur radio education, from just getting started and not knowing a dot from a dash up to first class radiotelegraph speeds of 20 and 25 wpm. All levels of amateur radio written examinations cover the latest question pools, including the new Advanced question pool going into effect July 1, 1995. Ham University includes two sections to help you with the written exam, two sections to help you learn and speed-build your Morse code proficiency, plus the addictive game, Pentode, to help you master Morse code without really trying. We found Pentode a terrific way to get kids interested in learning the code and getting into ham radio.

Ham University installs easily on any 386 or higher computer, Windows 3.1, DOS 5.0 or higher. For the Pentode Morse code game, a sound card is required.

I really recommend the sound card for the

entire program because of all of the great sound effects and code-shaping features that the program includes. Code shaping? This allows a code instructor or a volunteer examiner to create code audio with smooth attack and release sounds to eliminate the harshness of most computer-generated CW. Many code programs produce a "thump" that is quite disturbing when practicing the code, or sitting for a code test with a computer creating the exam. With Ham University, code, tone pitch, dit-dah ratio, sound shape, and spacing intervals are fully adjustable on the Windows format screen.

We found you could also begin learning the code with the exact progression of letters recommended by the American Radio Relay League, or the exact progression of letters, numbers, and punctuation marks recommended in our own Gordon West Radio School method. Or you can create your own method of learning the letters, numbers and required punctuation marks for CW.

"Several instructors have their own personal way of teaching certain letters and numbers first, and they can easily tailor the program specifically for their classes," comments Roy Stephens AC6CQ. "The program defaults to the lesson section first, which sets up a series of lessons that introduce the code gradually using the West or ARRL education-

al methods," adds Stephens.

We set aside 20 minutes twice a day to work a few students through the code practice, and in less than a week they were listening to "easy word" sentences made up of the code letters they had just learned.

Pentode

We then switched our students over to Pentode, a Michael Crick exclusive game for making code practice fun. You select which code characters you want to practice. The challenge is to click on the appropriate square for points. Your job is to get rid of the code character boxes by placing them in a central panel. Two characters placed side by side eliminate themselves. This is called a diode. You can keep the screen clear just by making diodes, but if you want a high score, you need to make triodes, tetraodes, and then the pentode.

When you play the code game, you make a triode when you place two similar characters on a diagonal, and then place a third character in the angle so that all three explode at once. You score when you place the final "A" into the slot marked "—." Your score increases very fast as you progress from diodes to pentodes.

If you're good at Morse code, you can keep several characters in your head and not

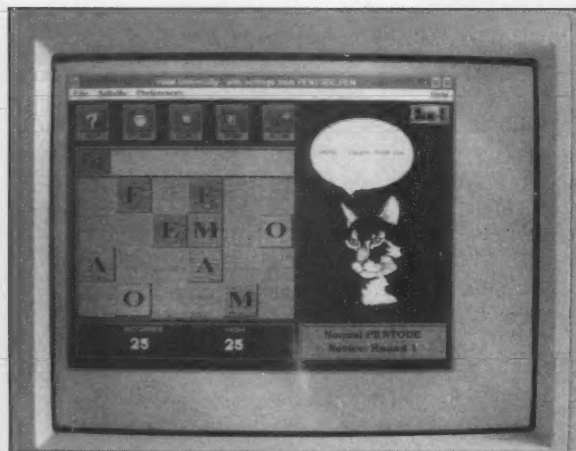


Photo A. Pentode is a fun game with Ham University to learn the code and to build speed. (Photo by Roy Stephens AC6CQ.)

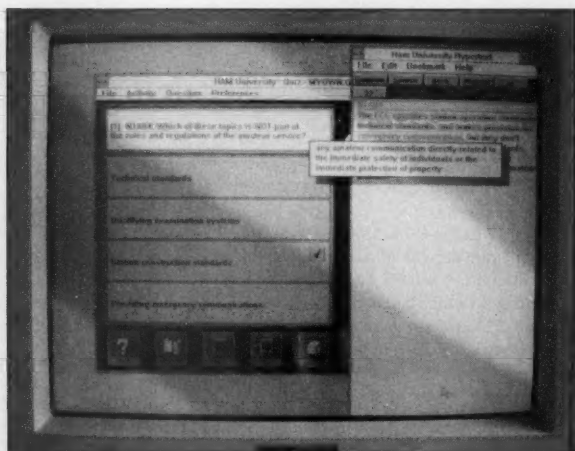


Photo B. All amateur test question pools are on the program, plus Hypertext help files. (Photo by Roy Stephens AC6CQ.)

lose track of what is coming out of the speakers. This gives you multipliers that reward you for this type of stacking.

After 10 rounds (if you survive), you go from Novice to General, and then up through Advanced and ultimately to Extra. At each level, the Morse transmission rate increases.

If you don't know Morse code yet, and just want to play the game, Ham University Pentode can provide the option of having spoken characters instead of Morse code. This option is set from the Pentode dialogue box.

When you complete a game, your score may be eligible for the Hall of Fame. Your kids will probably get there first. And for you grown-ups, if this game sounds a little bit complicated, let the kids try it and they will soon be telling you how to play the game. Chances are they have played other Crick games of this style and the only thing new will be learning the sounds of Morse code to come up with letters.


They don't even realize they're learning a new language called "Morse code"!

Morse Code Test Preparation


We found the Morse code test preparation exercises identical to the methods used by volunteer examiners and VECs who create code tests. And while there are many variations of how a 5, 13, and 20 wpm code test can sound, and what the basic format of the QSO will be, Ham University has so many different types of code tests that you will be well-prepared for anything that may come down the earphones or speakers at your upcoming VE exam.

And for credentialed volunteer examiners with Ham University, you can create a legal 5, 13, 20, or commercial radiotelegraph second class or first class code test that specifically meets the FCC guidelines for CW test administration. This includes the new code tests for both random and text for the commercial radiotelegraph code examination Elements 1, 2, 3, and 4, and amateur Elements 1A, 1B, and 1C.

The Morse code section of this program had almost twice the variable features as other CW programs I have seen and have used extensively for my own code teaching and



The Upper Panel (above) shows you which lesson you are on and shows you which drill is next. You can change the drill by clicking the appropriate button. Each lesson emphasizes a given letter -- the drills in the top row strongly emphasize the current letter and those on the bottom row mildly emphasize it. You can advance through the drills in order or skip them if they are too easy. You can not advance to the next level until you pass the drill marked End. The first drill in each row marked Free lets you go at your own speed -- the others present groups of letters at a fixed speed (which can be set in the Lesson Plan Dialog Box).

You start each drill by clicking  or pressing Enter. Then type the letters you are receiving into the lower panel. Case is ignored and spaces are added automatically. When you complete the drill, the letters that were sent appear in the upper panel so that you can compare them to what you typed.

Sent	ME~EE~ET~MT~MM~TE~ET~MM~TM~TM~MM
Recd.	ME~EE~ET~ME~MM~TE~ET~MM~EM~TM~TM~MM

code tapes. This was instantly recognized when I saw I could actually shape the sound of the code characters coming out of the audio board speakers!

Theory Preparation

For amateur radio theory learning, Ham University gives you more than just questions, answers, and a beep or boop on the correct answer. You get applause. You get cheers. You get AAAHHHAAAASSS when your high score appears after a sample exam. And this makes taking the tests fun because there is a surprise right around the corner with every click of the mouse.

We also see "hypertext" in case you have a problem with any one of the questions on how the correct answer was developed. Theory instructor Bob Gregg AB6CH patterned the "hypertext" similar to the brief descriptions found in my theory books, and he came

up with some great descriptions on how to solve for the right answer, with some shortcuts that I never even thought of! Gregg actively teaches ham radio, so he knows what the students are looking for.

Having the code, theory, and Morse code games in a Windows format puts this program in a timely step with popular computer technology. You're learning 1995 code and theory at a 1995 computer level unlike other programs running much slower and on a basic DOS format. Needless to say, you need a modern computer to work this program, so this could very well be a great excuse to upgrade your system and make ham radio education more fun.

Priced at under \$75, Ham University is available from Amateur Radio Education, Inc., 19032 Pauline Lane, Huntington Beach, California 92646; 714/968-0042; Internet BGREGG@CALSOFT.COM.

71



Dealers for Kenwood, Yaesu, Icom, Cushcraft, AEA, Kantronics, Bencher, Diamond, Astron, MFJ, Hustler, Ameritron, Larsen, ARRL, and more...
Service is also available.

*Get your best price
then call us LAST!!*

(801) 567-9494 - (800) 942-8873
7946 South State Street
Midvale, UT 84047

CIRCLE 156 ON READER SERVICE CARD

All Aluminum

Chassis Kits	Rack Shelves
Cabinet Kits	Rack Equipment Cabinets
Assembled Cabinets	Antenna Grounding Kits
Slope Box Kits	Tower Mounted Box Kits
UHF & VHF Antenna	Dipole Hangers
Power Divider Kits	Other enclosures

Small sheets Aluminum and Brass

Byers Chassis Kits

Charles Byers K3IWK
5120 Harmony Grove Road, Dover, PA 17315
Phone 717-292-4901
Between 6PM and 8:30PM EST, Eves.
"Distributorship Available"

CIRCLE 222 ON READER SERVICE CARD



Handheld Repeater Controller

Spectrum Electronic Products' clude voice IDer, DTMF Con- introduces the world's first triol and programming, hang handheld repeater controller. and time-out timers, Digital No larger than most handheld Voice Operated Squelch radios, the HRC-10 converts (DVOS™), telemetry tones, a single or dual-band radio and private voice mail slot. into a full featured simplex or duplex repeater system. Key features of the HRC-10 in-

\$299

CIRCLE 69 ON READER SERVICE CARD

LOGic 4

Ham radio software for Windows or DOS.

In the May 1992 issue of 73 I reviewed Personal Database Applications (PDA) LOGic II Version 2.1 Ham Logging Software. I was favorably impressed and have since been using it for my personal amateur logging requirements. About a year later, I received LOGic Version 3. This included many enhancements, the foremost being a Packet Cluster interface and a move to a "Windows-like" environment. While LOGic Version 3 was still a DOS application, it used several windows that could be individually moved, sized, and configured. It also made liberal use of pop-up menus and included mouse support.

The programming environment that LOGic is written in has also changed. The original Version 2.1 was written in "DBMAN," a fine commercially-available applications development system in its day. Version 3 and above are written in FOXPRO, a state-of-the-art applications development system providing considerably more performance and features than its older cousin. Finally, I was impressed by the fact that the LOGic System has gracefully evolved over the years from a capable but complex DOS application to an integrated system of amateur radio control. LOGic now provides a Graphical User Interface through Windows or DOS to: logging, rig control, communications (Packet Cluster Interface and terminal program), awards tracking, access to several ham databases on disk or CD-ROM, and an extremely powerful reports generation system.

Installation and Configuration

LOGic-4 requires an IBM-compatible PC with at least a 386SX microprocessor, and 7 megabytes of free disk space for installation. If LOGic is to be installed and run as a Windows application, Windows Version 3.1 with at least 4 megs of RAM are required.

LOGic is available in DOS and Windows versions. The DOS version features a Windows-like interface with full mouse support. The Windows version is the product of choice for those who prefer a true Windows interface. Both versions may be purchased at a substantial savings and will allow you to access the same data from DOS or Windows.

This review covers primarily the Windows version. The DOS side works just as well with access to all the same data. (The Windows version allows changing of screen font types and sizes that are not available under pure

DOS, which does support 25-, 43-, or 50-line display modes).

Installation is virtually automatic. Run Windows and insert the first 3.5" floppy containing the LOGic system. From the "FILES" option in the Program Manager select "RUN" and type: X:\SETUP (where "X" is the floppy drive designation). Installation under DOS is even simpler. From the DOS prompt type: X:\SETUP (where "X" is the floppy drive designation). You will be prompted to install additional disks as necessary.

As the system installs itself, you will be graphically apprised of the installation status. PDA makes liberal use of bar charts and other graphical indicators to show the creation of files, indices and tables.

Upon completion of installation you must enter the "General Ham Setup" menu and tell the system a few things about yourself (e.g.: callsign, lat/long, operating modes, UTC offset, etc.). Once this is done, the fun can begin.

Documentation

The documentation included with LOGic 4 is excellent. It is professionally bound and typeset with laser print quality. It is easy to read and includes both a table of contents

and an index. The document is broken down into two sections. Section 1, "Basic Operations," consists of 64 pages and will do for us what we hams seem to demand: get us going quickly with little reading. Section 2, "Advanced Operations," contains 41 pages and gets into all the nuances of this system.

LOGic 4 lends itself well to the neophyte who wants to start with basic logging requirements. Many people would be happy using only 25% of its capabilities. To realize the true potential of the LOGic system, however, it is necessary to thoroughly read all of the documentation and experiment with the program.

Operation

To the experienced Windows user, the basic functionality of LOGic 4 will be almost intuitive. The first screen presented after clicking on the "PDA LOGic" icon from the program manager will be the PDA logo with the main menu. Menu options may be selected by either typing the first letter of the option or clicking on it with the mouse. Noted that this system may be totally navigated with the mouse; it is no longer necessary to tab or navigate with the arrow keys. The cursor may be placed anywhere on the screen by positioning it with the mouse and clicking on the

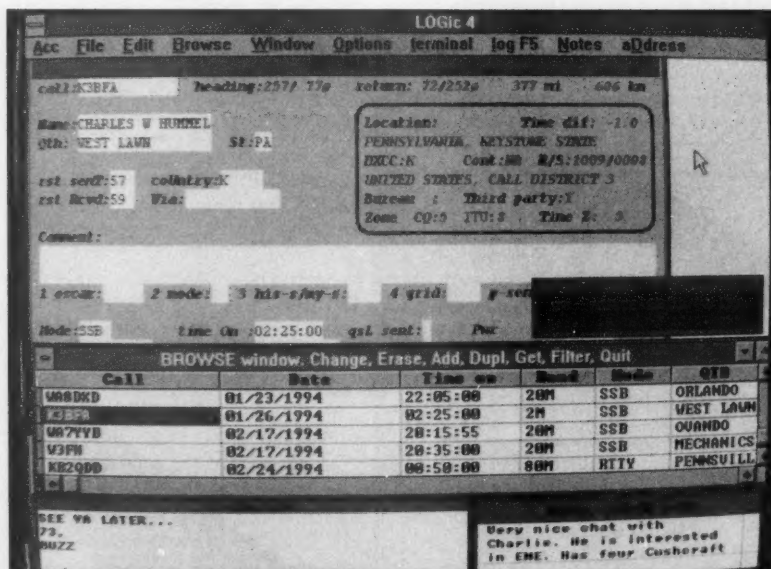


Photo A. The LOGic 4 logging screen that the author edited to be his default logging screen.

MFJ super DSP filter

... Tunable "brick wall" bandpass, lowpass, highpass, notch, SSB, CW filters ...
programmable pre-set filters ... automatic multiple notch filter eliminates heterodynes
... adaptive noise reduction reduces noise and QRN ... for Voice, CW, Data ...

Only MFJ gives you
tunable and programmable
"brick wall" DSP filters

MFJ-784

\$219⁹⁵



MFJ's super DSP filter automatically eliminates heterodynes, reduces noise and interference simultaneously on SSB, AM, CW, packet, AMTOR, PACTOR, RTTY, SSTV, WeFAX, FAX, weak signal VHF, EME, satellite -- nearly any mode you'll ever encounter.

You get MFJ's *tunable FIR linear phase filters* that minimize ringing, prevent data errors and have "brick wall" filter response with up to 60 dB attenuation just 75 Hz away.

Only MFJ gives you *5 tunable DSP filters*. You can *tune* each lowpass, highpass, notch, and bandpass filter including optimized SSB and CW filters. You can *vary* bandwidth to pinpoint and eliminate interference.

Only MFJ gives you *5 factory pre-set filters* and *10 programmable pre-set filters* that you can customize. Instantly remove QRM with a turn of a switch!

You get MFJ's *automatic notch filter* that searches for and eliminates multiple heterodynes.

You also get MFJ's advanced *adaptive noise reduction*. It silences background noise and QRN so much that SSB signals sound like a local FM repeater.

The *automatic notch and adaptive noise reduction* can be used with *all* relevant tunable and pre-set filters.

Automatic gain control (AGC) keeps audio level constant during signal fading.

Automatic notch filter

MFJ's *automatic notch filter* searches for and eliminates multiple heterodynes. It's *milli-second* fast -- interfering CW and RTTY signals are also eliminated.

Voice signals aren't degraded because the notch is *extremely* narrow.

With up to 50 dB attenuation, you'll copy stations otherwise masked by heterodynes, miss fewer calls and be less exhausted.

Leave the *automatic notch filter* on during a phone contest and you'll never hear unwanted heterodynes of tuner-uppers.

You can *selectively* remove tones. Say, you're on CW and a couple of annoying CW stations appear nearby. You can use the two manually *tunable notch filters* -- an MFJ exclusive -- to completely knock them out.

Adaptive noise reduction

Turning on noise reduction silences background noise. Noisy SSB, FM, AM, CW and Data signals become readable.

Noise reduction works in all filter modes and on all random noise -- white noise, impulse noise, static, ignition noise, power line noise, hiss and atmospheric noise.

The LMS algorithm gives you up to 20 dB of noise reduction. Noise reduction is adjustable to prevent signal distortion.

Reducing random noise reduces fatigue, especially when the band is noisy.

Tunable highpass/lowpass filters

For Voice and Data, nothing beats MFJ's exclusive *tunable highpass/lowpass FIR linear phase "brick wall" filters*.

You can *tune* the lower cutoff frequency 200 to 2200 Hz and the upper cutoff frequency 1400 to 3400 Hz.

Signals just 75 Hz away literally disappear -- they are reduced a *thousand* times, 60 dB!

Unlike other filters, speech clarity is not reduced by envelope distortion caused by unequal time delay.

By adjusting the highpass and lowpass filters you can create *custom filters* for Voice, Data and other modes.

When signals are weak, you can improve copy by removing high and low speech frequencies. They contain little information but are full of noise that reduce readability.

On crowded HF bands, overlapping SSB signals make copying difficult. You can improve copy by slicing off some overlap with razor sharp "brick wall" responses.

You can also highpass filter out hum, pulses, rasp and other irritating low frequency noise.

Tunable bandpass filters

Narrow band signals like CW and RTTY jump out of QRM when you switch in an MFJ *tunable FIR bandpass filters*.

You can *tune* the center frequency from 300 to 3400 Hz. And *vary* the bandwidth from 30 Hz to 2100 Hz -- from super tight CW filters to wide razor-sharp Data filters.

As you narrow the bandwidth, interfering signals drop out, because, just 60 Hz away, they're down by over 50 dB.

You can use *narrower bandwidths* to fight tough QRM because these linear phase filters don't distort signals with unequal time delays.

Even with the narrowest 30 Hz bandwidth,

you'll never have a problem with ringing.

One position gives you *two* tunable filters you can use together on one signal. For example, on RTTY, tune one filter to mark, the other to space and set the bandwidth tight for an incredibly sharp RTTY filter.

15 pre-set filters -- use factory set or program your own

You can select from *fifteen* convenient *pre-set filters*. Use them for SSB, AM, CW, packet, AMTOR, PACTOR, RTTY, SSTV, WeFAX, FAX or any mode you can think of.

If you don't like our *pre-set filters*, you can program your own -- an MFJ exclusive! Save center frequency/bandwidth, lowpass/highpass cutoffs, auto/manual notch and noise reduction -- all filter settings -- in *10 programmable filters*.

Only MFJ gives you the best of both worlds -- *tunable filters* to eliminate nearly any QRM and fast convenient *pre-set filters* customized for any mode.

Plus more ...

A push-button bypasses your filter -- lets you hear the *entire* unfiltered signal.

Built-in two watt amplifier. Has volume control, input level control, speaker jack, headphone jack, accessory jack, PTT line and PTT sense and line level output. 9x2 1/2x6 in.

It plugs between your transceiver or receiver and external speaker or headphones. Use 12 VDC or 110 VAC with MFJ-1315, \$14.95.

No Matter What™ guarantee

You get MFJ's famous one year No Matter What™ *unconditional* guarantee. That means we will repair or replace (at our option) your MFJ-784 *no matter what* for a full year.

Call your dealer for your best price

Automatically eliminate heterodynes, reduce noise and QRM on Voice, CW and Data. Call your favorite dealer for your *best price* and order your MFJ *super DSP filter* today!

Free MFJ Catalog

Write or call toll-free ... 800-647-1800

Nearest Dealer/Orders: 800-647-1800
Technical Help: 800-647-TECH (8324)

• 1 year *unconditional* guarantee • 30 day money back guarantee (less s/h) on orders from MFJ • *Free* catalog

MFJ

MFJ ENTERPRISES, INC.
Box 494, Miss. State, MS 39762
(601) 323-5869; 8-4:30 CST, Mon-Fri
FAX: (601) 323-6551; Add \$8 s/h

Prices and specifications subject to change © 1994 MFJ Enterprises, Inc.

MFJ ... making quality affordable

desired destination.

Clicking on the "Logging Screen" option from the main menu selects the default logging screen. I say "default" because this logging screen may be edited to show more or fewer fields, completely new user-defined fields may be added, and windows may be moved, resized or minimized. Photo A shows the logging screen that I edited to be my default logging screen. Since I work satellites, I added an "OSCAR" field to note what satellite I was using. I also added a "MODE" and "S-meter" reading fields to enable the collection of some specialized data. Since I am also active on fast-scan ATV, I added a "P-SENT/RCVD" field to record ATV signal report readings.

I like to use one logging screen for all my routine requirements. There is no reason, however, that separate logging screens for satellite operation or other specialized modes couldn't be created. With LOGic 4, Personal Database Applications supplies logging screens for all major contests. These are accessible from the main menu under the "Select Logging Screen" option. There you will find a menu-driven selection of contests, from "CQ World Wide" to the ARRL VHF Sweepstakes. If you should find a contest that is not included, an existing screen may easily be modified by the user and saved under the "Logging Screen Select" menu. For all contests, LOGic knows how to calculate multipliers and other unique contest parameters.

Another nice feature of all logging screens is that the fonts in most windows may be changed and resized. If you have obtained additional fonts for Windows (eg: Adobe Fonts), they may also be used with LOGic. Their selection is as easy as with any other Windows application: Simply click on the font type and click on the size.

The logging screens are attractive, colorful, and functional. There is a "Browse" window that emulates the ARRL Logbook format. It may be moved and sized to the preference of the user. In this window, the fonts may be changed and resized, allowing for a lot of data to be displayed. An individual QSO may be selected with the mouse, or by using the arrow keys to navigate. The "Browse" window also uses horizontal and vertical scroll bars to display data off the top or bottom of the screen.

The log screen itself may be configured by the user to display any data desired. The log screen is where the user actually enters the data applicable to a QSO. Upon entering a DX callsign, the LOGic system computes and displays a variety of information about the station. The long and short path headings, distance, location, time zone, third-party traffic restrictions, CQ zone, and many other attributes of the station are quickly and attractively displayed. As you enter data in the different fields, many entries are automatically edit-checked for validity and accuracy. You will be notified if you enter an invalid mode, or

any parameter outside of the program specifications. The system can even warn you if you're outside the frequency limits of your license class. LOGic also interfaces to a variety of ham databases and will display in real time all available information about the station as soon as you enter the call.

I like to keep a lot of free-form notes about my QSOs. LOGic 4 has a "Notes Window" on the logging screen that may be selected by a click of the mouse. This window is accessible from anywhere on the logging screen, even if you are in the middle of logging a QSO. It may be resized and moved anywhere you want on the screen. A virtually unlimited amount of text may be entered. LOGic provides automatic text wrap and scroll bars if there is more text than can be displayed in the window.

The logging screen also displays a real-time clock in both local time and UTC. Finally, it includes a window to your TNC as part of a complete Packet Cluster Interface.

LOGic will interface to a TNC or multimode controller connected to either COM1 or COM2 (the on-line help also explains how to use COM3 & COM4). The system will use its awards table to notify you in real time of stations that are needed for DXCC, CQ zones, ITU zones, WPX prefixes and others. It will even filter the packet data through the band table to suppress announcements of stations that are outside of your license class. The extent of the filtering for this function is con-

PROVEN RELIABILITY. AFFORDABLE PRICE

Tri-Ex is pleased to announce the reduction in price on the most popular models of quality Tri-Ex towers for the Amateur radio enthusiast. The overwhelming acceptance of the listed models has made it possible for Tri-Ex to pass on substantial savings to our valued customers.

LM-354 WAS \$1,865 NOW \$1,300

WT-51 Was \$1,245 Now \$1,050

LM-470 \$3,945 \$3,658

The LM-354 is supplied with a hand winch brake system. The LM-470 is motorized.

VISA	TO ORDER CALL 800-328-2393	MasterCard
TECH SUPPORT 209-651-7859		
FAX 209-651-5157		


All towers are complete with rigid concrete base mount and rotator mounting plate. Tri-Ex prints and calculations provided with tower are compliant with 1991 Uniform Building Code (U.B.C.) Engineering designed to 1991 U.B.C. - 70 MPH

Tri-Ex® TOWER CORPORATION
7182 Rasmussen Ave. • Visalia, CA 93291
Unsurpassed Quality since 1954



CIRCLE 22 ON READER SERVICE CARD

3 PORT REPEATER AND LINK CONTROLLER



FEATURES:

- 3-full duplex radio ports
- 1-receive only control port
- Optional Autopatch available
- 200 number autodialer
- 100 Voice/CW messages
- DVR option available
- DTMF control from any port
- 30 user command macros
- 20 Event scheduler
- Time of Day Clock
- 300-9600 baud serial port
- 4-Voltage/Temperature inputs
- Icom/Kenwood remote base
- 4-Layer board construction
- Priced for any groups budget

RLC-2a REPEATER CONTROLLER

Benefits:

With DTMF and serial programming features, your controller is more secure from unwanted access. Use only 1 controller at your site to control up to 3 separate repeaters/links with their own personalities and features intact. Make emergency autopatch calls with the telephone option. Only the RLC-2a can make these features available at such a low price.

ONLY \$649.95



Link Communications, Inc.
115 2nd Ave. N.E., Sidney, MT 59270

Call for information about our complete line of controllers
(406) 482-7515 (Voice) (800) 610-4085 (Orders) (406) 482-7547 (Fax)
E-Mail address linkcomm@ins.infonet.net

CIRCLE 47 ON READER SERVICE CARD

trolled by the user. This data will appear in the Packet Cluster Window on your logging screen with an audible CW signal (or voice announcement if you have a sound card) for those stations that meet the selection criteria. LOGic also contains a terminal program useful for logging on to BBS systems and holding packet/RTTY/AMTOR QSOs if you are equipped with a multimode controller.

While I did not review this function, LOGic also contains a CW keyer that uses a parallel printer port (LPT1 through 3) via a simple interface. LOGic includes a schematic on how to build the interface in the on-line help! Alternately, you can purchase a completed interface from PDA.

Complete control of most transceivers capable of computer interface is included in LOGic. Between the documentation and on-line help there is a wealth of information that should enable this to be accomplished without undue hardship. I was impressed with the detail that PDA included in support of this function. They even included a transverter offset to enter/display the correct frequency for those rigs driving a VHF or UHF transverter.

Finally, LOGic will interface with any antenna rotor with an RS232 interface. If enabled, it will automatically point your antennas along the short or long path as displayed on the logging screen. There is also a table to hold user-definable azimuth offsets to compensate for coupling between antennas on the same

boom or non-standard antenna patterns.

Awards Tracking and Reports

Awards tracking with Logic 4 is almost too easy! Click on the "LOG" option from the main logging screen and select "Awards Tracking." You will be presented with a pull-down menu of award categories (LOGic tracks all known awards and user-definable awards may be added). Click on the award whose status you need to know and a "Progress Summary Modification" menu is presented. Here you can modify the filtering criteria for the award (e.g.: single-band WAS vs. summary of all bands). Select your modifications (or leave it blank for all-band/all-mode summary) and press <enter>2. A window pops up displaying all necessary statistics. Here are my stats for Worked All States (Gee ... not too good for 21 years of hamming!)

Worked.....	49
Confirmed	43
Worked (QSL pending)	0
Worked (no QSL requested)	6
Worked (unconfirmed)	6
Unworked.....	1
Total Unconfirmed	7

While this data may be displayed in real time on the screen, LOGic also allows the user to generate various hardcopy reports for all known amateur awards! These reports are attractively formatted and will be indispensable to the serious certificate hunter.

Finally, on the subject of reports: LOGic

will print your logbook, awards, and other statistics in virtually any format that you wish. The system comes with a variety of "canned" reports that will satisfy 99.9% of even the most serious operators. However, all reports may be modified in format and content with mouse-driven point, click and drag commands. All reports may be edited and previewed in true "What You See Is What You Get" graphical format. New reports may also be created with virtually any information entered in LOGic displayed.

PDA also offers a QSL route list. This option is a database of QSL managers that is automatically accessed in real time as you enter a DX call into your log. It contains over 28,000 QSL managers and addresses.

Summary

There is simply not enough room for this article to completely cover all aspects of LOGic. PDA has entered the marketplace with a state-of-the-art Graphical User Interface (GUI) system of amateur radio control that will set standards of performance. Functionally and cosmetically, LOGic met or exceeded all of my expectations and would be a real asset to any computer equipped ham shack.

LOGic 4 Windows is \$99; LOGic 4 DOS is \$79. If you purchase the Windows Version, the DOS version may be purchased for an additional \$20. There are also upgrade prices from earlier versions.

BATTERY INSERTS

BP-3	8.4v	270mah	\$14.00
BP-3	8.4v	400mah	\$21.00
BP-5	10.8v	600mah	\$20.00
BP-7	13.2v	600mah	\$23.00
BP-8	8.4v	800mah	\$19.00
BP-8	8.4v	1400mah	\$24.00
BP-22	8.4v	270mah	\$21.00
BP-23	8.4v	600mah	\$17.00
BP-24	10.8v	600mah	\$19.00

KENWOOD BATTERY INSERTS

PB-21	7.2v	200mah	\$11.00
PB-2400	9.6v	800mah	\$19.00
PB-25/26	8.4v	600mah	\$21.50

YAESU BATTERY INSERTS

FNB-2	10.8v	600mah	\$19.95
FNB-4/4A	12v	600mah	\$26.00
FNB-10	7.2v	600mah	\$15.00
FNB-12	12v	600mah	\$25.00

MORE BATTERY INSERTS

Tempo S1 Early	270mah	\$19.00
Tempo S2/4/5 Late	600mah	\$21.00
Standard BP-1	270mah	\$21.00
Ten-Tec BP-1	600mah	\$21.00
San-Tec #142#144 Tabs	600mah	\$15.00
Uniden Bearcat	600mah	\$15.00
Uniden Bearcat	800mah	\$19.00
Regency MT1000 Tabs	600mah	\$15.00

* Add \$4.00 Shipping * FL residents add 7% Sales Tax

TNR The Battery Store

279 Douglas Ave., Suite 1112
Altamonte Springs, FL 32714

1-800-346-0601 FAX (407) 682-4469

Sell your product in **73 Amateur Radio Today!**

Call Dan Harper today...

1-800-274-7373

POWER POCKET

12V/2.0 Amp Hours of dependable power, in a convenient soft case. Simply insert the cigarette adapter plug normally used in your car's lighter to instead plug into the POWER POCKET. The POWER

POCKET provides hours of extended talk time, up to 6 times longer than standard battery packs!

• Emergencies - Special Events - Search & Rescue - Hiking - Cycling - Hamfests - Field Day - Etc.

Without

power, your

HT is useless!

Don't be

caught with-

out a POWER

POCKET when

you need it

most.

• Compact slim design that is light weight, only 30 ozs., with a belt loop and shoulder strap included.

• 110V Wall Charger included. Charge rate: 6-8 hours from complete discharge.

• Sealed lead acid case, can be recharged to 100% without memory effect of NiCads.

The POWER POCKET is available from most major Amateur Radio Dealers, or contact:

NCG COMPANY
1275 N. Grove Street
Anaheim, CA 92805
(800) 962-2611
(714) 630-4541
Fax (714) 630-7024



CIRCLE 374 ON READER SERVICE CARD

CIRCLE 54 ON READER SERVICE CARD

by Jeff M. Gold AC4HF and Michael A. Czuhajewski

S & S Engineering's PC-1 Programmable Counter Kit

S & S Engineering
14102 Brown Road
Smithsburg MD 21783
Telephone: (301) 416-0661;
Fax (301) 416-0963

Price Class: Without case—\$69.95;
With case—\$99.95;
Assembled—\$139.95

A low-cost, add-on frequency counter you can build.

I work hard and I play hard. Many times my play centers around ham radio. I find building very relaxing. Sometimes I work so hard that although I really feel like building something, I don't feel like tackling a large project. At times like these I really enjoy building station accessories. I have an HW-9 QRP transceiver that I built. It has the extra WARC pack so it covers eight bands. The analog dial is fairly accurate on most of the bands, but not all. When arranging schedules it is often nice to know exactly where I am. A digital readout that could sit on top of the rig was just what I wanted.

S & S Engineering puts out top-quality kits. They use top-quality parts and provide excellent clear instructions. They have recently come out with the PC-1 programmable frequency counter kit. This counter was designed to provide builders and experimenters with a low-cost counter which can be programmed to start its count at any desired figure. It can also be programmed to count either up or down, and to suppress or not suppress leading zeros. There is an option for AC power and a super-sturdy extruded aluminum case. When the counter is built and

put in the case it makes an excellent external digital display.

S & S takes great care in preparing their kits. Parts are packaged separately and clearly labeled. It is usually a good idea when you first get a kit to take out the parts and separate and label them. This helps avoid putting parts in the wrong place on the printed circuit board (one of the two leading causes for failure of the kit to operate properly once built.) It also allows you to check off the parts and ensure all have been included with the kit. I found that with the way the parts were packaged, I didn't have any need to separate them any more than had already been done. I even found that the IC chips were placed on the foam packing in the order in which they were to be placed on the printed circuit board. Since separating out parts is not something I enjoy, all this made the kit more enjoyable to build.

The printed circuit board is of the absolute highest quality. It is solder-masked on the bottom, which almost eliminates the possibility of solder bridges (the other major cause of kit failure.) The silk-screening is excellent, which makes parts placement much easier. The

board also has plated-through holes, making it easier to solder. The solder almost seems to get sucked up into the holes. It also makes for much more secure solder joints. The downside is that you must be much more careful placing parts: With plated-through holes it is much harder to remove a part once it is soldered on the board.

Another area of detail that makes a kit more pleasurable to build is the quality and clarity of the instructions. I would rather have almost no instructions and a schematic than confusing instructions. S & S provides very clear instructions. The instructions are divided into an introduction that tells you how to get started and the options you have to build the kit as a counter with the display attached to the board, or how to separate the display if you are going to use the counter as a frequency display for a rig. There are then two pages of building instructions. They aren't in the Heathkit form that tells you which hand to hold the wire in, but they are very complete and clear. Next come two pages of alignment instructions. You only need to set one variable capacitor to get the frequency correct at a test point. Next, you set the DIP switches in various positions and test out the functioning of the counter. If you are going to install the counter in a case, instructions are provided for that. I installed mine in one of the S & S cases to use for a display for the HW-9. There are six pages of instructions on how to operate and program the counter for use with various types of VFOs and for different applications. There is also a page on theory of operation. I always appreciate this information as I am continually trying to learn more about how things work. There is a very clear page that shows the parts placement on the PCB (printed circuit board), nice schematics and detailed parts description sheets. I use the parts description sheet as I am placing the parts on the PCB.

I found building the kit to be a total pleasure. The parts count is relatively low and the quality and preparation that S & S has put into the kit really adds to the enjoyment of building it. I did not encounter any problems

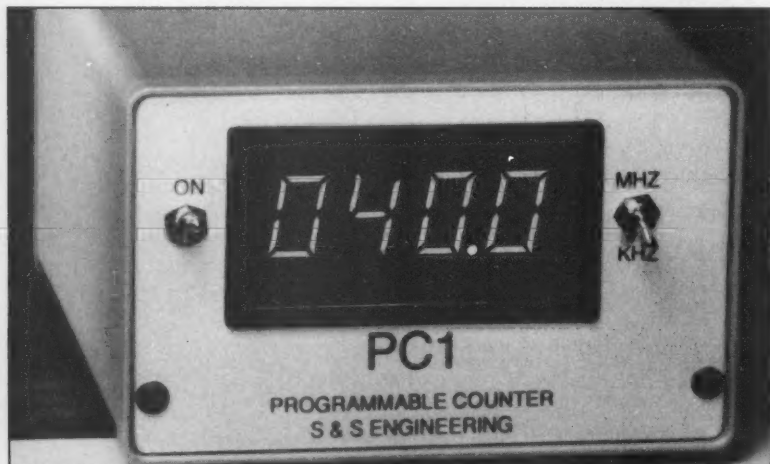


Photo A. S & S Engineering's PC-1 programmable counter.

MFJ ACCESSORIES

Compact Speaker/Mics

Here's a Compact Speaker/Mic that fits comfortably in your hand and has a full size speaker for crystal clear audio.

No need to remove your handheld from your belt to talk or monitor calls. Clip it near your ears so you can easily hear every call with the volume turned down.

First-rate electret mic element and full size speaker gives superb audio on transmit and receive. Earphone jack, PTT, lightweight retractable cord. Gray. 1 1/4x2x3 in.

MFJ-284 fits Icom and Yaesu.
MFJ-286 fits Kenwood.



MFJ-284 or MFJ-286
\$24.95

Mini Speaker/Mics

These tiny MFJ Speaker/Mics are so small and so lightweight you'll forget they're there -- until you get a call.

Excellent audio from electret mic element and speaker. Has swiveling lapel/pocket clip, PTT button with transmit LED, earphone jack, lightweight retractable cord. Available with L or regular connector. Tiny 2x1 1/4x1/4 in.

Order MFJ-285/MFJ-285L for ICOM, Yaesu, Alinco; MFJ-287/MFJ-287L for Kenwood; MFJ-283 for split plug Alinco; MFJ-285W for IC-W2A.



MFJ-283, MFJ-285, MFJ-285L, MFJ-287, or MFJ-287L
\$24.95

L Connector also available - order L model.

MFJ Artificial RF Ground

MFJ-931
\$79.95
Creates artificial RF ground that eliminates or reduces RF hot spots, RF feedback, TVI/RFI, weak signals caused by poor RF grounding.

Greatly improves your signal if you're using a random wire or longwire antenna with an ineffective ground.

Electrically places a far away RF ground directly at your rig by tuning out reactance of connecting wire.

20 Meter CW Transceiver

MFJ-9020
\$179.95
Throw this tiny MFJ 20 Meter CW Transceiver in a corner of your briefcase and enjoy DXing and ragchewing wherever you go. You get a high performance superhet receiver, crystal filter, RTT, AGC, vernier tuning, sidetone, speaker, up to 5 watts output, semi/full break-in, much more. Free manual. See free MFJ catalog for 40, 30, 17, 15 Meter versions, keyer, audio filter, power pack, tuner, antennas.

Super Active Antenna

"World Radio TV Handbook" says MFJ-1024 is a "first rate easy-to-operate active antenna...quiet...excellent dynamic range...good gain...low noise...broad frequency coverage...excellent choice."

Mount it outdoors away from electrical noise for maximum signal, minimum noise. Covers 50 KHz - 30 MHz.

Receives strong, clear signals from all over the world. 20 dB attenuator, gain control, ON LED. Switch two receivers and aux. or active antenna. 6x3x5 in. Remote has 54 inch whip, 50 ft. coax. 3x2x4 in. 12 VDC or 110 VAC with MFJ-1312, \$12.95.

MFJ-1024
\$129.95

Cross-Needle SWR Meter

MFJ-815B
\$69.95
Peak/average Cross-Needle SWR/Wattmeter. Shows SWR, forward/reflected power in 2000/500 & 200/50 watt ranges. 1.8-60 MHz.

Mechanical zero. SO-239 connectors. Lamp uses 12 VDC or 110 VAC with MFJ-1312, \$12.95.

"Teflon" is a registered trademark of Dupont

MFJ Coax Antenna Switches



\$34.95 MFJ-1701



\$21.95 MFJ-1702B



\$59.95 MFJ-1704

Select any of several antennas from your operating desk with these MFJ Coax Switches. They feature mounting holes and automatic grounding of unused terminals. One year unconditional guarantee.

MFJ-1701, \$34.95. 6 position antenna switch. SO-239 connectors. 50-75 ohm loads. 2 KW PEP, 1 KW CW. 10x3x1 1/2 in. DC-60 MHz.

MFJ-1702B, \$21.95. 2 positions plus new Center Ground. 2.5 KW PEP, 1 KW CW. Insertion loss below .2 dB. 50 dB isolation at 450 MHz. 50 ohm. 3x2x2 in. MFJ-1702BN, \$31.95, N connectors, DC-1.1 GHz.

MFJ-1704, \$59.95. 4 position cavity switch with lightning/surge protection. Center ground. 2.5 KW PEP, 1 KW CW. 50 dB isolation at 500 MHz. 50 ohm. 6 1/4x4 1/4x1 1/4 in. MFJ-1704N, \$69.95, N connectors.

Dry Dummy Loads for HF/VHF/UHF

MFJ has a full line of dummy loads to suit your needs. Use for tuning to reduce needless (and illegal) QRM and save your finals.

MFJ-260B, \$29.95. VHF/HF. Air cooled, non-inductive 50 ohm resistor. SO-239 connector. 300 Watts for 30 seconds, derating curve. SWR less than 1.3:1 to 30 MHz, 1.5:1 to 150 MHz. 2 1/2x2 1/2x7 in. MFJ-260BN, \$34.95, N connectors. MFJ-264, \$59.95. Versatile UHF/VHF/HF 1.5 KW load. Low SWR to 650 MHz, usable to 750 MHz. 100 watts/10 minutes, 1500 watts/10 seconds. SWR is 1.1:1 to 30 MHz, below 1.3:1 to 650 MHz. 3x3x7 in. MFJ-264N, \$69.95, N connector. MFJ-5803, \$4.95, 3 ft. coax/PL-259.



\$29.95 MFJ-260B



\$59.95 MFJ-264

MFJ Low Pass Filter

Suppress TVI, RFI, telephone and other interference by reducing unwanted harmonics going to your antenna. 9 poles, MFJ's exclusive Teflon[®] Dielectric Technology[™] capacitors, hi-Q inductors, ground plane shielding, RF tight cabinet gives excellent TVI/RFI protection. Full legal power 1.8-30 MHz. Mounting tabs.

Full Color FAX

Use your computer and transceiver to receive, display and transmit brilliant full color news photos and incredible WeFAX weather maps with all 16 gray levels. Also receive/transmit RTTY, ASCII and CW.

Animate weather maps. Display 10 global pictures simultaneously. Zoom any part of picture or map. Manager lists over 900 FAX stations. Automatic picture capture and save.

MFJ Iambic Paddles

MFJ Deluxe Iambic Paddles feature a full range of adjustments in tension and contact spacing, self-adjusting nylon and steel needle bearings, contact points that almost never need cleaning, precision machined frame and non-skid feet on heavy chrome base. For all electronic CW keys.


MFJ/Benchner Keyer

The best of all CW worlds -- a deluxe MFJ Keyer using a Curtis 8044ABM chip in a compact package that fits right on the Benchner iambic paddle!

Iambic keying, speed (8-50 wpm), weight, tone, volume controls. Automatic keyer or semi-automatic ("bug")/tune mode. RF proof. 4 1/2x2 1/2x5 1/2 in.

MFJ-422BX, \$79.95, keyer only for mounting on your Benchner paddle.

12/24 Hour LCD Clocks



\$19.95 MFJ-108B



\$24.95 MFJ-112

MFJ-108B dual clock has separate UTC and local time displays. Huge 5/8 inch LCD digits are easy-to-see. Brushed aluminum frame.

MFJ-112 shows hour/minute/second, day, month, date, year at any QTH on world map. 12 or 24 hour display. Daylight saving time feature.

VHF SWR/Wattmeter

MFJ-812B
\$29.95
Covers 2 Meters and 220 MHz. 30 and 300 Watt scales. Relative field strength 1-250 MHz, SWR above 14 MHz. 4 1/2x2 1/4x3 in.

Code Practice Oscillator

MFJ-557
\$24.95
MFJ-557 Deluxe Code Practice Oscillator has a Morse key and oscillator unit mounted together on a heavy steel base so it stays put on your table. Portable. 9-volt battery or 110 VAC with MFJ-1305, \$12.95.

Earphone jack for private practice, tone and volume controls for a wide range of sound. Speaker. Adjustable key. Can be hooked to transmitter. Sturdy. 8 1/2x2 1/4x3 3/4 in.

MFJ Multiple DC Outlet

MFJ-1118
\$64.95
Use your rig's 12 VDC power supply to power two HF/VHF rigs and six or more accessories with this MFJ high current multiple DC outlet.

2 pairs of 30 amp 5-way binding posts separately fused for rigs. 6 switched, fused pairs for accessories. DC voltmeter, "on" LED, RF bypassed, 6 ft. of 8 gauge power cable. See free MFJ catalog for more DC outlets.

Write or call... 800-647-1800
Free MFJ Catalog

Nearest Dealer/Orders: 800-647-1800
Technical Help: 800-647-TECH (8324)
• 1 year unconditional guarantee • 30 day money back guarantee (less s/h) on orders from MFJ • Free catalog
MFJ ENTERPRISES, INC.
Box 494, Miss. State, MS 39762
(601) 323-5869; 8-4:30 CST, Mon-Fri.
FAX: (601) 323-6551; Add \$6 s/h

MFJ... making quality affordable
Prices and specifications subject to change © 1993 MFJ Enterprises, Inc.

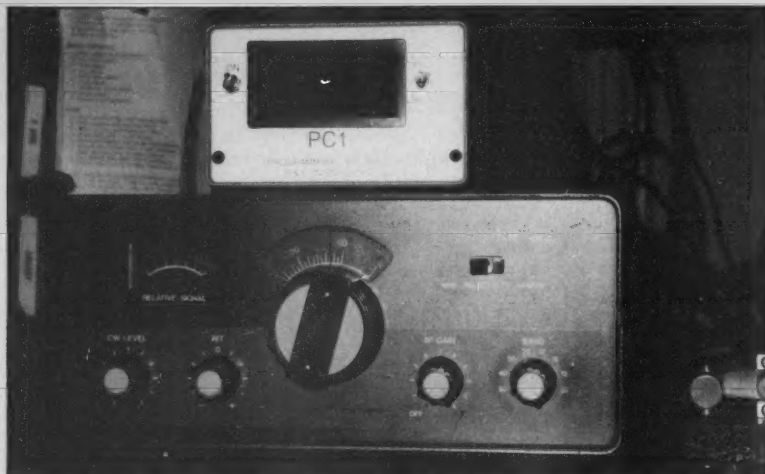


Photo B. The completed PC-1 used as a digital display for the author's HW-9. (Photo by AC4HF.)

with the instructions or with parts not coming with the kit. If you run into any problems you will find the folks at S & S to be a great and friendly source of help.

Technical Description

Operation is straightforward and, for the most part, similar to other counters. The input signal is conditioned a bit, then allowed to

pass to the counting circuitry during a precisely controlled sample period. The results are then displayed with four digits, in either MHz or kHz format. Unlike most counters, the PC-1 can also be used as an external digital display with any VFO-controlled rig.

After a bit of preliminary division, counting is done by a 7217A chip, which also drives the readout. A switch toggles the display be-

tween MHz (00.00) and kHz (000.0). Since the PC-1 is intended mainly as a digital display, it has provisions for presetting the counter chip. Normally, a counter would start at zero and increment as it counts a signal. However, many rigs use a mixing scheme to generate signals, with the VFO at something other than the operating frequency. To accommodate "odd" VFO frequency ranges, the starting count can be offset from zero; this programming is done with DIP switches, and is explained in detail in the manual. The PC-1 can, of course, also be used as an ordinary counter by leaving the offset at zero.

In some cases, a VFO might tune backward, i.e. decrease in frequency as the output frequency increases; another dip switch lets the PC-1 take this into account. Finally, the user can turn off leading zeros in the display (although the manual recommends against that, to avoid confusion).

The signal from the input jack is applied to a resistor and a pair of diodes to provide protection for the input circuitry. It then goes through three transistors—an emitter follower buffer amplifier, a stage of gain, then another buffer. Next, it is applied to a divide-by-two counter; the output of this stage is allowed to pass for the duration of the 200 millisecond gate period. The 200 ms sample of the input frequency is then passed to a divide-by-10 counter, followed by a divide-by-100 stage. Depending on whether the MHz or kHz



Are you looking for the best satellite news, information and ideas? **Satellite Times** covers every aspect of space communications—from commercial, military and broadcast, to amateur, scientific, government, and even private satellites.

Every bimonthly issue is filled with the most up-to-date topics and will bring you into a new era of monitoring.

ST will give you the knowledge you need to successfully monitor and utilize all forms of satellite communications.



Grove Enterprises, Inc.
Publisher, **Monitoring Times**

Subscription:

1 year US: \$19.95 (6 issues)
2 years US: \$36 (12 issues)
3 years US: \$52 (18 issues)

1 year foreign: \$26 (6 issues)
2 years foreign: \$50 (12 issues)
3 years foreign: \$76 (18 issues)

(800) 438-8155


PO Box 98
Brasstown, NC 28902
Toll line: (704) 837-9200
Fax line: (704) 837-2216

THE NEWEST STAR IN SPACE

CIRCLE 280 ON READER SERVICE CARD

HAM RADIO & MORE

National Talk Radio Show With Len Winkler, KB7LPW

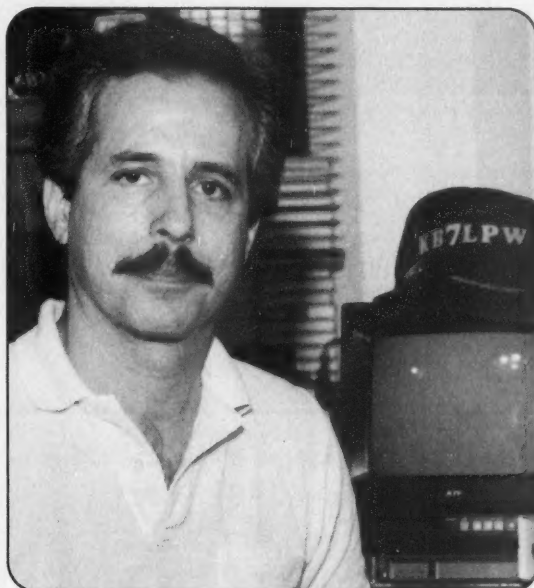

**America's Only
Ham Radio
Show On The
Broadcast
Bands!**

**Sundays
6:00 pm EST**

Weekly Co-Host, John Moore, NJ7E – Weekly DX Update With Lee Finkel, KY7M

Tune in each week for national ham radio news, FCC news, weekly guests from the amateur radio community, ham trivia contests, prizes, listener call-in and more!

Sponsored in part by Radio City, Inc. and 73 Amateur Radio Today and ICOM.

Ham Radio & More Affiliates

AZ: KFNN 1510 am PHOENIX	MA: WNBH 1340 am NEW BEDFORD, PROVIDENCE	NC: WGAI 560 am NORFOLK, PORTSMITH
CT: WATR 1320 am HARTFORD	MA: BOSTON CABLE CHANNEL 38B BOSTON	NC: WSKY 1230 am GREENVILLE, SPARTENBURG
FL: WFFG 1300 am MIAMI, KEYS	MI: WMKT 1270 am TRAVERSE CITY, CADILLAC	OK: KTMC 1400 am TULSA, MCALESTER
IL: WKTA 1330 am CHICAGO	NE: KICS 1550 am HASTING, LINCOLN	OR: KBNP 1410am PORTLAND
IL: WBGZ 1570 am ALTON	NC: WCRY 1460 am RALEIGH DURHAM	PE: WJMW 550 am SCRANTON, WILKES BARE
IN: WPDJ 1300 am HUNTINGTON, FT. WAYNE	NC: WEEB 990 am RALEIGH DURHAM	TE: WRWB 740 am KNOXVILLE
KY: WMTA 1380am CENTRAL CITY, EVANSVILLE		VE: WSYB RUTLAND

Ham Radio & More is also available on Satellite!
Spacenet 3, Transponder 9, 6.8 Audio for Home Dish (Analog).

Find out what radio station airs "Ham Radio & More" in your local area
by calling the originating station, KFNN, at 602-241-1510.

For sponsorship information contact Ron Cohen at 602-241-0482.

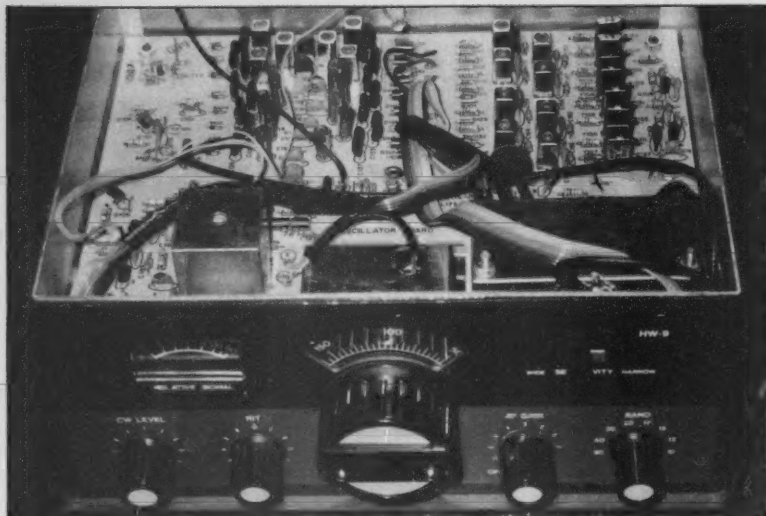


Photo C. Only one wire (which you can see exiting at the left rear) and a ground were needed to connect the PC-1 counter to the HW-9.

display is selected, the signal from either the input or output side of the divide-by-100 stage will be fed into the counter/display chip. The signal is then counted and the results are displayed.

The sampling period is developed by a 4.096 MHz crystal and a 4060 oscillator/divider chip. Its output of 250 Hz is further di-

vided to provide the 200 millisecond gating pulse. Adjustment of the oscillator requires another counter or a synthesized general coverage receiver capable of tuning to 4096 kHz. Unlike many counters, its timebase cannot be compared directly with WWV. DC voltage of 7 to 15 is required to power the PC-1, with an internal three-terminal regulator drop-

ping it to 5 volts. Nominal current draw is about 120 milliamperes. With the AC option, it may also be powered from 6.3 to 12 VAC.

Using the Accessory

After I went through the alignment and checkout procedure, I was anxious to try my display on my Heathkit HW-9 QRP transceiver. I want to keep my HW-9 in original condition, so I am careful to make sure any modifications I do are easily reversible. I wanted to attach the PC-1 without drilling any holes or changing any wiring if possible. I decided I could run the one necessary wire into the rig by leaving out one of the case screws and hook the ground for the counter to a grounded case screw in the rear of the rig. I soldered the counter wire to a test point in the rig and read the frequency. Using my main station rig and another counter as checks, I determined the frequency the HW-9 was actually on. I next followed the programming instructions provided in the S & S documentation and programmed the counter to read the actual operating frequency.

It worked great. I now know exactly where I am on any band. I love turning on the display and tuning across the band. One of the nice things about ham radio is having these flashy gadgets to watch as you are operating. The counter works great and it was worth the price simply for the enjoyment of building the kit.

Look What You Could Be Missing...

DSP Noise Reduction Products From JPS



NIR-10 Noise/Interference Reduction Unit

The NIR-10 allows reception of difficult to read signal and reduces listener fatigue. Operates on radio receiver audio outputs. NIR mode reduces or eliminates heterodynes, white/ignition noise, RTTY interference, and power line noise. PEAK function reduces white noise interference. The Notch Filter mode removes multiple heterodynes and acts in 3 milliseconds. Band Pass mode is continuously adjustable center frequency.



NRF-7 General Purpose Noise Remover and Filter Unit

The NRF-7 reduces atmospheric noise through dynamic peaking. Removes multiple tones from voice signals. High performance CW and Voice Filters. CW filters have selectable center frequency. State-of-the Art Digital Signal Processing.



NTR-1 Wide Band Noise and Tone Remover

The NTR-1 provides wide band operation for AM or FM reception. Narrow band operation for SSB, CW or data reception. State-of-the-Art Signal Processing in "Real Time." Rapidly removes multiple tones from voice signals and operates on receiver audio output.

Also Available:

NF-60 Notch Filter - for removal of multiple tones.

SSTV-1 - DSP Filter for Slow Scan TV - clears up noisy and distorted SSTV pictures.

115 VAC to 12 VDC Power Supply (1 A) - works with all JPS Amateur products.

"First and Finest in DSP Noise Reduction Products"



JPS Communications, Inc.

P.O. Box 97757, Raleigh, NC 27624
(919)790-1011 FAX:(919)790-1456 TECH:(919)790-1048

TOLL FREE ORDER LINE: 800-533-3819

We accept Mastercard, VISA, checks, money orders in US\$.

Free shipping within the continental U.S.

Contact JPS Communications for a dealer near you

CIRCLES 285 ON READER SERVICE CARD

Do You Know...

Striking News From PolyPhaser

NASA Records Color Storm Flashes In Space

Lightning strikes in space have been recorded by NASA's Space Shuttle Challenger. The shuttle's instruments captured a series of colorful flashes in the dark void of space. These flashes, known as "lightning bolts" or "lightning strikes," are caused by the interaction of the shuttle's electrical systems with the surrounding environment. The flashes are typically seen as bright, colorful streaks of light against the dark background of space.



Lightning strikes in space, captured by NASA's Space Shuttle Challenger.



Lightning strikes in space, captured by NASA's Space Shuttle Challenger.



Lightning strikes in space, captured by NASA's Space Shuttle Challenger.

In This Issue...

- PolyPhaser's New 54 Series Shells
- Lightning Protection Trunks and Cabinets
- Radiant Sound Options

- what effect soil pH may have on grounding?
- entrance panels are a last defense against lightning?
- the facts & fallacies of oscilloscope sampling rates?

FREE – join the more than 30,000 readers and learn from **The Leader in Lightning & Grounding Solutions**

K PolyPhaser CORPORATION

(702) 782-2511

FAX: (702) 782-4476

BBS: (702) 782-6728

2225 Park Place • P.O. Box 9000
Minden, NV 89423-9000

CIRCLE 49 ON READER SERVICE CARD




IN YOUR SLEEP YOU YELLED "WOW, CLIPPERTON'S COMING IN, WHERE'S THE MIKE?" GRABBED THE SHOTGUN, AND SQUEEZED "THE PUSH-TO-TALK?"

Sell your product in 73 Amateur Radio Today!

Call Dan Harper today...


1-800-274-7373



BUY AMERICAN, BETTER PRICE AND QUALITY

The SG2000 HF transceiver is type accepted for commercial and marine service made with traditional U.S. commercial radio quality (and of course it can be used on the ham bands also). While the Japanese radios have 2 final transistors that strain to put out 100 watts on the low bands and only 75-85 watts on ten meters, the SG2000 has 4 large transistors that loaf along at 150 watts on ALL THE BANDS INCLUDING 16 METERS! Some of the SG2000 features are: 1) A control head removable (no special kit necessary) up to 150' away from the rig, perfect for automobiles and boats. Up to 8 heads can be utilized and used as intercoms also. 2) The largest display of any HF transceiver. 3) 644 pre-programmed memories and 100 user programmable memories. 4) operable from -50F (-45C) to 185F (+85C). You want quality right? Here is what EVERY SG2000 must endure before they're shipped from the factory: 1) They're factory aligned. 2) EVERY SG2000 is keyed down at full power (CW 150 Watts) into an open antenna for about 10 seconds, then connected to a shorted antenna and keyed down for an additional 10 seconds. 3) EVERY SG2000 is put in the "BURN-IN" rack and keyed down for 24 hours non-stop at full power CW. Don't try that with the foreign radios. 4) EVERY SG2000 is then re-checked for alignment and put in the "TORTURE RACK" where they are keyed on and off every 10 seconds for 24 hours. 5) The SG2000 is then re-evaluated and all control functions are verified to ensure that the microprocessor is up to spec. THEN AND ONLY THEN IS THE SG2000 ALLOWED TO LEAVE THE FACTORY.

The bottom line is price, you know how expensive commercial rigs are normally, we are selling the SG2000 BELOW DEALER COST at only \$1,585.00 each!! That's a \$400.00 savings! We guarantee the best price.



The SG230 SMART-TUNER is the best HF autotuner at any price, and to promote a product that is made in the USA, we're offering it at the guaranteed best price of only \$449.00!! WHY THE SG230? BECAUSE: When you tune an antenna at it's base you are resonating the antenna, instead of just matching the coax to the radio as with other tuners such as the AT50, etc. The result YOUR SIGNAL GETS OUT MUCH BETTER. The Kenwood AT50, AT450 and other similar tuners can only match 3:1 mismatches (YES only 3:1) so forget matching anything but a fairly decent antenna. The SG230 can match from 0.5 Ohm to 10 kilohm antennas (up to a 200:1 mismatch), so it can easily match random wires, dipoles, rain-gutters, shopping carts, etc. The result MORE POWER.

To order, send check or money order with \$8.50 for shipping, along with your shipping address (sorry no U.S. Post Office Boxes, UPS will not deliver) and Telephone number to:



Serving The LORD
Since 1987

Guaranteed
Best
Prices

Joe Brancato
THE HAM CONTACT
PO Box 3624, Dept 73
Long Beach, CA 90803


CA Residents Add 8 1/4% Sales Tax. Alaska, Hawaii, and Canadian Residents please send U.S. Money Order + \$17.10 for shipping.

If you wish more information please send a SASE to the above address. For COD orders, call (310)433-5860, outside of CA **Orders Only** call (800)933-HAM4 and leave a message.

CIRCLE 384 ON READER SERVICE CARD

pauldon ASSOCIATES

210 Utica Street Tonawanda, NY 14150 (716) 692-5451

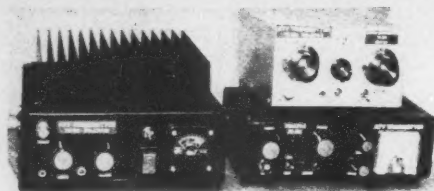

POWER AMPS & PREAMPS

AM & FM 2.0 Mhz - 1.2 Ghz, 2.0 Mhz - 2.3 Ghz

\$75.00 to \$450.00

Special Power Amplifiers for "Rabbit" Linear

ATV Transmitters - Transceivers -
Down Converters 70 CM Up

HTS Systems - "900 Mhz" 10-15 W. Output
FM

Bricks on Boards 2 Mtrs. through 1.2 Ghz

Others products inc. ATV samplers

Write or call for catalog

CIRCLE 339 ON READER SERVICE CARD

Amateur Software and Hardware for the Commodore User

ART-1

ART-1: A complete interface system for send and receive on CW, RTTY (Baudot & ASCII) and AMTOR, for use with the Commodore 64/128 computer. Operating program on disk included.
\$199.00

AIR-1: A complete interface system for send and receive on CW, RTTY (Baudot & ASCII) and AMTOR, for use with Commodore VIC-20. Operating program in ROM.

AIR-1

\$99.95

SWL

SWL: A receive only cartridge for CW, RTTY (Baudot & ASCII) for use with Commodore 64/128. Operating program in ROM.

\$69.95

AIRDISK: An AIR-1 type operating program for use with your interface hardware. Both VIC-20 and C64/128 programs on one disk.

\$39.95

AIR-ROM: Cartridge version of AIRDISK for C64/128 only.

\$59.95

MORSE COACH

MORSE COACH: A complete teaching and testing program for learning the Morse code in a cartridge.

For C64 or C128.
VEC SPECIAL

\$49.95

\$39.95

G AND G ELECTRONICS
OF MARYLAND

8524 DAKOTA DRIVE, GAITHERSBURG, MD 20877



(301) 258-7373



CIRCLE 169 ON READER SERVICE CARD



Serving the LORD
Since 1987

\$49.95!

THE POWER STATION

The POWER STATION is a 12V x 7 AmpHr gel-cell battery complete with voltmeter, wall charger and a cord for charging via automobiles. It will power most HT's at 5 Watts for 2-4 weeks (depending upon how long-winded you are). Also VHF, UHF, QRP, or HF mobiles such as the KENWOOD TS-50 (at 50W). There are no hidden costs, all you need is your mobile, HT power cord or cigarette lighter adapter.

The POWER STATION provides 12V from a cigarette plug and has two recessed terminals for hardwiring. A mini-phone jack with regulated 3V, 6V, or 9V output can be used separately for CD players, Walkmans, etc. THE POWER STATION can be charged in an automobile in only 3 hours, or in the home in 8 hours. The charger will automatically shut off when the battery is completely charged, so you can charge it even when it has only been slightly discharged, (unlike Ni-Cads that have memory). Our charging circuit uses voltage sensing circuitry, other brands are timed chargers which always charge the battery a full cycle, this damages their battery and shortens its' life if it only needs a partial charge. The POWER STATION has a voltmeter that shows the exact state of charge of the battery, not worthless idiot lights that tell you "YOUR BATTERY IS NOW DEAD." The voltmeter can even be used to measure voltages of other sources.



SEE
REVIEWS
NOV. '94 CO
MAY '94 '73

To order, send check or money order for \$49.95 + \$8.50 for shipping, along with your shipping address and telephone number to:

Guaranteed
Best
Prices

Joe Brancato

THE HAM CONTACT
P.O. Box 3624, Dept. 73
Long Beach, CA 90803.

CA Residents Add 8 1/4% Sales Tax. Alaska, Hawaii, and Canadian Residents, please send U.S. Money Order & \$17.10 Shipping.

If you wish more information please send a SASE to the above Address. For CDD orders, call (310) 433-5960, outside of CA Orders only call (800) 933-HAM4 and leave a message. Dealer Inquiries Invited.

HAM HELP

Number 11 on your Feedback card

We are happy to provide Ham Help listings free on a space available basis. To make our job easier and to ensure that your listing is correct, please type or print your request clearly, double spaced, on a full (8 1/2"x 11") sheet of paper. Please indicate if it is for publication. Use upper- and lower-case letters where appropriate. Also, print numbers carefully—a 1, for example, can be misread as the letters l or i, or even the number 7. Specifically mention that your message is for the Ham Help Column. Please remember to acknowledge responses to your requests. Thank you for your cooperation.

Anyone needing a QSL from WA9KAG can get one from N9OZW (his son). WA9KAG became a silent key on 18 Sept. 1994. Please include QSO info and SASE. Pat Malott N9OZW, 1515 W 1000 N, Laporte IN 46350.

NEEDED: Any manuals or programming information for ROCKWELL-COLLINS HF-281. I am willing to pay copying and/or postage costs. Thank you. Art Kenck WA7STB, 2452 Skyline Dr., Salt Lake City UT 84108, Tel. (801) 583-1519.

I am trying to locate Heriberto Sanchez TI5HK, who resided in St. Louis MO in 1958. Nate Williams W9GXR (ex KOCHE), 6915 Prairie Dr., Middleton WI 53562.

Does anyone have an address for Electro-Voc Inc. of Buchanan MI? I am also looking for information on a log-period that covers 6m and up. Thank you. Noel P. Larson, HC86 Box 3860, Merrifield MN 56465.

I am trying to locate Radio or Radar Techs who served at Site #12, Sakata, Japan. Roger Freeman, 2134 Allegheny St., Duluth MN 55811-3210. Tel. (218) 722-6890.

WANTED: To complete my collection: February 1989 issue of 73 Magazine. I will pay postage and a fair price for the magazine. Thanks. Sieb Klaassens VE3JUA, RR #3, Elmwood ON, Canada N0G 1S0. Tel. (519) 369-3262.

I need a tube 4QP2 or 4QP31 for an older Army-Scope. Offers by mail or FAX to H. Schroeter DK3VF, Moorleuter Deich 503, 21037 Hamburg, Germany. Tel/Fax: 040 / 7374246.

NEEDED: Instructions to convert the RADIO SHACK Handheld Realistic FM Transceiver (49 Mc.), Model TRC-505; Cat. #21-405, to the 6 meter ham band. I will pay for magazine or copy, and postage. Thanks. John Wora K2KFG, So. 4907 Clifton Pkwy., Hamburg NY 14075-3341.

**When you call or write to our advertisers—
Tell them you saw their ad in 73!**

HI-PERFORMANCE DIPOLES

Model	Frequency	Length	Price
MPD-5	80, 40, 20, 15, 10M	Max-Performance Dipole 67' or 78' long	\$110.00
MPD-2	80, 40M	Max-Performance Dipole 65' long	\$85.00
MPD-3712	30, 17, 12M	Max-Performance Dipole 31' long	\$73.00
HPD-5	160, 80, 40M	Performance Dipole, select 110' or 125'	\$83.00
SSD-6	160, 80, 40, 20, 15, 10M	Space-Saver Dipole 71' long	\$146.00
SSD-5	80, 40, 20, 15, 10M	42' long	\$110.00
		60' long	\$114.00
			\$4M per Antenna \$6.00

W9HNN ANTENNAS
Box 393 Mt. Prospect IL 60056 708-394-3414

CIRCLE 38 ON READER SERVICE CARD

C. W. WOLFE COMMUNICATIONS

BUY · SELL · TRADE
All Brands of 2 Way Radios
and Equipment


1113 Central, Billings, MT 59102
406-252-9220 Fax: 406-252-9617
Call or write for current flyer

CIRCLE 20 ON READER SERVICE CARD

REPEATER CONTROLLER With AUTOPATCH \$99.95

DTMF Controlled Autopatch and 4 control outputs. Switch selectable CWID. VOX or COR receiver control. Assembled tested board included in kit. LED's for Power, TX, RX, Phone. Intel 8748 microcontroller. Board size 3.8 x 6.3 inches. You add receiver, transmitter, power supply (12v), phone line, and antenna system. Circuit board is top quality, double sided, plated through holes, solder mask on both sides and parts legend. Shipping \$4 for UPS GROUND or \$6 for UPS BLUE, COD add \$4. For more information call or write to:

John Bell (702) 267-2704
1381 Saratoga St. Minden, NV 89423

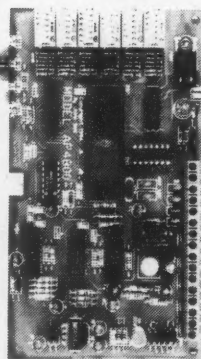

CIRCLE 27 ON READER SERVICE CARD

DSP II Filter



What is DSP? DSP allows the "construction" of various filters of great complexity by using computer code. This allows us to have easy access to a variety of filters, each perfectly optimized for whatever mode we are operating. The DSP II has been designed to operate in 10 different modes. Four filters are optimized for reducing interference to SSB phone signals from CW, heterodynes and random noise interference. Four more filters operate as "brick-wall" CW bandpass filters. The remaining two filters are designed for reliable recovery of RTTY and HF packet radio information signals. A single front panel switch selects any of these filters. Easy hookup to rigs speaker jack.

The W9GR DSP II is the most popular DSP on the market—Thousands in use worldwide!

W9GR DSP Filter\$299.95
12V DC Power Supply.....\$11.95

Personal Autopatch



Make and receive phone calls from your mobile rig or handie-talkie with your own personal autopatch. Connection is easy—just hook-up to the mike and speaker jacks on your base station rig and plug into the phone line! Complete control is assured through touch-tone access codes that you set and change at will. Long distance toll access is controlled by special code that you set, preventing fraudulent usage. All programmable codes and set-ups are stored in special non-volatile memory immune to power failures. Repeater owners use the SDP-600 as well for reliable and solid repeater autopatches. Power required is 12 volts DC at 100 MA. Experience the freedom of owning your own autopatch, on your own frequency, to use when and as you wish. The SDP-600 is made in the USA and carries a one year warranty.
SDP-600 Personal Autopatch, fully wired.....\$249.95
SDPA 12 volt powersupply unit.....\$11.95

j-Com Transceiver Control Computer Interface



The j-Com Transceiver Control Computer Interface is functionally identical to the Kenwood IF-232C, Icom CT-17, Yaesu FT-232C, Ten-Tec 305 and Heath computer interfaces. It will work with all radios and rig control software which use these interfaces.

- No external power supply is necessary. The j-Com TC interfaces require very little power for operation. This power is obtained directly from the computer COM port.
- All electronics are enclosed in the shielded DB-25 connector hood. RFI susceptibility and radiation is reduced.
- Fully assembled and tested.
- Fully Hardware and Software Compatible. Works with all rig controlled software—Free shareware disk included!

RAMSEY ELECTRONICS, INC
793 CANNING PARKWAY VICTOR NY 14564



ORDERS CALL
1-800-446-2295
ORDERS ONLY

TECH/ORDER/INFO (716)924-4560 FAX (716)924-4555
TERMS: Satisfaction guaranteed. Examine for 10 days. If not pleased return in original form for refund. Add \$4.95 for shipping, handling and insurance. For foreign orders add 20% for surface mail. COD (U.S. only) add \$5.00. Orders under \$20 add \$3.00 NY residents add 7% sales tax. 90-day parts warranty on kit parts. 1-year parts & labor warranty on wired units.

j-COM • 793 CANNING PKWY • VICTOR, NY 14564

CIRCLE 55 ON READER SERVICE CARD

73 Amateur Radio Today • March, 1995 51

Ham Television

Bill Brown WB8ELK
c/o 73 Magazine
70 Route 202 North
Peterborough NH 03458

ATV Christmas Present

'Twas the night before Christmas and all through the house not a creature was stirring 'cepting me in my shack. When all of a sudden there came such a clatter, from out of the speaker came 2 meter chatter. With visions of DX dancing 'cross my eyes, I tuned up my TV and was quite surprised! There were Iowa, Missouri, Illinois and Wisconsin; Ohio, Indiana, Kentucky and PA; New York, Arkansas and Michigan too; it was certainly an

ATV dream coming true!

The Big Opening

As some ATVers put it during the marathon band opening that began Christmas Eve and continued for three straight days, this had to be the Granddaddy of ATV band openings; conditions not seen since the great opening of Thanksgiving '86. Although contacts exceeding 2,500 miles have taken place over water (Hawaii/CA—the Great-Granddaddy of openings), it's pretty rare for contacts exceeding 500 miles to take place over land. These contacts took place with regularity during this opening with signal levels often approaching P5.

The 2m ATV calling frequency (144.34 MHz) sounded like 20 meters during a rare DX pile-up. Video was flying fast and furious on 439.25 MHz over a several-state area stretching from Arkansas and Missouri all the way east to western New York State.

There was a large high pressure area centered over the region that produced clear, cold weather conditions with nearly 100% humidity and no wind. Thick layers of frost settled over everything and a dense fog formed over a large portion of the Midwest. This set up an incredible tropo condition that slowly worked itself toward the east over the next few days. Christmas Eve saw many contacts between Ohio, Michigan, Indiana and Illinois, as well as Iowa to the west. During Christmas Day, Tom Para WA8ZAH in Cincinnati, Ohio, worked Elmo Knoch K4YWL in Osage, Arkansas, with nearly P5 pictures exchanged (a distance of 540 miles; see Photo A).

The opening never seemed to die out even during daylight hours and really stretched out on Monday night and into the wee hours of Tuesday morning. The most notable contacts were between Dave Williams WB0ZJP (O'Fallon, Missouri) and Jim Dallas KA3FZF (Monroeville, Pennsylvania), with P4 to P5 signals over a 594-mile path (see Photo B), and between WB0ZJP and KA8VWV in Moundsville, West Virginia, (P2 levels) at 535 miles.

Many ATV repeaters could be seen across the region; it was quite fascinating to watch the DX rolling through a repeater that was hundreds of miles away. There was even one report that the Columbus, Ohio, ATCO repeater was seen in Nashville, Tennessee.

By Tuesday evening there were dozens of ATVers still active (most with cases of severe sleep-deprivation). This time contacts were made in a mostly north-south path between Michigan, Ohio, Kentucky and Penn-



Photo A. Tom WA8ZAH in Cincinnati, Ohio, and Elmo K5YWL in Osage, Arkansas, exchanged nearly P5 pictures during Christmas Day over a 540 mile path. Off-the-air video digitized by Tom WA8ZAH.



X-BAND TRANSMITTER

Miniature (2 1/4 x 3/4 x 1") GaAs microstrip transmitter provides 10 dBm centered at 10.525 GHz. Integrated microstrip patch antenna eliminates the need for an external antenna. Advanced matching techniques secured good temperature stability with low frequency pulling. Great for long-range testing of radar detectors, calibration of radar receiving equipment, and point-to-point communication links.

Complete Assembled System \$39.00

Parts & Instruction Kit \$29.00

Plus \$2.00 Shipping and Handling


INNOTEK Inc.

P.O. Box 80096, Fort Wayne, IN 46898
(219) 489-1711

Visa • MasterCard • Check • Money Order • COD
Money-Back Guarantee

CIRCLE 283 ON READER SERVICE CARD

DIRECTION FINDERS



VECTOR-FINDER

HAND-HELD
PHASE SENSE
ANTENNAS FOR
VHF DIRECTION
FINDING. USES
ANY FM RCVR.
ARMS FOLD FOR
STORAGE.

TYPE VF-142 144-220 MHZ \$139.95

TYPE VF-142Q LEFT-RIGHT LEDS &

AUDIO, 144-220 MHZ \$239.95

TYPE VF-142QM SAME AS Q MODEL

EXCEPT FREQ. 144-500 MHZ \$289.95

TYPE VF-121Q SAME AS VF-142Q

PLUS 121.5 MHZ ELT FREQ \$379.95

CALL ABOUT HF DF, ADD \$4.50 S/H

ATTENUATORS CA ADD TAX

RADIO ENGINEERS


7969 ENGINEER RD, #102
SAN DIEGO, CA 92111

619-565-1319 FAX 619-571-5909

CIRCLE 58 ON READER SERVICE CARD

Slow Scan TV

doesn't have to be expensive anymore!



Every day more hams are enhancing their communication by using images. Join the fun and see what you've been missing.

Quality Color SSTV is easy and affordable with **Pasokon TV**. \$239.95


Requires IBM PC-compatible, 386 or better CPU, 1 Megabyte of memory, color VGA display, MS-DOS. Shipping: \$5 to U.S.A. and Canada, \$15 for others. Write or call for complete details.

Absolute Value Systems
115 Stedman St. # 7
Chelmsford, MA 01824-1823
(508) 256 6907
e-mail: johnl@world.std.com

CIRCLE 351 ON READER SERVICE CARD

AMATEUR TELEVISION

GET THE ATV BUG



≥10 Watt pep

**Transceiver
Only \$499**

Made in USA
Value + Quality
from over 25 years
in ATV...W6ORG

Snow free line of sight DX is 90 miles - assuming 14 dBd antennas at both ends. 10 Watts in this one box may be all you need for local simplex or repeater ATV. Use any home TV camera or camcorder by plugging the composite video and audio into the front phono jacks. Add 70cm antenna, coax, 13.8 Vdc @ 3 Amps, TV set and you're on the air - it's that easy!

TC70-10 has adjustable 10 Watt p.e.p. with one xtal on 439.25, 434.0 or 426.25 MHz & properly matches RF Concepts 4-110 or Mirage D1010N-ATV for 100 Watts. Hot GaAsfet downconverter varicap tunes whole 420-450 MHz band to your TV ch3. 7.5x7.5x2.7" aluminum box.

Transmitters sold only to licensed amateurs, for legal purposes, verified in the latest Callbook or send copy of new license.

Hams, call for our complete 10 pg. ATV catalog including downconverters, transmitters, linear amps, and antennas for the 400, 900 & 1200 MHz bands.

(818) 447-4565 m-f 8am-5:30pm pst Visa, MC, UPS COD

P.C. ELECTRONICS


2522 Paxson Lane Arcadia CA 91007

Tom (W6ORG)

Maryann (WB6YSS)

MoTron Electronics

310 Garfield St. Suite 4 PO Box 2748 Eugene, Oregon 97402



This is an actual FingerPrint captured by the TxID-1.

TxID-1

**Transmitter
FingerPrinting
System**

Now Shipping!

FM/AM radio transmitters have a unique frequency versus time start-up characteristic—even radios of the same make and model. This "FingerPrint" can be captured, stored and analyzed. Our exclusive TxID Software and the patented technology of the TxID-1 IBM/Compatible circuit board can help you identify the abusers on your repeater! Or help you keep track of the number of radios per account on commercial repeaters. CTCSS and DTMF decoding, as well as Spectrum Occupancy and Deviation measurement features further enhance the system.

Call or write for a brochure with full details, additional examples, and technical specifications.

TxID-1 with Software \$699.00

Shipping/Handling UPS Ground USA: \$8.00

Visa/MC and AMEX accepted. COD on cash or Money Order basis only. Government Purchase Orders accepted.

Orders: (800) 338-9058

Info: (503) 687-2118 Fax: (503) 687-2492



TRIDE-NT \$669.00
1000KHz to 1.00GHz

Spectrum Analyzer System
Up to 500MHz Span. Two bands.

All the advantages of a Spectrum Analyzer at a very affordable price. Great for interference and signal hunting. RS232 connect for logging signals to disk. Real time display sweep outputs on any X,Y scope. Variable span and sweep rate. Marker function and selectable bandwidth. Demos in AM/NFM/WFM plus BFO for CW/SSB modes. Call toll free for more information.



1 800 445 7717

10707 E. 106th, Fishers, IN 46038
International: 317 842 7115 Fax 317 849 8794

CIRCLE 164 ON READER SERVICE CARD

\$40 Special To Charge You Up...

Periphex Power Packs for Longer QSO Time

replacements for

regular price

BP-85S ICOM 12v 800ma \$76.00

FNB-27 YAESU 12v 600ma \$60.00

EBP-22S ALINCO 12v 800ma \$65.00

PB-14S KENWOOD 12v 400ma \$60.00

Now Only \$40 Each



Buy your radio
from the manufacturer.
Buy the battery pack from Periphex—
where batteries are our only business!

- One Year Warranty
- Matched cell construction
- Case re-build service
- Long life, extended operating time

Add \$4.00 Shipping & Handling for first battery.
\$1.00 for each add'l battery - U.S. only
MA residents add 5% tax.

Available
from your
dealer...

PERIPHEx inc.

the only thing low about our charge is the cost...

1-800-634-8132

Periphex, Inc. • 300 Centre Street • Holbrook, MA 02343 • (617) 767-5516 • (617) 767-4599

CIRCLE 68 ON READER SERVICE CARD

73 Amateur Radio Today • March, 1995 53

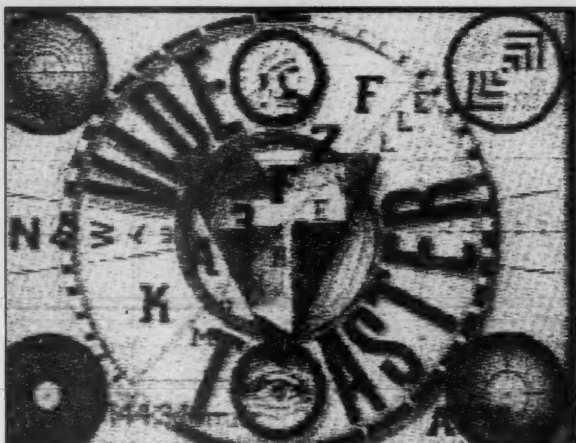
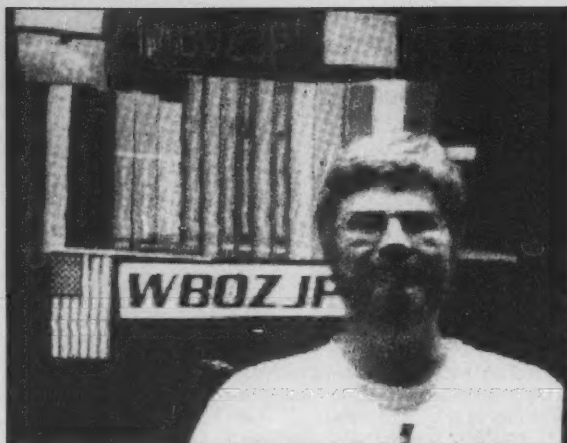


Photo B. This 594-mile contact, a new overland record, was made between Dave WB0ZJP in O'Fallon, Missouri, and Jim KA3FZF in Monroeville, Pennsylvania, during the height of the opening. (Photo by Tom WA8ZAH.)

sylvania. I was having fun working through the WA4GSS repeater in Huntington, West Virginia. It was great to watch the local ATV gang, sending pictures through a repeater over 200 miles away (round-trip distance of 400 miles). Just before midnight a front moved through the area and the band finally slammed shut! It had been quite an adventure and once everyone catches up on their sleep I'm sure they'll be looking forward to the next big DX adventure.

DX Hints

You don't need a super-station to work DX. Paying attention to a few details when building up your ATV shack will help you reel in the rare

ones. The number one key to success, in my opinion, is to put the most effort into your antenna and feedline. Sticking your antenna above the tree-tops and using a decent type of feedline (9913-type or hardline) will vastly improve your reception. Cheap hardline can be usually had for the asking at your local cable TV office. They have lots of surplus end runs that they'd love to have you take away. You can then use matching sections (ZD Engineering, 419-424-8765, makes an economical version) to transform the impedance to 50 ohms. In the Midwest, mount your antenna horizontal for most DX work.

One trend I've seen in areas that have ATV repeaters is the tendency

for newcomers to fix a low-gain antenna at the repeater. These stations will be left out in the cold during a band opening, seeing only the very strongest stations that happen to make it through the local repeater. It's well worth adding a rotator to your antenna, even if it's only the cheapest type available. In those areas with vertically polarized repeaters, one trick I've used with great success is to mount my antenna to a U-100 type rotator that actually flips the antenna sideways to change polarization. I now have the best of both worlds and can easily change from repeater reception to DX with the flip of one rotor control.


Also pay attention to large high pressure conditions with clear, still

nights and high humidity. The best conditions seem to occur during late evening and just before sunrise. I've seen some truly amazing openings occur at 3 a.m., but there's usually no one to work! I always check out the lower UHF commercial channels, if you see lots of new channels coming in strong, it's time to check out the ham TV band!

The large number of participants in this opening can be attributed to the holiday season (lots of ATVers home in their shacks) and to the use of a single ATV calling frequency on 2m (144.34 MHz). If you live in or near the Midwestern part of the country, give a listen to 144.34 and you might be in for a real surprise!

Sell your product in **73 Amateur Radio Today** Call Dan Harper today! 1-800-274-7373

Is Your Shack Grounded?

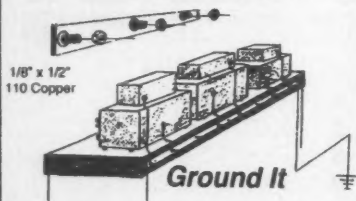

Solid Copper Buss Stainless Steel Hardware
Grounding Stud Every 6 Inches
Top or Back Installation

Ground all of your equipment chassis's to a single earth ground in one easy installation.
Money back guarantee, if not satisfied!

+\$.40 S/H each
Mail check/money order to:
J.M.S.
35 Hilltop Ave., Dept. 7
Stamford, CT 06907

2 ft.....\$11.95	Custom Lengths Available
3 ft.....\$16.95	
4 ft.....\$21.95	

J. Martin Systems

CIRCLE 26 ON READER SERVICE CARD

Subscribe to
73 Amateur Radio Today
Call 800-289-0388

BATTERIES

Nickel-Cadmium, Alkaline, Lithium,
Sealed Lead Acid For Radios, Computers,
Etc. And All Portable Equipment

**YOU NEED BATTERIES?
WE'VE GOT BATTERIES!**

CALL US FOR FREE CATALOG



E.H.YOST & CO.
7344 TETIVA RD.
SAUK CITY, WI 53583
(608) 643-3194
FAX 608-643-4439

CIRCLE 114 ON READER SERVICE CARD

DOWN EAST MICROWAVE

We are your number one source for 50 MHz to 10 GHz equipment.

Transverters & Down Converters;
Linear Amps; Low Noise Preamps;
Antennas & Accessories; Cable; Connectors;
Antenna Relays; Components

Write or Call for Catalog.

For All Equipment & Antennas:

DOWN EAST MICROWAVE, INC.

Steve Kastro, N2CEI
954, Route 519
Frenchtown, NJ 08825
(908) 996-3584
FAX: (908) 996-3702

For Antennas & Accessories:

DIRECTIVE SYSTEMS

Dave Olean, K1WHS
RR1, Box 282
W. Lebanon, ME 04027
(207) 658-7758


THE 4SOTRON
COMPACT ANTENNAS FROM 160-10 METERS

NO TUNERS
NO RADIALS
NO RESISTORS
NO COMPROMISE

**SIX EXCELLENT REVIEWS JUST
DON'T HAPPEN BY CHANCE
CALL US FOR A FREE CATALOG.**

*See review in Oct. 73, 1984 *Sept. 73, 1985 *March 73, 1986
CQ, Dec. 1988 Mar. W.R. 91 NOV. 73, 1994

BILAL COMPANY
137 Manchester Drive
Florissant, Colorado 80816
(719) 687-0650

CIRCLE 42 ON READER SERVICE CARD

Say You Saw It In 73 Amateur Radio Today

WANT TO LEARN CODE?

**Morse Tutor Gold is the answer for the
quickest and easiest way
for beginners and experts alike.**

From the moment you start the easy and speedy self loading procedure to the day you reach your goal, **Morse Tutor Gold** will gently coach you through the learning process.

Since 1987, GGTE has guided nearly 20,000 hams and prospective hams around the world through proven structured lessons and a variety of character, word and conversation drills. Straight forward menus make the process simple and fun.

You select the characters and **Morse Tutor Gold** will prepare a random character drill with those characters. **Morse Tutor Gold** makes it easy to create your own drills or import text files. You can now type what you hear or copy by hand and see, one line at a time, what the computer sent or what you typed. Pick the Farnsworth or the standard method; select the tone frequency most comfortable for you or select your code speed in tenths of a word per minute.

You are always in command.

Morse Tutor Gold uses your internal speaker or sound board (certified by Creative Labs for all Sound Blaster products). And, if you use a sound board the program supports volume control.

Get the software the ARRL sells and uses to create practice and test tapes. **Morse Tutor Gold** is approved for VE exams at all levels.

Attention Morse Tutor and Morse Tutor Advanced Edition registered users.
Make sure we have your current address.
Special upgrade offers will be mailed shortly.
Don't miss out

"Bought it on Friday-passed my 5 words on Sunday".
A Peters "Great program-does all it was said to-it was loaded and in use within 15 minutes of its arrival. Truly user friendly." KDSMYL "Better than my wildest expectations! Sorry I didn't have it years ago. It is much better than any code tapes." KBSHNR "By far the best Morse Code program I have ever seen! I'm an ARRL VE." KFSBY "This is a crackerjack way for this newcomer to learn the Morse Code. Well worth the price." W.B. Marks

For all DOS computers. Available thru dealers, 73 Magazine, QST, or send \$29.95 + \$3 S&H (CA residents add 7.75% tax) to:
GGTE, P.O. Box 3405, Dept. MS,
Newport Beach, CA 92659
Specify 5 1/4 or 3 1/2 inch disk

Morse Tutor Gold is a trademark of GGTE.
Sound Blaster, the Sound Blaster Logo and the Sound Blaster Compatibility Logo are trademarks of Creative Technology Ltd.

CIRCLE 193 ON READER SERVICE CARD



CABLE X-PERTS, INC.

COAX	100FT/UP 500FT	ROTOR CABLE	100FT/UP 500FT
FLEXIBLE 9913 LOW LOSS		5971 8/COND (2/18 6/22) for runs up to: 125ft	
UV RES DIRECT BURIAL JACKET.....	.65/FT .63/FT	BLK UV RES JKT.....	.22/FT .20/FT
9913 EQUAL LOW LOSS		4090 8/COND (2/16 6/20) for runs up to: 200ft	
UV RESISTANT JACKET.....	.50/FT .48/FT	BLK UV RES JKT.....	.38/FT .36/FT
RG213/U MIL-SPEC BRAID		1418 8/COND (2/14 6/18) for runs up to: 300ft	
UV RES DIRECT BURIAL JACKET.....	.36/FT .34/FT	BLK UV RES JKT.....	.50/FT .48/FT
RG8/U FOAM 95% BRAID		18GA TINNED COPPER 4/CONDUCTORS	
UV RESISTANT JACKET.....	.34/FT .32/FT	GRAY PVC JACKET.....	.20/FT .18/FT
RG MINI 8X BLK, CLR, or		18GA TINNED COPPER 5/CONDUCTORS	
SILVER JACKET-UV RES.....	.18/FT .17/FT	GRAY PVC JACKET.....	.22/FT .20/FT
RG 58/U SOLID CENTER CONDUCTOR.....	.17/FT .16/FT	18GA TINNED COPPER 7/CONDUCTORS	
RG 58/U STRANDED CENTER CONDUCTOR.....	.19/FT .18/FT	GRAY PVC JACKET.....	.26/FT .24/FT
RG 142/U DBL SILVER BRD TEFLON.....	1.45/FT 1.43/FT		
RG 214/U DBL SILVER BRD IIA JACKET.....	1.80/FT 1.70/FT	BALUNS	PRICE
RG 11/U FOAM PE SOLID CONDUCTOR		W2AU 1:1 OR 4:1 1.8-40 MHZ	
95% BRAID.....	.48/FT .46/FT	TRANSFORMER TYPE.....	\$21.00/EA
450 OHM LADDER LINE		W2DU 1:1 1.8-30 MHZ CURRENT TYPE	
18GA SOLID CW COND.....	.14/FT .13/FT	DIPOLE OR BEAM.....	\$23.00/EA
450 OHM LADDER LINE		ORIGINAL GSRV KIT.....	\$25.00/EA
16GA STRANDED CW COPPER.....	.18/FT .17/FT	LADDER-LOC.....	\$11.95/EA
LMR 400 LOW LOSS CABLE			
(SIMILAR TO 9913).....	.62/FT .60/FT	D.C. POWER SUPPLIES	
LMR 600 LOW LOSS CABLE		6AMP W/LIGHTER PORT.....	\$29.95/EA
(SIMILAR TO 1/2" HARDLINE).....	1.47/FT 1.45/FT	11AMP W/BANANA PLUG TERMINALS.....	\$61.95/EA
LMR 900 LOW LOSS CABLE		14AMP W/BANANA PLUG TERMINALS.....	\$71.95/EA
(SIMILAR TO 5/8" HARDLINE).....	4.05/FT 4.00/FT	20AMP W/BANANA PLUG TERMINALS.....	\$88.95/EA
LMR 1200 LOW LOSS CABLE			
(SIMILAR TO 7/8" HARDLINE).....	4.55/FT 4.54/FT	WIRE	
		10GA 2/C "FLEXIBLE" OIL&GAS RESISTANT	
ANTENNA WIRE		RED/BLK "ZIP".....	.40/FT .38/FT
14GA 168 STR "SUPERFLEX" UNINSULATED.....	.16/FT .14/FT	12GA 2/C "FLEXIBLE" OIL&GAS RESISTANT	
14GA 7/22 "HARD DRAWN" BC UNINSULATED.....	.10/FT .08/FT	RED/BLK "ZIP".....	.30/FT .28/FT
14GA SOLID "COPPERWELD" UNINSULATED.....	.09/FT .07/FT	1" TINNED COPPER BRAID	
14GA SOLID "BARE COPPER" UNINSULATED.....	.09/FT .07/FT	25 FT \$22.00 50FT \$44.00 100FT \$85.00	
12GA 19/25 "BARE COPPER" UNINSULATED.....	.15/FT .13/FT	1/2" TINNED COPPER BRAID	
16GA 28/30 "BARE COPPER" PVC INSULATED.....	.09/FT .07/FT	25FT \$12.50 50FT \$25.00 100FT \$48.00	
14GA 41/30 "BARE COPPER" PVC INSULATED.....	.11/FT .09/FT	CONNECTORS	
12GA 65/30 "BARE COPPER" PVC INSULATED.....	.17/FT .15/FT	PL 259 SILVER/TEFLON/	
DACRON ROPE DBL BRD 3/16" 770# TEST.....	.12/FT .10/FT	GOLD TIP.....	10PKS \$11.0025PKS \$25.00
		N" CONNECTOR SILVER/TEFLON/	
		GOLD TIP.....	10PKS \$32.5025PKS \$75.00

We install our connectors
PL259 & "N" Connectors
Price: \$5.00/per termination
(+ connector cost)



ORDERS ONLY: 800-828-3340
TECH INFO: 708-506-1886 FAX: 708-506-1970
113 McHenry Rd., Suite 240, Buffalo Grove, IL 60089-1797

For
Complete
Literature
Mail SASE

AZDEN THE 6 METER FM LEADER

THE MAGIC BAND - SIX METERS. The best of both HF and VHF. Enjoy great DX during band openings and full repeater operation at other times.

BUILT TO MIL-STD-810 2 YEAR WARRANTY

SPECIFICATIONS	PCS-7500H	AZ-61
Frequencies: RX	46-54 MHz	46-54 MHz
TX	50-54 MHz	50-54 MHz
Power:	50/5 Watts	5/0.5 Watts
Sensitivity:	< 0.19 µV for 12 dB SINAD	< 0.16 µV for 12 dB SINAD
Memories:	20	40
Tones:	38	38
Keypad:	Backlit DTMF	Prog. and DTMF
DC Power:	+13.8 VDC @ 9 amps (typ)	+12 VDC @ 1.5 amps (typ) operates over +6 to +16 VDC

Size: 2"Hx5.5"Wx7.25"D 6.85"Hx2.6"Wx1.3"D

**TO PLACE ORDERS
CALL 1-800-643-7655**



PCS-7500H MOBILE



AZ-61 HANDHELD



147 New Hyde Park Rd., Franklin Sq., NY 11010
(516) 328-7501 FAX (516) 328-7506

CIRCLE 272 ON READER SERVICE CARD

HAMSATS

Number 13 on your Feedback card

Amateur Radio Via Satellites

Andy MacAllister WA5ZIB
14714 Knights Way Drive
Houston TX 77083

A New Russian Star

On December 26th of last year, RS-15 became our newest amateur radio satellite. Launch was from the Baikonur Cosmodrome, 1,200 miles southeast of Moscow, near Tyuratam, at 0300 UTC. The launcher was a three-stage "Rokot." The first two stages came from a modified SS-19 intercontinental ballistic missile, while the third stage was a new booster called "Briz." Rumors of the impending launch of RS-15 have been circulating for years. The long wait is over.

RS-15 carries a single Mode "A" transponder with the standard 2 meter uplink and 10 meter downlink. The uplink passband is from 145.858 to 145.898 MHz, while the downlink spans from 29.354 to 29.394 MHz. The transponder output power can be varied with a maximum output of 5 watts. There are two telemetry/message beacons on the craft, one on 29.352.5 MHz and the other on 29.398.7 MHz. Power output of the beacons can be set at 400 mW or 1.2 watts.

The satellite is spherical and just over a yard in diameter. The system is built on a structure similar to the popular RS-3 through RS-8 satellites. It weighs approximately 154 pounds and has no orientation or stabilization systems. Early observations indicated that it was spinning about 34 times per minute shortly after launch.

Who Built It

The radios and control circuitry for RS-15 were built by a group of radio amateurs in Kaluga, 112 miles southwest of Moscow, under the direction of veteran satellite designer Aleksander Papkov at the Tsiolkovskiy Museum for the History of Cosmonautics. Valentin Yamnikov at Nilakt Posto (Aero-cosmic Laboratory) in Moscow provided coordination for the effort.

Control of the spacecraft is implemented by the RS3A control station in Moscow, headed by Leonid Maksakov and sponsored by Unicom in Russia and UTC in Rhode Island. RS3A is also the control station for RS-10/11 and RS-12/13. Reports and comments

can be sent to RS3A at P.O. Box 59, Moscow 105122, Russia. They also have the packet address of RS3A @ RS3A.MSK.RUS.EU and the Internet address of regroup@olymp.msk.su. If all else fails, use the FAX with appropriate prefix: 7-095-916-2949.

A Tall Orbit

Although RS-15 has an orbit that classifies it as LEO (Low Earth Orbit), this satellite is the highest operational hamsat of its type. The MIR space station flies at just under 250 miles. DOVE-Oscar-17 has twice the height at almost 500 miles. The other RS systems, RS-10/11 and RS-12/13, orbit near 620 miles but RS-15 tops them all with a mostly circular orbit near 1,250 miles. KITSAT-Oscar-23 is the next highest LEO hamsat at 815 miles.

RS-15's high altitude requires nearly 128 minutes per orbit. The MIR space station takes less than 90 minutes for one revolution.

Another feature of RS-15's orbit is the inclination. It is 65 degrees. A polar orbit is near 90 degrees, while an equatorial orbit is at zero.

The high altitude means more passes per day for a given location, more time per pass and the possibility for better DX. The 65-degree inclination changes the pattern of the orbits with respect to timing of passes and the path across the sky. Polar-orbit satellites travel from pole to pole. RS-15 may often track like a polar satellite until it reaches higher latitudes when it begins an apparent curve.

RS-15 is not in a sun-synchronous orbit. This means that it does not come by at the same time each day. Over a period of weeks orbits over a given location will occur a few hours earlier. For satellite users the situation is not bad since RS-15 is in view for many passes each day.

Telemetry

Those monitoring the CW telemetry beacon on RS-10/15 during the first weeks after launch were treated to the following message: CQ CQ CQ DE RS15 AND RS3X MERRY CHRJSTMAS AND A HAPPY NEW YEAR. The spelling may have been a bit off, but the message was clear and the results de-

lightful. RS-15 would provide new opportunities for satellite enthusiasts and was an excellent Christmas present.

Along with the message, telemetry can be heard. The basic format is 16 groups of letters and numbers. A typical line of four groups might copy as: IIR43 INW13 IAR45 IMW45. Each group is composed of three letters and two numbers. The separator "RS15" is sent at the beginning of each set of 16 groups.

Decoding details were not available in the first few weeks after launch, but when available can provide important data for those interested in monitoring the satellite's health.

Many parameters are measured, including power output, temperatures of various modules and voltage/current levels at important points in the system. The letters in each group usually signify the status of a system, while the numbers provide a related measurement. Simple equations are used to convert from the two-digit value to degrees C, volts, amps or watts.

Some European observers have heard transmissions that sounded like high-speed data. These transmissions from the satellite have not been at regular intervals and are likely activated by the ground command station RS3A.

Early Activity

The first reports of signals from RS-15 came from Europe. Oscar DJ0MY monitored RS3A using CW and calling "CQ" in the transponder passband less than 12 hours after launch on December 26th. Oscar later made an SSB contact with a station in the Canary Islands.

U.S. contacts through the satellite were reported later between N2NRD and K6GZ. Others began hearing of activity through the new Russian hamsat and joined in to make contacts or study the orbit.

Those making contacts through RS-15 found that signals were not strong. The beacon on 29.352 MHz was much louder than signals in the passband. Observers were hopeful that the system was simply set for a low power setting on the transponder until check-out by ground controllers was complete.

As with almost all other new ham satellites, orbit determination was a guessing game. The best early element sets for RS-15 came from a ham and not NORAD. Ken N2WWD provided data for tracking programs that gave better signal acquisition and loss predictions than others.

Several sets of NORAD data were

tested and posted to the Internet and amateur-radio CBBSSs. About a week after launch one ham observed that, "I have now received over 20 some sets of KEPS for RS-15 to date from everyone and his brother, and none of them are correct... What gives?"

After many fit tests a set of elements will be defined and identified as those of RS-15. They will then become a part of the orbital postings from AMSAT to the Internet and packet-radio network. It took many weeks to sort out RS-3 through RS-8 when they were launched together on one booster in December 1981.

Working RS-15

Two approaches can be taken for RS-15 work. The first is to treat it like the other current RS-series hamsats and use simple antennas and gear. The second is to consider it as a vehicle for low-earth orbit DX.

The typical setup for working RS-10 will do well for RS-15. Using a 2 meter system capable of about 100 watts ERP (effective radiated power) coupled with a 10 meter receive system employing a dipole or ground-plane antenna, contacts can be made with relative ease. Operating through the satellite when it is near the horizon though will be difficult. Some of those low, horizon-grazing passes or brief moments at the edge for a higher-elevation pass can yield great DX for the properly equipped.

To put together a Mode "A" DX station, better antennas and some height are needed to get the most from RS-15. A good view of the horizon is necessary. A good DX station will have a three-element, 10 meter yagi at 30 feet or higher with at least a seven-element, 2 meter yagi just above it. A quiet 10 meter preamp and quality feedline also help.

To pursue DX via RS-15 the orbits must be studied. Passes should be checked from both the home location and the DX area of interest. Sometimes slightly sub-horizon passes can provide surprising results if conditions are right. Avid DX chasers may not even bother with elevation rotators.

Whether you put together the ultimate Mode "A" station, or just try your hand at casual contacts via the new satellite, it will be worth it. RS-15 provides another "easy-sat" for newcomers and more opportunities for fun contacts and serious satellite study for long-time enthusiasts.

Congratulations to the RS-15 crew in Russia and thanks for the Christmas present.

PAY TV AND SATELLITE DESCRAMBLING

All New Info VOLUME 5 All New Info

Volume 5—

Our entire collection of all current cable satellite and wireless turn-ons

• Pay TV Volumes 1-5 Satellite and DBS Handbook

(all different, Vol. 1 bonus) (includes Hacker Info)

• Wireless Cable Hacking • Hacker Video

• Complete Wizard (VCR) • Cellular Phone Hacking

\$15.95 each or \$93.95 or \$562.95

Newletter \$29.95/12 issues. Catalog \$1. All our info \$129.95 (includes sub)

SCRAMBLING NEWS

3494 Delaware Ave., Buffalo, NY 14217-1230

Voice/FAX 716.874.2088 BBS 716.871.1915

CIRCLE 36 ON READER SERVICE CARD

CornerBeam?

SWR < 1.2:1 across the band

Gain of a 15 ft Yagi

No dimension over 7 ft

40 dB Front-to-Back Ratio

60" Half-power Beamwidth

Mounts directly to mast

Vertical or Horizontal Polarization

2meters \$145, 220 MHz \$145, 70 cm \$115, Dual 146/440 \$165

Weights only 10 lbs. Add \$11 Shipping & Handling. Info \$1.

Antennas West

Box 50062 Provo UT 84605

Order Hotline

801.373.8425

CIRCLE 380 ON READER SERVICE CARD

THIS MONTH'S GOODIE FROM THE CANDY STORE

RDO KENWOOD TH-79A

Under \$420.00

Similar Savings on AEA, Icom, Astron, Yaesu, Kenwood, Alinco, Etc. All I.T.O.

KENWOOD KPS-21 \$100.00

KENWOOD TM-255A \$990.00

Over 8800 Ham Items in Stock, all Prices, Cash FOB Preston.

More Specials in HAM-ADS Looking For Something Not Listed?

Call or Write

Call Today (208) 852-0830

ROSS DISTRIBUTING COMPANY

78 S. State Street, Preston, ID 83263

Hours Tue.-Fri. 9-6 9-2 Mondays. Closed Sat. & Sun.

HF for only \$549

HOW IT ALL STARTED

We wanted to offer the most affordable HF rig in the industry and still provide real performance for even the most experienced ham. In recent years, many hams requested a "back to basics" transceiver that was simple to use. We reviewed all the latest design techniques, selected the best concepts from the 20 rigs we designed over these 25 years and asked 500 hams across the country for their ideas.

WE CALL IT THE SCOUT

Every feature can be mastered in minutes. No modern rig is as easy to use. It only takes a second to change bands. Plug-in modules are available for 160-10 meters including WARC. Single conversion and crystal mixing are the foundation of this 90 dB dynamic range receiver. That's the strong signal performance of rigs costing 3 times as much! It's sensitive and receive audio is sparkling clean with less than 2% distortion. The ideal selectivity for every band condition is at the touch of a knob. This patented "Jones" filter provides variable I-F bandwidth from 500 Hz to 2.5 KHz.

HERE'S HOW IT'S USED

MOBILE

Hams complain about today's cars having precious little space for gear. The SCOUT is the smallest HF rig in the industry (excluding QRP) measuring only 2.5" x 7.25" x 9.75" and runs directly

off the 12 VDC car battery. If the SCOUT won't fit your car, nothing will. The optional noise blanker reduces ignition noise from both your car and the one that just drove by.

PORTABLE

Business travelers and vacationing hams typically set up a briefcase or small



travel bag to include the 5 lb SCOUT, wire or whip antenna and lightweight power supply like our Model 938 switcher (its only 3 lbs!). It is surprising how many hikers and cyclists take along their SCOUT using some clever battery arrangement.

NEW HAMS

The SCOUT is the most economical way to get started in ham radio. Consider the choice a new ham must make just to test his interest in HF: (1) Spend nearly \$1000 or more on a new rig, (2) buy a used radio and take a chance on its

condition, or (3) invest in a SCOUT at \$549 with a one year factory warranty and our legendary TEN-TEC support.

OLD TIMERS

Operators with years of experience and a shack full of expensive HF gear also buy the SCOUT. It's refreshing to many who say "It takes 5 minutes to learn and without all the complicated features, there is only one thing to do with a SCOUT, work someone!"

Experienced hams call us constantly to report "I can't believe this receiver, it outperforms my \$1400 synthesized rig".

CALL TODAY:
1-800-833-7373
(U.S. & Canada)

Call Ten-Tec from 9:00 AM to 5:30 PM Eastern time, Monday through Friday for more information or to order. You can reach our repair department at 615-428-0364 from 8:00 AM to 4:00 PM. You can also FAX at 615-428-4483 or write us at 1185 Dolly Parton Parkway, Sevierville, TN 37862.

ATTENTION QRP ENTHUSIASTS

The SCOUT has a little brother, the ARGO 556. It is identical to the SCOUT without the 50 watt final, adjustable 1-5 watts output. TX-2 Amps, RX-.6 Amps.

Only \$489*

TEN-TEC
© 1994 Ten-Tec, Inc.

**MADE IN
USA**

Introducing **TKits**
A new division of Ten-Tec
Call 615-453-7172
to request your
kit catalog

- "SYNCHRO-LOCK" software keeps VFO virtually drift free regardless of temperature variation.
- SSB and CW 50 Watts Output Adjustable To 5 Watts
- Runs Off 12-14 VDC, TX -10 Amps, RX -.6 Amps
- Receive Offset Tuning
- Built-in Iambic Keyer with Legendary QSK. Speed adjustable on front and shown in display.

\$549* Includes one band module of your choice

\$29* Each additional band module

SCOUT ACCESSORIES:

MODEL		PRICE*
296	Mobile Bracket	\$15.00
297	Noise Blanker	\$19.50
937	11 Amp Power Supply	\$79.00
938	Tiny Switching Supply (Only 3 lbs.!)	\$95.00
700C	Hand Mike	\$39.95
607	Weighted Key Paddle	\$39.00
291	Antenna Tuner	\$89.00

VISA, MC, DISCOVER

*Plus shipping and handling; call toll-free for charges.

CARR'S CORNER

Number 14 on your Feedback card

Joseph J. Carr K4IPV
P.O. Box 1099
Falls Church VA 22041

Some Ham-Type Products

Every now and then I like to take a look at some products that might interest readers of this column. I don't do it very often, but every now and then the urge strikes me. I don't look at transceivers and other major pieces of equipment that 73 has covered elsewhere anyway, but I do look at minor equipment and things of use to the workbench ham/hobbyist builder. This month we take a look at some of each class.

RF Shielded Boxes

At one time I loathed small RF electronic projects above about 75 meters because they were "too hard," but as I grew in confidence I learned a few things about RF construction (e.g. layout, grounding, shielding, etc.), and found that by following the rules, one can be as successful building RF stuff as at lower frequencies.

One problem that has always been something of a hassle, however, is the shielding that's required. One could learn layout and grounding, but shielding usually required a better box than I had. Most of the low-cost aluminum electronic hobbyist boxes on the market are OK for DC to the AM broadcast band, but as frequency climbs into the HF and VHF region problems begin to surface. What you thought

was shielded "ain't." If you've read this column or my feature articles over the years, you will recall that I caution RF constructors to use the kind of aluminum box with an overlapping flange of at least 0.25", and a good tight fit. Many hobbyist-grade boxes on the market just simply aren't good enough.

Enter SESCOM, Inc. (Dept. 73-JJC, 2100 Ward Drive, Henderson, NV 89015-4249; 702-565-3400; for voice orders only, 1-800-634-3457; for FAX orders only, 1-800-551-2749). SESCOM makes a line of cabinets, 19" racks, rack mount boxes and RF shielded boxes. Their catalog, "Constructor's Hardware for the '90s," has a lot of interesting items for radio and electronic hobbyist constructors. I was particularly taken by their line of RF shielded boxes. Why? Because it seems that RF projects are the main things I've built for the past five years.

Photo A shows one of the SESCOM RF shielded steel boxes in their SB-x line. Note that it uses the "finger" construction in order to get a good RF-tight fit between the lid and the body of the box. Note also that the box comes with some snap-in partitions for internal shielding between sections. The box body is punched to accept the tabs on these internal partitions, which can then be soldered in place for even better stability and shielding.

At first, I was a little concerned about the material the boxes are made

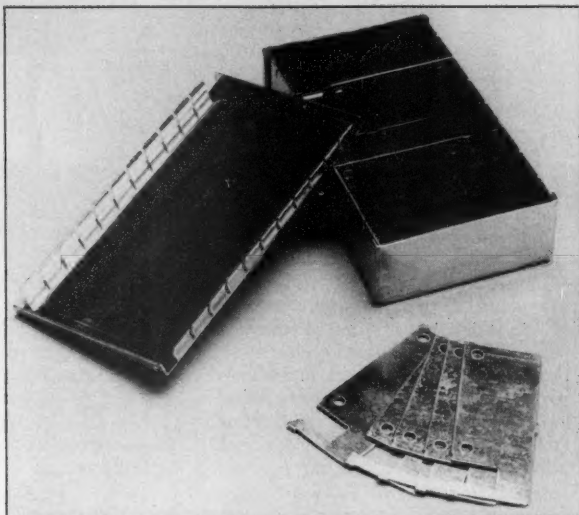


Photo A. SESCOM RF-tight hot tin plated steel boxes.

of—hot tin-plated steel. The tin plating makes soldering easy, but steel is hard on drill bits. I found, however, in experimenting with the SB-5 box supplied to me by SESCOM, that a good-quality set of drill bits had no difficulty making a hole. Sure, if you use old, dull drill bits, and lean on the drill like Attila the Hun, then you'll surely burn it out. But using a good-quality, sharp bit, and good workmanship practices making the hole, and there shouldn't be a real problem.

The boxes come in eleven sizes: 2.1" x 1.9" footprint to 6.4" x 2.7" footprint, with heights of 0.63", 1.0" or 1.1".

Prices range from \$4.50 to \$13.20

... which compare quite favorably with the prices of the better quality aluminum boxes that don't shield so well at RF frequencies.

SESCOM also makes chassis feed-through capacitors that can be used to carry DC power into the boxes, as well as control lines, low-frequency signals and so forth (in or out of the box). Two models are offered: FTS-1 is a 1000 pF/50 WVDC solder-in type (\$0.85 each), while FTSI-1 is a screw-in type of the same ratings (\$3.50 each). If you've priced screw-in feedthrough capacitors recently, you'll find out why they give them the fancy name "EMI filters" ... a \$6 price tag! The SESCOM prices are considerably bet-

Quality Microwave TV Antennas

WIRELESS CABLE • IFTS • MMDS • Amateur TV
Ultra High Gain 50db(+) • Tunable 1.9 to 2.7 GHz

- 55-Channel Dish System \$199.95
- 36-Channel Dish System \$149.95
- 20-Channel Dish System \$124.95
- Optional Commercial Grid Antenna (not shown) Add \$50.00
- Yagi Antennas, Components, Custom Tuning Available
- Call or write (6455) for "FREE" Catalog

PHILLIPS-TECH ELECTRONICS
P.O. Box 8533 • Scottsdale, AZ 85252
(602) 947-7700 (\$3.00 Credit all phone orders)
MasterCard • Visa • American Express • COD's • Quantity Pricing

Dish System
LIFETIME
WARRANTY

CIRCLE 249 ON READER SERVICE CARD

Next Day

Baraboo, Wisconsin
SALT COUNTY
KOZZ

Call Today & We Ship

	Next Day	2nd Day	ASAP
100	\$29.95	\$24.95	\$19.95
200	\$39.95	\$34.95	\$29.95
400	\$49.95	\$44.95	\$39.95
500	\$54.95	\$49.95	\$44.95
1000	\$99.95	\$89.95	\$79.95

All orders ship 2nd day air priority mail.
Free overnight air delivery add \$10.
Box 50062-S, Provo, UT 84605

Info 51
Antennas West
(801) 373-8425

CIRCLE 5 ON READER SERVICE CARD

ULTIMATE MODIFICATION BIBLE VOL. IV
NEW AND MORE COMPLETE!!!

OVER 800 MIKE WRITING CODES FOR CB AND HAM RADIOS.
OVER 400 CB POWER/AMPLIFICATION BOOST INSTRUCTIONS.
OVER 200 MOD. FOR CB PLLS.
OVER 175 MOD. FOR HAM RADIOS.
OVER 50 COMPLETE SYNTHESIZED CRYSTAL CHARTS WITH INSTRUCTIONS.
OVER 25 SCANNER MOD. AND TEN METER RADIO MOD.
OVER 25 PRECALCULATED MOD. CRYSTAL CHARTS.
LINER SCHEMATICS AND ANTICODX & GAINLOSS CHARTS.

KDC SOUND
17294 FM 3083
Conroe, TX 77302

Order Only: 1-800-256-9895
All Other Calls: 409-231-3753

\$29.95
MONEY ORDER, CDD
MCKINCY/ASA OR CK

CIRCLE 151 ON READER SERVICE CARD

Say You Saw It In 73 Amateur Radio Today

RF Shielded Steel Boxes

MODEL	L x W x H (in.)	\$
SB-1	2.1 x 1.9 x 1.0	4.50
SB-2	3.3 x 1.9 x 1.0	6.00
SB-3	4.2 x 1.9 x 1.0	9.00
SB-4	6.3 x 1.9 x 1.0	10.50
SB-5	3.3 x 2.7 x 1.1	9.50
SB-6	4.8 x 2.7 x 1.1	11.50
SB-7	6.4 x 2.7 x 1.1	13.20
SB-8	2.6 x 2.7 x .63	7.00
SB-9	3.2 x 2.7 x .63	8.25
SB-10	4.8 x 2.7 x .63	9.00
SB-11	6.3 x 2.7 x .63	10.75
FTS-1	1000pF/50VDC solder type	.85
FTSI-1	1000pF/50VDC screw-in type	3.50

• Lids can be soldered
• Hot tin-plated steel boxes with individual dividers
• Eliminates spillover of unwanted signals
• Feed thru capacitors also available

FREE EXPANDED 1985 CONSTRUCTOR'S CATALOG

PREPAID ORDERS SHIP GROUND FREE
(48 STATES, CANADA & MEXICO)
SESCOM, INC.
2100 WARD DR., HENDERSON, NV 89015 USA
USACANADA (800) 634-3457
FAX (800) 551-2749
(702) 565-3400 FAX (702) 565-4828
TECH LINE (702) 565-2993 M-Th 8 am to 4 pm (PST)

VISA
MasterCard
Discover

CIRCLE 167 ON READER SERVICE CARD

LOGIC 4
THE #1 HAM RADIO SOFTWARE SYSTEM

Technologically advanced!

The ultimate in power and flexibility! Complete logging, online awards tracking for any award, QSL management facility, radio interfacing, antenna rotor control, data terminal for all digital modes, unequalled packet spotting, contesting, CW keyer, sound card support, customizable screens and reports, superb documentation and support, grayline propagation chart, interface to callbook databases, and much more. Specs: IBM 386SX, 4mb RAM, hard drive. LOGIC 4 DOS \$79, Windows \$99. Logic Jr DOS \$39, Windows \$49. Foreign airmail \$10, visa/mc. Free Infopack! Also available: PDA QSL Route List, radio interface hardware, keyer interface hardware.

Personal Database Applications, Dept. 73,
2815 Meadow Ridge Dr., Duluth, GA 30133
Ph. 404-242-0887, Fax 404-449-8687 Tech
supp. 404-417-1899, 9-5 M-Th, 9-noon Fri.

Windows or DOS!

hambrew

FOR AMATEUR RADIO DESIGNERS AND BUILDERS

Quarterly
\$10/yr. NEW LOW PRICE!

BUILD IT-THEN OPERATE IT!

- HAMBREW Contests
- From Kits To RF Design • New Products
- Free Classified Ads To Subscribers
- Design Awards For Amateur Builders

\$15/yr. (Canada, Mexico) • \$21/yr. (Int'l.)
PO Box 260083 • Lakewood, CO 80226
VISA/MC only: 1-303-989-5642

CIRCLE 286 ON READER SERVICE CARD



Photo B. MFJ Voice Keyer.

ter, especially for a guy like me who buys them by the 10-lot or score-lot (that's 20 of 'em for you who think "score" means something else).

Voice Keyer

The literature that comes with the MFJ Enterprises, Inc. (P.O. Box 494, Mississippi State, MS 39762; voice 601-323-5869; FAX 601-323-6551; and, orders only, 1-800-647-1800) model MFJ-432 Voice Keyer (Photo B) asks: "Ever wondered what kind of tricks you could pull if you had a clone? . . . Now you can have a cloned voice with the new MFJ-432 Voice Keyer." With the Voice Keyer you can operate a long contest weekend without having your voice crack (instead of "CQ Contest . . ." you start sounding like "Ceeech koo context" after the first 12 hours). The Voice Keyer will store up to four messages of 20

seconds each. The messages are stored in an EEPROM, and will last up to 10 years without a back-up battery.

The Voice Keyer is inserted in the line between the microphone and the mike jack on your rig. Internal jumpers let you customize the Voice Keyer to your rig (Kenwood, Yaesu and ICOM configurations are supported).

The Voice Keyer costs \$99.95. It has a built-in speaker for monitoring the messages off-the-air, and a jack for remote control operation. It operates off a 9-volt battery (not included) or from 110 VAC with the MFJ-1312B adapter (\$12.95).

Morse Code Tutor

I know Wayne has bad-mouthed the code, but I'm a dyed-in-the-wool CW fan, and (although out of practice) got pretty good at it at one time. If you want to learn the code, either for an

FCC examination or for the pure heck-of-it, then the MFJ-411 Morse Tutor (Photo C) might be the "key to success" (I couldn't resist that pun, sorry). The MFJ-411 Morse Tutor allows you to learn code letters and numbers by association and relation, yet it also has a word recognition mode (nice for the current exam format). You can customize the sessions at speeds from 5 to 60 WPM, and with audio sidetones from 300 to 3,300 Hz. Either earphones or a built-in loudspeaker can be used. Like the Voice Keyer above, the MFJ-411 Morse Tutor will operate from 9 volts DC or 110 VAC with the same AC adapter.

New Books . . .

Recently I bought the latest *ARRL Handbook* and the *ARRL Antenna Book*. I believe that all hams should have a relatively recent *Handbook* available, so buy one every two or three years. Similarly with the *Antenna Book*. This year, the *Antenna Book* comes with a software disk that has some antenna software that runs on IBM-compatible computers. If you haven't seen these books, they're both winners. Contact "Uncle Wayne's Bookshelf" for details and prices . . . or see a local ham dealer. Note: If you have a technical book dealer in your area, most of them carry these books even though they are intended for amateurs . . . It seems that a lot of pros use them too.

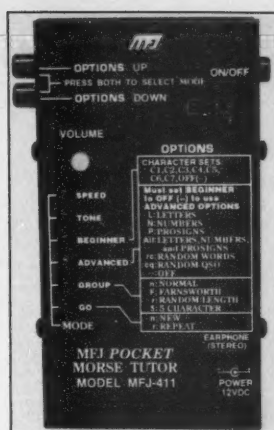


Photo C. MFJ Morse Tutor.

Every writer dreams of having their book come out as a movie. My tech books never come out as movies, but HighText Publications, Inc., who publishes my book *The Art of Science*, adapted material from the book and added a very powerful CD-ROM multimedia product. The new product, including a book and the CD-ROM, is called *A CrashCourse in Statistics*, and is available from booksellers at \$29.95, from Uncle Wayne's Bookshelf, or from HighText directly (125 North Acacia Avenue, Solana Beach, CA 92075).

NOT WEARING A SAFETY BELT CAN COST YOU AN ARM & A LEG.




It's against the law. So if you don't want a ticket, buckle up. Or, you could become broke in more ways than one.

YOU COULD LEARN A LOT FROM A DUMMY.®
BUCKLE YOUR SAFETY BELT.

Ad
LAWRENCE
U.S. Department of Transportation

AMATEUR TELEVISION

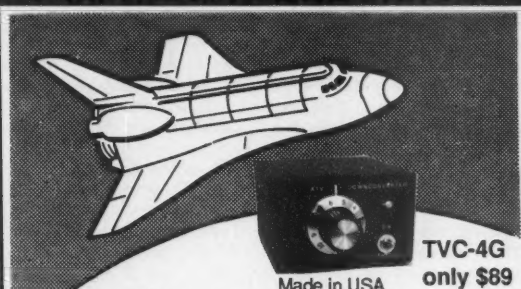

SEE THE SPACE SHUTTLE VIDEO

Many ATV repeaters and individuals are retransmitting Space Shuttle Video & Audio from their TVRO's tuned to Spacenet 2 transponder 9 or weather radar during significant storms, as well as home camcorder video. If it's being done in your area on 420 - check page 501 in the 94-95 ARRL Repeater Directory or call us, ATV repeaters are springing up all over - all you need is one of the TVC-4G ATV 420-450 MHz downconverters, add any TV set to ch 2, 3 or 4 and a 70 CM antenna (you can use your 435 Oscar antenna). We also have ATV downconverters, antennas, transmitters and amplifiers for the 400, 900 and 1200 MHz bands. In fact we are your one stop for all your ATV needs and info. We ship most items within 24 hours after you call. **Hams, call for our complete 10 page ATV catalogue.**

(818) 447-4565 m-f 8am-5:30pm pst. Visa, MC, COD
P.C. ELECTRONICS Tom (W6ORG)
2522 Paxson Ln Arcadia CA 91007 Maryann (WB6YSS)

RTTY LOOP

Number 15 on your Feedback card

Amateur Radio Teletype

Marc I. Leavey, M.D., WA3AJR
6 Jenny Lane
Baltimore MD 21208

Once again, I turn to you, the reader, for the seed of this month's column. I have told you before, your letters are read, your E-mail is digested! Here is the latest offering.

Subband Info for a New Ham

Don Young N2SLS of Cranford, New Jersey, drops me a line via America Online which says:

"As a relatively new ham, I've been interested in trying RTTY, packet and Pactor for their obvious communication advantages. Thus, I assembled VHF and HF packet systems via a KAM Plus and a Macintosh SE, running Hostmaster Mac purchased from Kantronics. The hardware seems to operate fine, and I've easily connected to a local packet BBS for DX clusters. However, the newness factor, combined with a shortage of time, has caused me to achieve little or no success on HF. The main stumbling blocks seem to be: locating the various subbands where these modes are located, and then distinguishing one mode from another to achieve a contact within a reasonable time (<1 hr). The latter seems to be strictly trial and error, and my ear hasn't yet grown accustomed to RTTY vs. AMTOR vs. packet vs. Pactor, etc. Could you provide more info on the subbands, and a source of info on how to distinguish various modes so I waste less time just tuning around and trying to figure out what I'm listening to?"

Well, Don, you ask some questions that many a new, or older, for that matter, ham has asked. Let's try to look at what you have posed, and see if we can't help others with the information, as well.

The station you have assembled is a good one. The newer multimode

controllers, such as the KAM Plus you have, do a fine job of decoding the various digital modes. In truth, having assembled the hardware, you have conquered the most challenging task facing the typical amateur.

Although the frequencies of packet communications are well established on VHF, with 145.01 MHz being one of the most common, things do not appear to be so well organized on the HF frequencies. Unless someone sends me a listing, my advice would be to scan around the RTTY neighborhood of the HF bands, particularly 3620 kHz on 80 meters and 14.080 MHz on 20 meters, and listen!

Listen for what? OK, as best as I can put this into print, it goes like this. Classic RTTY has a deedle-deedle-deedle continuous sound. Certain specific sequences, such as "CQ" or the standard "RYRY" test signal, have readily identifiable sounds, which you will recognize as you gain experience. AMTOR and Pactor have very similar sounds, since they are very similar systems, best described as brief pulses of RTTY-sounding signals. Packet is rougher, and almost sounds like tuned static, being sent in bursts. If you are lucky with these latter methods, you might hear the receiving station's signal acknowledging the sender, with brief response packets.

Now, this is, of necessity, a rough—very rough—description. While an experienced ear may be invaluable for identifying these signals, a little bit of hardware doesn't hurt, either. While I am not aware of whether or not the KAM can identify signal types, the AEA PK-232 does have a signal identification and acquisition mode, called SIAM, that can listen to and identify many different signal types. Once again, something tells me that if I am wrong, I'm going to hear about it!

On the other hand, many of you continue to look for that "ideal" pro-

gram to interface your multimode controller with your computer. To wit, I offer the following two items.

LAN-LINK

LAN-LINK version 2.32, the latest version of Joe Kasser's monumental terminal controller program for DOS-based computers has arrived, and boy, it is something!

LAN-LINK works with just about any controller, from the simple PK-88 to the latest PK-900 or DSP-2232. Its start-up modes are fully customizable, and its dBase-compatible logbook can serve as the source of station information or can be used to help control contact features. There is even a computer-based guide, ELMER, which uses artificial intelligence to help you through various tasks. With an assortment of 10 brag tape files available for each of six communications modes, operating digital modes with LAN-LINK may reach new heights of sophistication.

Various commands may be handled through menus, Alt-key combinations, or function keys. This allows a degree of personalization of the program rarely possible with most communications packages. There is full support for packet cluster, bulletin board, and other such techniques. The logbook is even operative as a contact checker for contest work.

As you can see, this newest version of LAN-LINK may be just the answer for the ham looking to operate a TNC or multimode controller from the DOS prompt. It is a significant update to previous versions, and its appearance on the scene is much appreciated.

PacketPet Lite for Windows

For those of you who prefer the Windows environment, Chuck Harrington has released a fully-functional version of his PacketPet Lite for Windows that is one sharp package, also!

Containing most of the features of the full commercial program, PacketPet Lite for Windows is a full-featured controller for most TNCs and multimode controllers, operating as a full-fledged Windows application. There is extensive help, provided as a standard Windows Help file, as well as context-

sensitive help with a mouse click, and detailed information for using COM ports in non-standard fashions, essential if your computer has "extra" devices, such as CD-ROM drives, scanners, or sound boards.

Chuck notes that PacketPet Lite requires some kind of hardware TNC, and will work with most of them! Host or KISS Modes are not required, and even the retail version of PeT, PacketPet For Windows, is able to implement its advanced features without resorting to the restrictions of Host Mode.

PacketPet can send and receive two types of graphics that are frequently seen on packet networks. The first graphic, sometimes known as a "brag," is a simple text file that contains characters of the IBM OEM character set arranged in such a manner as to appear to be a picture.

The second type of graphic that has recently started to appear is an ANSI Graphic. These are in color, and contain control codes to control text and background colors. Registration of the shareware program is required in order to enable the display of ANSI graphics.

Now, I wouldn't tease you about these two programs without providing a way for you to get them easily enough, so surely I have done just that. These two programs make up the nucleus of Disk #8 of the "RTTY Loop" Software Collection. I can't tell you at this writing what will fill out the disk, but I'm sure I'll find something of interest. Feel free to drop me a self-addressed, stamped envelope, or a piece of E-mail, for a listing of all that is available. Those of you who are anxious to get started can just send me the standard \$2 in US funds, a self-addressed stamped disk mailer for return, and a 3.5" disk, and I'll fill it and return it to you.

Otherwise, I look forward to your comments and questions every month. Send your missals to me at the above address for SnailMail, or on Email via CompuServe (75036,2501), Delphi (MarcWA3AJR), AOL (MarcWA3AJR), or Internet (MarcWA3AJR@aol.com). Next month, I think I might have an easy way to get on the air! No fooling!



PCBoards

PCB Art Made Easy!

"Create and Revise PCB Art in a Flash"

Layout Design software for DOS and Windows
Layout - Autoroute - Schematic

SUPPORTS ALL VIDEO MODES
LIBRARIES - GERBER OUTPUT
MAKE YOUR OWN FILMS WITH 1X LASER ART

Great for all printed circuit board projects!

PCBoards
2110 14th Ave. So.
Birmingham, AL 35205
ph. (800)473-7227 / BBS-Fax (205)933-2954

CIRCLE 263 ON READER SERVICE CARD

PCRC

PERSONAL COMPUTER REPEATER CONTROLLER

Speaks for Itself

- ✓ Full Duplex Autopatch
- ✓ 911 Emergency Access
- ✓ Reverse Autopatch
- ✓ Voice Mail
- ✓ Voice ID's
- ✓ Voice/Tone/DTMF Paging
- ✓ Links
- ✓ Hardware Logic I/O
- ✓ Morse Code Practice
- ✓ Toll Restriction
- ✓ BSR X10
- ✓ Scheduler
- ✓ Removable Courtesy Tones
- ✓ HF Remote Control
- ✓ Remote Base

PCRC/2 Combines the power of your XT/AT platform with a high quality play and record voice digitizer creating the ultimate repeater controller.

516-563-4715
Fax: 563-4716 BBS: 286-1518

from \$695

VISA MC

CIRCLE 196 ON READER SERVICE CARD

ONV SAFETY BELT CO.

P.O. Box 404 • Ramsey, NJ 07446

800-345-5634
Phone & FAX 201-327-2462

ONV Safety Belt With Seat Harness

\$89.95

OSHA
We Ship
Worldwide
Order Desk Open
7 Days/Week

ONV Tool Pouch \$15.95

Add \$4.00 For Handling VISA/MC CHECK

ONV Belt W/O Seat Harness

\$74.95

CIRCLE 102 ON READER SERVICE CARD

FREE CATALOG!

MCM Electronics . . . The Best in Electronics – Every Time!

Best in **service** with toll-free ordering and technical assistance. Orders shipped within 24-hours from two locations. Best product **selection** – with over 21,000 items. Best catalog – with hundreds of new items each issue plus an easy to use reference index for convenience. Just the best **value** in consumer repair electronics! For your free catalog mail this card today or –



Call Toll FREE:

1-800-543-4330

Distribution facilities in Dayton, OH and Reno NV to serve you better.

BUSINESS NAME _____ CITY _____
YOUR NAME _____ STATE _____ ZIP _____
ADDRESS _____ PHONE (____) _____

TYPE OF BUSINESS _____

73-05



NO POSTAGE
NECESSARY IF
MAILED IN
THE UNITED
STATES


BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO 4182 DAYTON OH

POSTAGE WILL BE PAID BY ADDRESSEE

MCM ELECTRONICS


650 CONGRESS PARK DR
DAYTON OH 45459-9954



A NO-RADIAL VERTICAL THAT COVERS 80 OR 75 METERS?

THERE'S ONE NOW!

No, we won't insult your intelligence by telling you that it's a "halfwave" or that ANY vertical will operate more efficiently without a good radial system than with one; it certainly won't! If you want expensive fairy tales talk to our competitors! If, however, you've no room for even the smallest radial system just install the most efficient multiband vertical in the business, the HF9V-X, over our counterpoise kit. You'll not only save a tidy sum but you'll work DX that the shorter and more lossy no-radial "halfwaves" can't touch because both the HF6V-X and HF9V-X use longer active element lengths for higher radiation resistance and greater efficiency on more bands than any of the so-called halfwaves. Ask for our free brochure for complete specs on all Butternut models and receive technical note DLS-1 "Dirty Little Secrets from the Antenna Designer's Notebook" that shows you how to calculate the probable efficiency of any vertical antenna using the manufacturer's own specs so you won't have to learn the truth the hard way!



NEW!

Model HF9V-X (shown to the left) for 80/75, 40, 30, 20, 17, 15, 12, 10 and 6 meters.

NEW!

Model CPX counterpoise kit for Butternut models HF9V-X, HF6V, and HF6V-X; substitutes for ground or elevated radials. Self-supporting tubing bolts onto base of antenna. Mast not provided.



BUTTERNUT ELECTRONICS CO.

P.O. Box 1234, Olmito, TX 78575 (210) 350-5711

Anyone (including you) can learn the Morse Code in one hour! Forget the No-Code License and get your Tech-Plus Ticket. Guarantee: You'll pass the 5 wpm code test with Uncle Wayne's system or YOU GET A 100% REFUND!

The truth is that no one using this new system has ever failed the 5 wpm code test. And it is highly unlikely that anyone ever will. We're talking about such a total no-brainer approach that many people are able to spend less than 15 minutes using this speed system before being able to ace the Novice-Technician code test.

Help your children, your wife and your friends get their ham licenses with this ultra-fast code system. Get your kids to help their friends to get their licenses. If we're going to try and keep our ham bands we need tens of thousands more hams. Millions will be even better.

Help start kids on their way toward high-tech careers by getting them hooked on hamming. The biggest obstacle to a ham license in the past has been the code. Now, with this new miracle system, this is just not even a minor problem. No longer will there be the slightest stress when taking that stupid code test that the ARRL Board of Directors has forced the FCC to continue to use as the primary method for keeping newcomers away from the hobby.

With the success of America in the next century dependent on our ability to provide high-tech career workers to deal with the information high-

way and the computerization of the workplace, amateur radio provides a fun way to get kids interested in learning about technology. It beats the heck out of Nintendo and Sega, which teach nothing. It even beats sports, which provide a good living for a handful of stars and disappointment and poverty for the losers.

We need to see radio clubs sprouting in our secondary and high schools again. We need to see hamming become a major activity in retirement homes and villages. We have room for millions of hams on our bands...of which we're using less than 0.2% today on any regular basis. Yep, that's right, 99.8% of our ham bands are just sitting there almost totally unused, with us waiting around for the FCC to sell them off and pocket the money without even a word of thanks.

How much are we charging for Uncle Wayne's One Hour Guaranteed Miracle Code Course? \$5.00 postpaid. That's right, it's only five bucks! Since our charge card minimum is \$7.50, maybe you should order some of Uncle Wayne's exciting adventure stories as advertised by Uncle Wayne's Bookshelf. Or send \$5.00 cash or check. This will be one of the better five bucks you'll ever spend. \$50 a dozen, if you like to spread joy.

1Hr. Code Course • Uncle Wayne's Bookshelf • Peterborough NH 03458-1107

Or call 603-924-0058 • Fax 603-924-9327

ALL ELECTRONICS

FAST SERVICE • DISCOUNT PRICES

7 Vdc MOTOR

Matsushita
MMX-7AC O 8A
1.25" diameter x 1.25" high
motor. Prepped with 1.61"
diameter flywheel, pulley
and fiberglass
mounting board.



CAT# DCM-54

\$1.00 each
100 for \$80.00

GREAT DEAL! SURFACE MOUNT SPEAKERS

These surface mount speakers were designed for use with car stereo, but they will work as well, or better as intercom or communications speakers in your home or workshop. 4", 4

ohm, speakers mounted in an unbreakable black plastic, slant-faced enclosure, they are rated 5 watts. Enclosure measures 4.82" X 4.5" X 2.45" h.



Each pair is boxed and includes two short pieces of hook-up wire. **\$3.75** per pair

CAT # SK-411

MINIATURE TOGGLE

D.P.D.T. (ON-ON)

ALCOSWITCH # MTM206NPC

Short bat handle, 0.25" long.


PC terminals.

CAT# MTS-82PC **\$1.25** each



25 for \$25.00 • 100 for \$90.00

9 VOLT 60 MA SOLAR PANEL



These 6" X 6" glass enclosed photovoltaic panels produce 9 Vdc at 60 ma. Ideal for charging batteries and powering small devices. Put two or more together for more current and voltage.

Includes hook-up instructions.

CAT # SPL-960 **\$5.25** each

ORDER TOLL FREE

1-800-826-5432

CHARGE ORDERS to Visa, Mastercard or Discover

TERMS: Minimum order \$10.00. Shipping and handling for the 48 continental U.S.A. \$4.00 per order. All orders including AK, HI, PR or Canada must pay full shipping. All orders delivered in CALIFORNIA must include local state sales tax. Quantities Limited. NO COD. Prices subject to change without notice.

CALL, WRITE or FAX for a FREE

64 Page

CATALOG

Outside the U.S.A. send \$2.00 postage.

MAIL ORDERS TO:
ALL ELECTRONICS CORPORATION

P.O. Box 567

Van Nuys, CA 91408

FAX (818)781-2653

CIRCLE 194 ON READER SERVICE CARD

Low Power Operation

Michael Bryce WB8VGE
2225 Mayflower NW
Massillon OH 44646

This month I have some rather unusual circuits for the QRP builder. Some are brand-new, while others are improved versions of old favorites.

Have you ever needed a minus supply for a project that runs from a battery? In the past, you could add a second battery, but that always proved to be a pooper. With projects running from an AC power source, generating a minus supply voltage was easier, but still required a center-tapped transformer. Here's a circuit that only requires two capacitors to generate a negative supply: the CPA7660S by Harris. Digi-Key carries this 8-pin DIP IC. It's about \$3 or so.

You input a positive voltage and you get a negative voltage out. It really is that simple. I've used a 555 timer running in astable mode and a voltage multiplier combination of zener diodes to generate a negative voltage in the past. But by using this chip, it's oh so easy. So, the next time you look at a CW filter requiring a negative supply, reach for a CPA7660S.

High-Side FET Driver

I've been using more and more power MOSFETs in my projects lately. From RF amplifiers to high-side switches, the power MOSFET is quite a device.

However, applications requiring high-side switching all require some sort of charge pump, and the associated components to turn the gate on and off. Again, as in the negative power supply, I've used everything from 555 timers to a section of a LM324 op

amp. They've all worked, but whoa! All those parts to do such a simple task.

Well the answer is again a special 8-pin DIP IC made by Linear Technology. It's called an LT. The LT is available from Digi-Key for about \$3, too. A surface-mount version is also available.

The LT has some very special features hiding inside. One is the overtemp shutdown. When this pin is pulled high, the output is pulled low and will stay that way until the overtemp is pulled low and then the chip resets. Normally, this pin is tied to ground.

The output of the charge pump should be connected to a high impedance load. It's very easy to load the charge pump down so its output nears the supply voltage.

Connected as shown in Figure 1, pulling the input lead high will cause the output to pop up to about 28 volts, depending on the supply voltage. The enable pin is normally held low, but you can tie the input to ground and use the enable pin as an inverted input. The status pin is normally not used. It's an open collector switch that will go low when the overtemp shutdown is active.

Unusual to this chip is the drain sense pin. By sensing the voltage drop across a resistor in the drain lead, you can come up with a clever over-current protection. You can even add a delay to this line so it will ignore sudden high current loads such as a cold light bulb turning on. If this pin is not used, tie it to the VCC pin, 8. What it used to take over 30 parts to do can now be done with one chip. Amazing!

Pulse Maker

Ever have a need for some good ol'

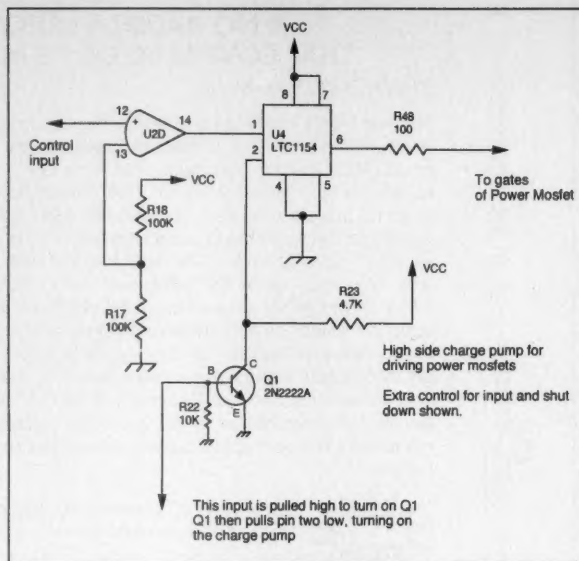


Figure 1. A high side MOSFET driver with control circuitry.

fashion' square waves? See Figure 2. Here is the notorious 555 timer IC put to good use. This circuit makes square waves that are very good, with nice rise and fall times. By changing the values of the two timing resistors, you can change the duty cycle of the oscillator. With the values shown, the duty cycle is about 50 percent. This is one of my favorite building-block circuits. It's great for testing digital circuits.

DVM

I've given several examples of expanded voltmeters in this column. However, here is a circuit that will display voltage digitally. (See Figure 3.) It uses two common ICs and a handful of parts. I would like to take the credit for this one, but I can't—Dick from S & S Engineering came up with it. I don't have a PC board layout for this circuit, but may work on one if there is

enough interest. Digi-Key carries all the parts you'll need. Assembly is best done on perf board, using point-to-point wiring.

Dayton '95

Yup! It's that time of year. Again, the town of Dayton, Ohio, will be over-run with QRPers. We'll again be staying at the Days Inn South.

What started out last year on a whim grew into a full-blown banquet on Saturday night. We had a huge turnout and gave away several rather slick door prizes. Nope, we're not talking a coffee mug or two, but MFJ QRP rigs, solar panels, assorted kits and other goodies.

Of course, there's the usual storytelling and those great DX catches to hear about. But, it's also a time to get to see some of the newest stuff coming down the road. Last year we saw


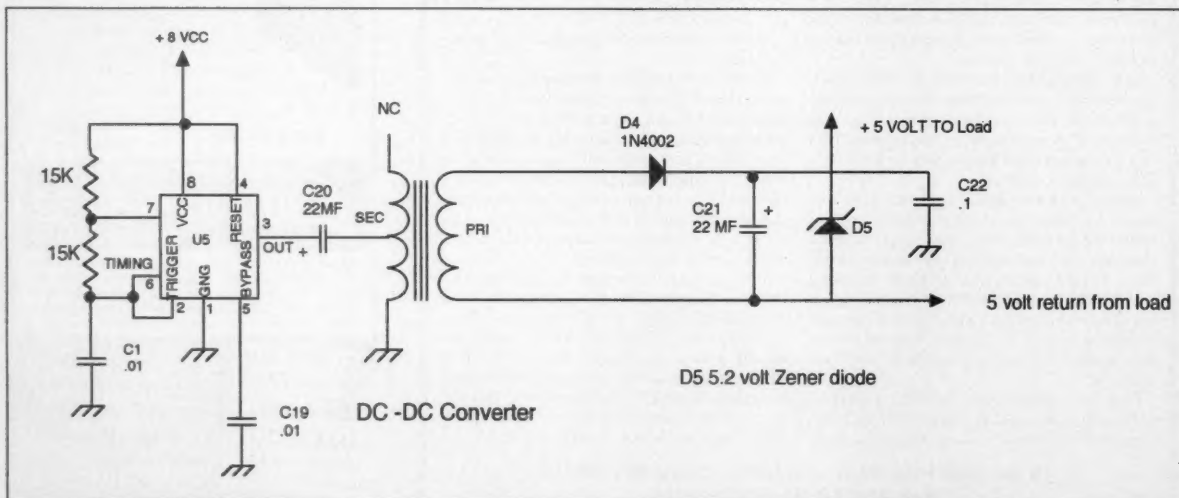


Figure 2. A DC to DC isolated power converter.

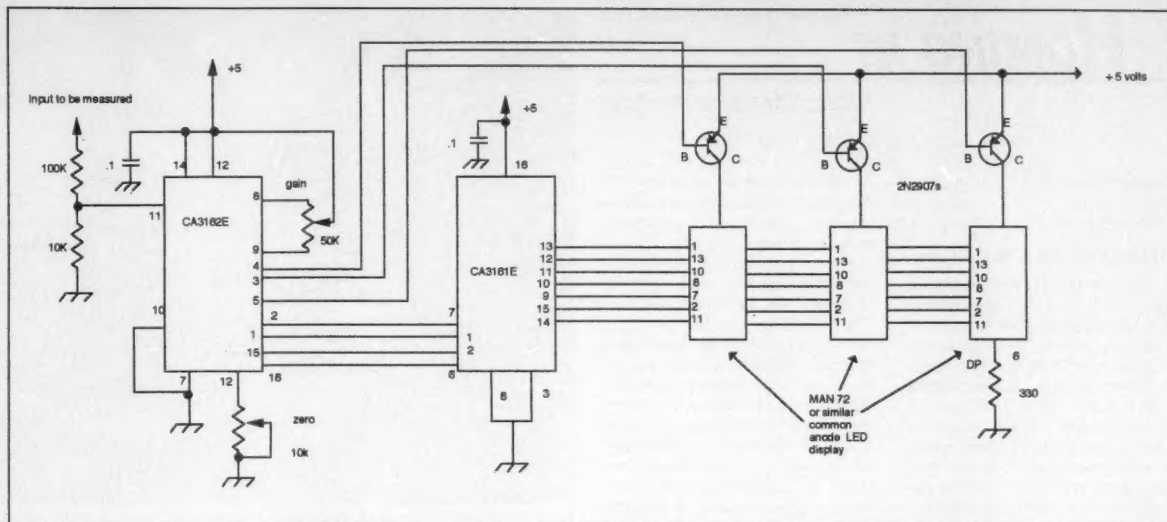

the ARK-4, the Norcal, the New England 40-40, and goodies from Radio Kit as well. This year there'll be even more!

We'll have forums and a sign-up booth inside the arena. QRP clubs

from Michigan QRP, G-QRP, QRP AR-CI, QRPP, New England, and more will be there signing up new members. It's a lot of fun, even though it has rained the last several years. I'll be there as usual, and perhaps give a

talk this year as well on QRP.

It's time to get going if you want to make the trip. Send a check for one night's stay, made out to the Days Inn, to Myron Kyole, 1101 Miles Ave. SW, Canton, Ohio, 44710. You can call

Myron at (216) 477-5717. Be sure to include an SASE when sending your check to Mryon. **DON'T WAIT!** Rooms went fast last year and there was a long waiting list for canceled rooms.


Tell our advertisers you saw their ad in 73 Amateur Radio Today!

50.388

ELECTRONIC COMPONENTS

**Whether you order 1 part or
all 50,388...MOUSER stocks
and...ships same day!!**

CALL...(800) 992-9943



**for your
FREE
CATALOG**

**2401 Hwy 287 N.
Mansfield, TX 76063**

MOUSER[®]
ELECTRONICS
Sales & Stocking Locations Nationwide

CIRCLE 64 ON READER SERVICE CARD

Weather Satellite Imagery



PCMCIA Convertible Capture Board

- ☒ Low power - PCMCIA type II
Use on your Laptop and Desktop
HF Marine, NOAA polar satellites, GOES satellites
Perfect for boat, vehicle, plane, or home

Full Function Software

- ☒ DOS and Windows
- ☒ Sea surface temperatures
- ☒ Coastline and Lat/Lon grids
- ☒ GOES animation
- ☒ Decodes WEFAX headers

The Best in PC
based
Weather Satellite
Imagery



OFS WeatherFAX, Phone/Fax [919] 897-4545
6404 Lakemont Court, Raleigh, NC 27612

SPY ON THE EARTH



Capture five breathtaking images of the Earth for fun or profit. Zoom in up to 20X. Send \$39 check or M.O. (\$45 add \$50 overseas) for our fantastic 12 diskette set of professional quality copyrighted programs (IBM type) that does satellite tracking, image acquisition, image processing, 3-D projections and more. Direct reception from the satellites guaranteed worldwide without a satellite dish. Schematics included for interface. For FREE information log-on to our bulletin board anytime at: (718) 740-3911.

VANGUARD Electronic Labs
Dept. A, 196-23 Jamaica Ave.
Hollis, NY 11423 Tel. 718-468-2720

SERIES MODE

Powerline surge protection

- ◆ **EFFECTIVE**-- required protection for interconnected or networked equipment
 - ◆ **RELIABLE**-- non-sacrificial design
 - ◆ **SAFE**-- Uses no MOVs
- Award winning Series Mode technology** eliminates the destructive energy of surge voltage and surge current!

Call or write for full details today. Ask about your ham operator/ club discount.

ZeroSurge Inc.

944 State Rt 12 Frenchtown NJ 08825
800-996-6696 FAX (908) 996-7773

CIRCLE 268 ON READER SERVICE CARD

HOMING IN

Number 17 on your Feedback card

Radio Direction Finding

Joe Moell P.E. K0OV
P.O. Box 2508
Fullerton CA 92633

Multiple Foxes = More Fun

"It's 'hide and seek' for kids of all ages, with radios!" That's a one-sentence explanation that passers-by often receive when they ask what's going on at the starting point of a hidden transmitter hunt. Of course, these radio direction finding (RDF) exercises, which are also called foxhunts or T-hunts, have more important purposes, too. They prepare us to track electromagnetic interference, bootleg stations, and even aircraft and vessels in distress. But mostly, we're out for the fun of it.

Until a few years ago, no one in my area considered having more than one hidden station per hunt. After a full evening of hunting one T, few teams were ready for more. But hunting capabilities vary. A fox that takes five hours for one team to find might take only two hours for another.

On a couple of occasions, a team that found the fox quickly would go away and put out its own transmitter for other early finders to track. Within months, some hiders were putting out one or more low-powered extra T's as optional targets for early finders.

To this day, some RDFers continue to scorn the idea of mobile multiple T-hunts. "If you can hide one transmit-

ter really well, that should be enough," they say. Others have come to like the challenge of trying to take bearings on several targets at a time.

For the Los Angeles area 2 meter Pathfinder Saturday night hunt last November, Byron KD6BCH and Lara KD6AYO Garrabrant padlocked five half-watt ammunition-can transmitters in various places within a two-mile circle in the city of Torrance. On/off timing of each was random. All were on the same frequency. Each generated its call sign identification in MCW and sent a distinctive audio tone pattern. Only one T's signal reached the starting point 32 miles away. It was atop some children's playground equipment in a hilltop park. The other four were in public areas such as schoolgrounds and horse trails.

Of the 13 teams that started, eight found all five foxes. Elapsed times ranged from four to seven hours. This monthly hunt is normally scored by odometer readings. In this case, the winning team was determined by the lowest total mileage from start to the last transmitter. They could be found in any order. For even greater difficulty, Byron could have required the transmitters to be found in numbered order.

Make A Weekend Of It

Southern California's famous All Day T-hunts now feature multiple foxes whenever the hiders so choose. As regular readers know, the "All Day" title is a misnomer; these hunts frequently last 24 to 36 hours. Hunters start from a hilltop in Rancho Palos Verdes at 10 a.m. Saturday, remembering that the boundaries include the entire continental USA, and that the record distance for a 2 meter hidden T is 344 air miles (Photo A). Lowest total mileage wins this hunt.

The apparent holder of the record for greatest number of T's hidden on an All Day hunt is Don Lewis KF6GQ, who has been a part of the Southern California RDF scene for over 20 years. On the weekend before last Halloween, he and his family, along with Mark Harris KD6LAJ, scattered nine emitters in the Holcomb Valley, all on the same frequency. This area is north of Big Bear Lake, at about 8,000 feet elevation, in the San Bernardino Mountains, about 90 miles from the starting point.

"The T's were all within about a 2-1/2 mile radius from our campground in the center of the valley," KF6GQ told me. "Four transmitters had KD6LAJ's call on their CW ID, numbered 1, 2, 3, and 4. In addition, there were five shirt-pocket size T's with my call on them, numbered 1, 2, 3, 5, and 17. We deliberately tried to make it as confusing as possible. That's why the numbers were similar and they sounded the same except for the CW IDs."

"Three KD6LAJ foxes ran about 2



Photo A. "No rules, boundaries, complaints, or clues" is the motto of many intrepid Southern California T-hunters. Magnetic door signs that have been designed by Cathy Livoni KD6CYG and procured by Peter Emster WA6TQQ. Several teams' vehicles now sport them, but it's too soon to tell if the number of pullovers by curious law enforcement officers has been reduced.

watts each on separate hillsides around the valley," Don continued. "They went on and off at exactly the same time. The one you could hear at the start ran into a long beam pointed southwest. The three T's antennas were pointed toward each other. Furthermore, each of the three was situated so you had to approach on its beam's backside, where the T's from across the valley would give stronger signals."

"At the beginning of the hunt, we told the hunters that no matter how many transmitters they tried to find they must be sure to find KD6LAJ #1, the only one they could hear at the start point, in order for their mileage to count. We would determine the winning team by mileage and total number of T's found."

"Because the three KD6LAJ foxes were synchronized, it drove everybody crazy. As soon as they would get close to one, they would have to go to the backside, with either a hill there or the back of the antenna—something to cause its signal to become much weaker."

"There were five teams that claimed afterwards to have found KD6LAJ's #1. But as it turned out, only two found it, because besides the real T #1, there was a decoy. The real antenna was down in a bush on the southwestern facing slope of a ridge line. To get to it, you had to come up the back side, over the top of the ridge and then down toward it. In plain sight on top of the ridge was a shiny antenna on a mast and what appeared to be a transmitter."

"Actually, this was a transceiver with the transmit light wired to work in reverse. It lit when it received the real T's signal. It was only about four feet from the real antenna. Hunters saw the light come on and the meter go up, and thought it was the real T. They should have checked it with their sniffers, but three teams just signed the

check-in sheet there and left. Two other teams were lucky because they got there at night, didn't see the dummy, and sniffed out the real T."

"It was funny because the next morning as they were driving home, some of the teams were talking on a repeater, describing what they had found. They suddenly realized they were talking about two different setups for KD6LAJ #1. We let them go on and on before we confessed to them. One other hunter didn't find out he was fooled until the next weekend."

"The fourth KD6LAJ transmitter was at our campground. It had different timing and had a very strong signal in the hills, so we could get the hunters into the campground and greet them at least once. The hunting teams worked really hard—the last one quit at 9:30 Sunday morning."

"My boys helped hide the five KF6GQ milliwatt-level transmitters. One was tied to a barbed wire fence. Another had an 'invisible' beam made of piano wire in a tree. Nobody found three of them, yet they were all copyable at the campground."

"One was atop a ridge on what we call 'The Road of a Thousand Forks.' As soon as you enter it off the main road, it splits. And each fork goes into another Y, and so on. To get to the right ridge, there was one fork with chunks of big rocks on the road. I suppose you could have gotten up that road with four-wheel drive. But if you went a half mile farther to the east, there was a real easy fork that went up and then across the ridge to where we hid a mini-T."

If One Is Good . . .

Imagine the RDF fun your club could have with a few low-power mini-T's like these! Unlike higher power transmitters that need large battery packs, foxes in the 3 to 30 milliwatt range can be smaller than a pack of cigarettes. They will run for days on



Photo B. Can you find the transmitter in this picture? The shirt-pocket T by Don Lewis KF6GQ is in a 3-3/4" x 2-3/8" x 1" plastic box with RCA phono jack for your antenna.

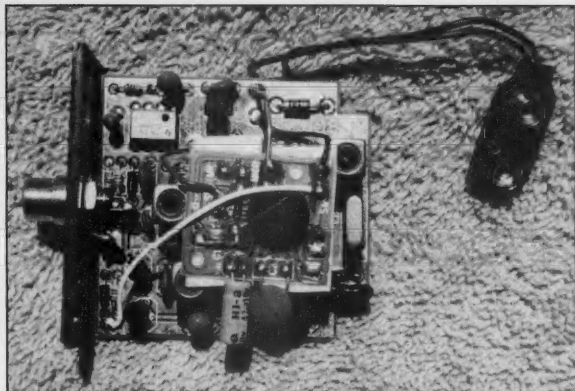


Photo C. A stamp-sized audio board sits atop the 2-1/8" x 2" RF board in the HT-101. There are about 30 components on the RF board.

throwaway alkaline batteries.

Put one or more mini-T's near the main fox at the end of your club's next T-hunt for added fun. Or scatter a bunch of them in the park during your club's next picnic, and encourage the kids and adults try to find them using just their handhelds.

Home-brewers can find information on how to build low-power foxes in my book.* For those who prefer to let someone else wield the soldering iron, KF6GQ is assembling and selling his shirt-pocket T's (Photo B). Don designed his HT-101 around the Motorola MC2833 FM Transmitter IC. His double-sided glass epoxy circuit board

includes a voltage regulator and CMOS 555 timer (Photo C). The oscillator is crystal-controlled at 1/12 the 2 meter output frequency.

Modulation comes from a second board with an analog storage IC. It holds 10 seconds of audio indefinitely, even when unpowered. Don programs the station ID in either MCW or computerized voice. Unfortunately, he did not design his unit to be easily field-programmable, but it is possible for users to change the audio message by feeding 5-millivolt audio into the sub-board and jumpering some pads on it.

You cannot get an accurate power

measurement on a milliwatt-level transmitter with an ordinary wattmeter. I hooked the HT-101 to a dummy load, viewed the output voltage waveform on a sensitive 275 MHz bandwidth oscilloscope, and computed power with Ohm's Law. KF6GQ promises 5 milliwatts minimum. I measured 9 mW on one I tested. It drew 33 milliamperes from a fresh 9-volt battery when transmitting, 560 microamperes when idle.

"I used tantalum capacitors for the on/off cycler, so I make no claims for timing accuracy," says KF6GQ. As supplied, the RF is on for six seconds and off for about 25 seconds. You can change the value of a fixed resistor to get other ratios.

With a typical 20% duty cycle, you should get about 36 hours operation before the battery dies. RF output voltage decreases in proportion to supply voltage. At 4.5 volts, power is down by a factor of four. The audio chip works normally down to about 4 volts. It is easy to tell when the battery voltage goes below that, because the audio pitch gets lower and the ID cycle stretches out.

The MC2833 IC has a very wide temperature range. When I sprayed Chemtronics Freeze-It directly on the chip, the HT-101 output power didn't budge. "When we hid in the mountains in October, it got so cold at night that my dog's four-inch-deep water bowl froze solid," says KF6GQ. "Two T's died, but it was because of the batteries, not the transmitter." Carbon-zinc batteries work poorly in the cold, so be

sure to use alkaline batteries under these conditions.

GQ Enterprize, Don's company, sells the HT-101 only as a wired/tested/programmed unit, not as a kit. The price is \$79.95, plus \$3.50 shipping/handling. It is crystallized and tuned for 146.565 MHz, a popular fox-hunt frequency in many cities. For another frequency, add \$10 and allow three weeks for procurement of your crystal. Checks should be made out to Don Lewis. Of course, here is the usual disclaimer: Neither I nor 73 Amateur Radio Today warrant this offer.

For more information on the HT-101, send a self-addressed stamped envelope to GQ Enterprize, Suite 524, 129 East Colorado Boulevard, Monrovia, CA 91016. (By the way, this return envelope courtesy is greatly appreciated when you write to 73's authors, too.)

Watch for reviews of other new fox-hunt transmitters in upcoming columns. Please let me know of any new RDF products you encounter. Tell me what you like and dislike about them. Write to my California address at the beginning of this column, or send electronic mail to me via the Internet (joemoell@cup.portal.com) or at CompuServe (75236,2165).

* Transmitter Hunting—Radio Direction Finding Simplified, a 323-page illustrated text on RDF by Joe Moell KØOV and Tom Curlee WB6UZZ (TAB/McGraw Hill #2704), is available from Uncle Wayne's Bookshelf.

OAK HILLS RESEARCH QRP Headquarters



QRP CLASSIC DUAL BAND TRANSCIVER KIT

- Dual band Transceiver kit for the 20M & 40M bands
- Superhet receiver design with diode ring mixer & RF pre-amp
- High side LO injection on both bands for a cleaner signal
- 4 pole crystal ladder filter
- 4 pole audio filter
- AGC circuit
- Vfo tuning with 8:1 vernier dial covering 100 KHz
- RIT w/center detent control providing ± 1 KHz of range
- Sidetone oscillator w/level control
- Silky smooth QSK circuit
- 4 - 5 watts of RF output on both bands
- Tx output power adjustable from 0 to full output
- Both lmbic and manual key jacks provided
- 12VDC operation — Current drain is 200mA on Rx and 1 A on TX
- Measures (HWD): 4" X 6 1/4" X 6 7/8" and weighs 48 oz.
- 100% complete kit — All coils are prewound
- All panels prepunched for optional lmbic keyer

NEW
LOWER
PRICE!



- Cat # CL2040\$219.95
- Cat # KEY1 Optional lmbic Keyer kit.....\$39.95



9AM to 6PM
Mon.-Fri.
EST.

OAK HILLS RESEARCH
20879 Madison Street
Big Rapids, MI 49307


Michigan
Residents
Add 6%
State Sales Tax

(616) 796-0920

Fax: (616) 796-6633


CIRCLE 82 ON READER SERVICE CARD

PCB / Schematic CAD - from \$195




EASY-PC - For single sided and multilayer boards to 17"x17". Phenomenally fast and easy to use. Over 18,000 copies in use worldwide.
EASY-PC Professional for boards up to 32" x 32" at .001" resolution, 16 layers. Schematic capture and netlist extraction - integrates seamlessly with PULSAR and ANALYSER III. Runs on PC/XT/AT/286/386/486 with EGA or VGA displays.

Logic Simulation - from \$195



PULSAR and **PULSAR Professional** - Full featured digital logic simulators. Allow you to test your designs quickly and inexpensively without the need for sophisticated test equipment. **PULSAR** can detect the equivalent of a picosecond glitch occurring once a week! Runs on PC/XT/AT/286/386/486 with EGA or VGA displays.

Analogue Simulation - from \$195



ANALYSER III and **ANALYSER III Pro**. Powerful linear circuit simulators have full graphical output, handle R's, L's, C's, Bipolar Transistors, FET's, Op-Amps, Tapped Transformers and Transmission Lines etc. Plots Input and Output Impedances, Gain, Phase and Group Delay. Covers 0.001 Hz to >10GHz. Runs on PC/XT/AT/286/386/486 with EGA or VGA displays.

For information write, fax or call:

Number One Systems

REF: 73, 1795 Granger Ave., Los Altos, CA94024

(415) 968 9306

VISA and MasterCard welcome.

CIRCLE 1 ON READER SERVICE CARD

ABOVE & BEYOND

Number 18 on your Feedback card

VHF and Above Operation

C. L. Houghton WB6IGP
San Diego Microwave Group
6345 Badger Lake Ave.
San Diego CA 92119

Surplus VHF Downconverter

This month I want to cover a simple 1240 MHz ATV converter that can be constructed out of a cable TV converter. These units are electronically tuned by a DC voltage rather than a mechanical adjustment. They are starting to show up on the surplus market both used and new. This unit can cover frequencies from low VHF to about 400 MHz, depending on the model you obtain. A used TV or VCR tuner is also suitable but I could not cover all the variations you might run into. What I am describing is a unit that we obtained and will make available; it should be similar in operation to other units and the conversions covered should be similar as well.

What sprouted this idea was of course, the prime mother load of all surplus material that was just sitting in front of Kerry N6IZW and myself. You don't look a gift horse or any other critter in the mouth before you take advantage of good fortune; we made arrangements to pick up the whole load. On close examination, these units, being new, would be suitable for many different RF amateur conversions. We knew that we would make good use of this material.

The first step in the conversion process was to draw a basic block diagram and determine the operating voltages required to put it in operation. See the system block diagram shown in Figure 1. (In this simple test circuit I used a bench supply of +20 volts and wired in a +5 volt regulator for the prescaler chip.) We used reverse engineering to develop this schematic. The specifications of the tuners are as follows. The tuning range of the convert-

er was from 50 MHz to just over 400 MHz. The primary IF output was TV channel 3 or 4. The tuning between TV channels was done electronically with a varactor diode to tune the voltage-controlled oscillator (VCO). This was accomplished in one range, 50 to 400 MHz, or 2 volts to 20 volts on the "VT" line. The output of the VCO feeds a mixer and a Toshiba frequency divider chip internal to the tuner. This divider chip allows the RF VCO frequency to be divided in frequency to a much lower frequency for RF readout on a counter or processor (PLL) control.

In the surplus lot of tuners that we picked up there were three different models. Under close examination the basic circuitry is all the same but minor changes exist within each one, making them somewhat unique. The major differences relate to the Toshiba divide-by chip. In model 113 the divide step is 256; in the 151 it is 64; and in the last unit, 333, it is 128. Knowing the divide-by ratio is only important when you want to know what the VCO frequency is.

For instance, if you have a control voltage of 9 volts on the (VT) voltage tune line this should represent a frequency of about 788 MHz, according to the VCO voltage/frequency chart in Table 1 (unmodified). By connecting a low-frequency counter to the prescaler (PS) pin this can be confirmed. All you need to know is the divide-by ratio of your tuner; so let's assume it's 256. In this case you would read with 9 volts on the VT line, a frequency of 3.078125 MHz. Of course the reverse is also true: Read the prescaled frequency and multiply to determine the LO frequency.

This PS output can be used with a low-frequency counter to set frequency or, if we get our act together, an upgrade in the form of a processor (PLL)

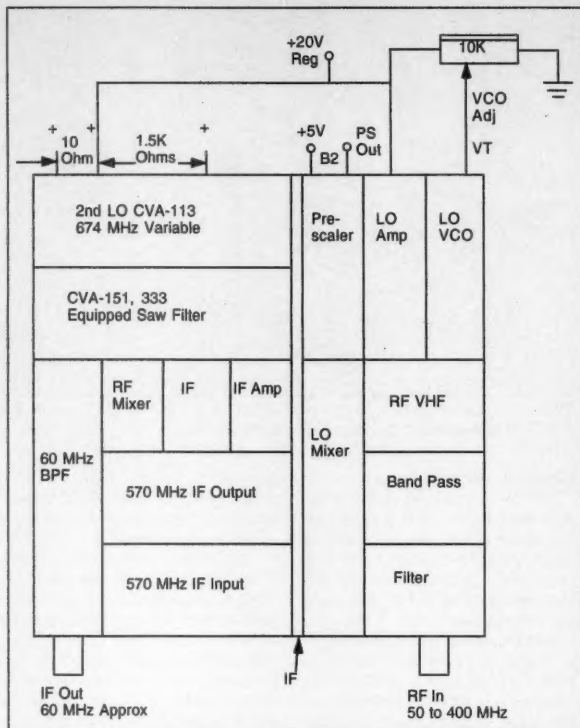


Figure 1. Block diagram of CATV-type downconverter.

controlling frequency to exactly the frequency we desire. We will update you on that circuit development next month. In the meantime let's get back to the rest of the tuner's circuitry. After the mixer we have an IF amp at 570 MHz, which feeds the second mixer. The second conversion oscillator runs at about 674 MHz and mixes the IF to about 60 MHz or TV Channel 3.

Conversion to 1240 MHz ATV

In the simplest of conversions, the local oscillator in the CATV tuner is used to supply the LO for an external mixer. We connected a surplus amplifier for RF amplification to complete

the converter package. There are several variations to this scenario; you just pick the variation that applies to your requirements. The reason for going to an external mixer is that the original CATV mixer works well with high level signals from a CATV line, something we don't have the luxury of having. The SRA-11 is a better mixer, giving lower conversion loss and more sensitivity to this system. See Figure 2.

For the RF amplifier for the system we found a unit that works well at 1240 MHz without modifications to its circuitry. The amplifier in question exhibits about 30 dB gain with a modest

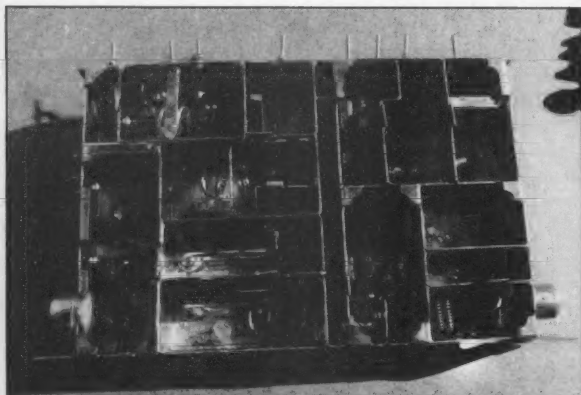


Photo A. CATV Model 151 tuner (second VCO adjustable); orientation of the coax connection at the bottom same as in the block diagram.

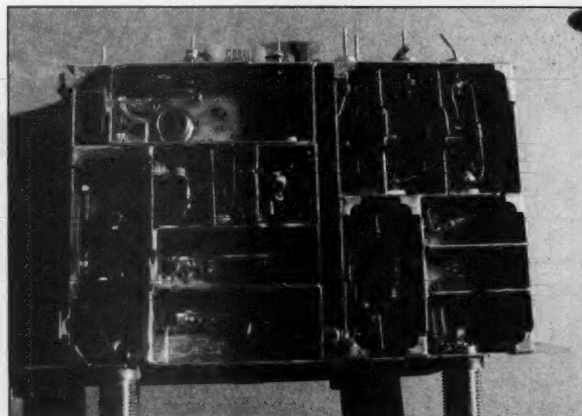


Photo B. CATV Model 113 tuner (second VCO uses SAW filter); orientation of the coax connection at the bottom bottom same as in the block diagram.

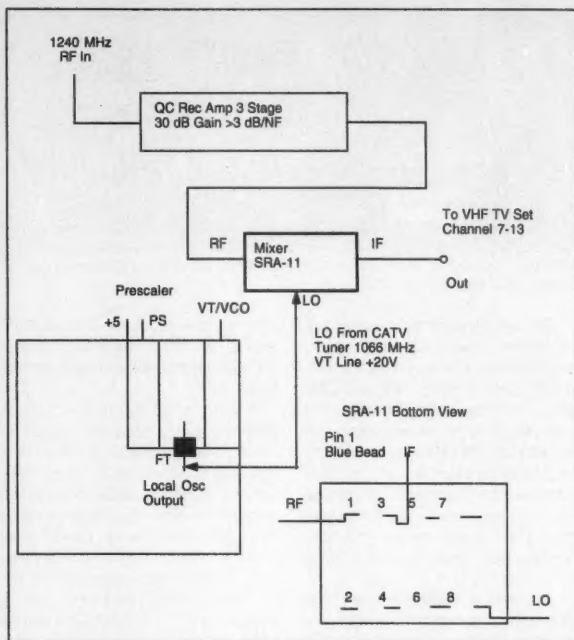


Figure 2. Diagram of 1240 MHz ATV converter using local oscillator (VCO) of CATV converter.

noise figure of about 2.5 dB. This amp is in fact a QUALCOMM IF amplifier that functions well as an RF amplifier. See Figure 3 for the gain vs. frequency operation of this amp. I have a quantity of these amplifiers and will make them available with the CATV tuners. Or you can roll your own amp and CATV tuner together to put this converter together.

Well folks, this is the basic project and it works well for ATV reception. The prototype construction by Art K6UQH proved out the basic concept. We would have gotten there ourselves but Art was motivated and did the modification. I was still drafting the schematic and mechanics of the project at that time. Initial tests in the San Diego area were made using the Mt. Palomar ATV repeater and the WA6VLF ATV repeater, with very good results.

Art placed his RF amp at the rear of a helical antenna. DC power was supplied up the coax for the amplifier. The remainder of the equipment was located at the TV receiver. This unit did use two RF amplifiers, a small preamp at the antenna and the Qualcomm amplifier, in addition to several bandpass filters to limit frequency response to 1200 MHz ATV.

First-Cut Modification

In the converter that Art K6UQH modified he used the VCO of the tuner and an external mixer coupled with the surplus receive IF amplifier serving as the RF amp. In the initial tests with this system Art was able to copy, from his QTH in Escondido, a video signal from the Mt. Palomar ATV repeater. Art used a workbench TV set on VHF Channel 7 for reception. Needless to

say this was a no-frills converter that was functional and inexpensive to duplicate—prime goals in any project; soft on the pocket.

Let's get into the meat and potatoes of this conversion and cover each aspect towards completion. There are several different twists and turns you might take in your own ATV converter's development. Basically, it all turns into the same conversion with different twists. The twists relate to the level of complexity you are willing to delve into as each add-on or development requires more circuitry.

Let's for starters assume the minimum circuitry for a functional 1240 MHz ATV receiver converter system. The local oscillator frequency for the simplest converter is the IF frequency minus the RF frequency. In this case we will use TV Channel 8, which is an IF frequency of 180 MHz. Full video occupies 180 MHz to 186 MHz, 6 MHz wide. Now, 180 MHz (IF) minus 1240 MHz (RF) = 1060 MHz (local oscillator frequency). On all of the tuner models this frequency can be derived by applying a regulated +20 volts to the "VT" line of the VCO. See Table 2.

The VCO output is tapped out with a small coax lead of RG-174 (mini coax cable) where the input of the VCO previously fed the mixer. (Disconnect the capacitor from the mixer center-tapped ferrite coil and tie the coax to the capacitor. This same coax cable now connects to the LO port of an external mixer.) SRA-11 mixers from Mini Circuits Labs have very good performance to 2000 MHz; we used one of these in the first prototype. The IF port of the SRA-11 mixer is terminated in a 3 dB pad that is used to feed the TV receiver via a

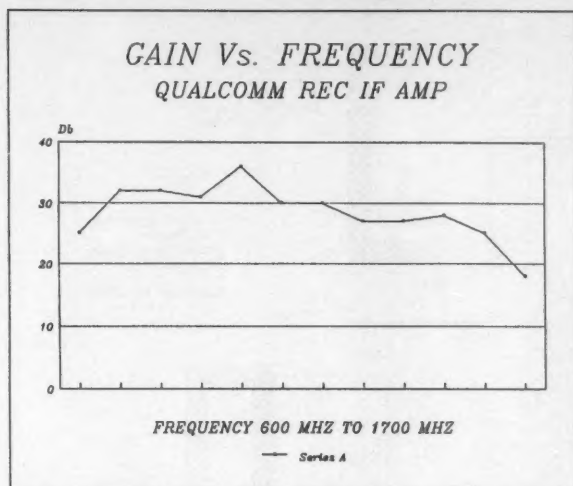


Figure 3. Gain vs. frequency of Qualcomm receive IF amplifier used as the RF amplifier. Operation from 600 to 1700 MHz with a noise figure of 2 dB.

coax to a 300 ohm balun; or by coax directly, depending on your TV set's configurations. The pad is used to provide the IF port with a good termination.

The TV receiver is set to Channel 8 to receive the 1240 MHz ATV signal. Use Table 1 for other frequency IFs to suit ATV requirements in your area, and adjust accordingly. The Qualcomm receiver IF amplifier is connected to the RF port of the mixer and serves as the new RF amplifier. This amp is hot out of the shute without modification. The amp has about 25 to

30 dB gain at 1240 MHz, with a noise figure of about 2.3 dB. It's not the ultimate but, as I said, it makes a very hot RF preamplifier for this receiver that is ready-made.

You say your ATV frequency is something other than 1240 MHz? Well, if it's higher in frequency, switch the TV set channel selector to a higher TV channel, say 10 or 13. Each channel number increment adds 6 MHz to the RF frequency of operation. Any instability of the VCO is taken care of by the TV AFT circuits. A filter should be used before the RF amplifier but a

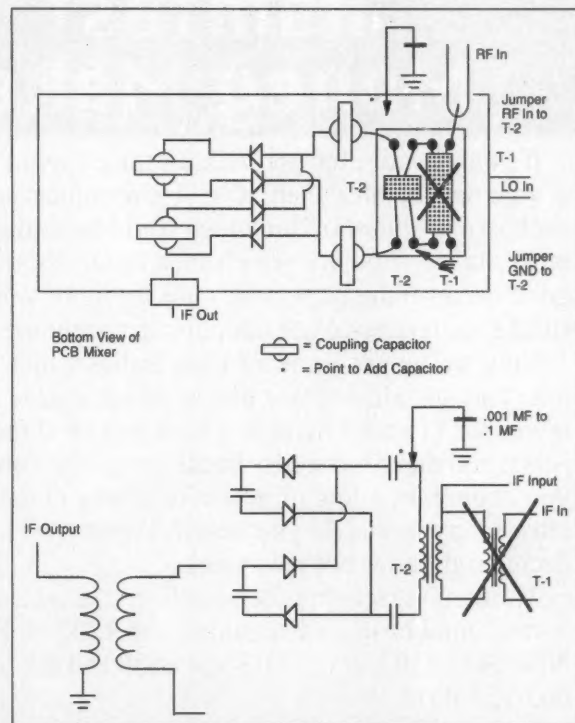


Figure 4. CATV mixer modification to reduce insertion loss.

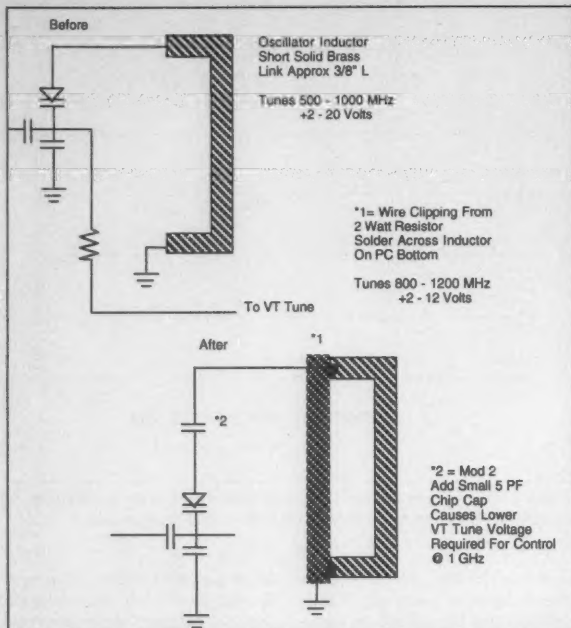


Figure 5. CATV Oscillator Modification to increase frequency of circuit and lower "VT" tune voltage for control of circuit from 12 volts vs. 20 volts unmodified.

"poor man's filter" could be the antenna. For best rejection to cellular and other services a filter is best. The filter should limit the input signals to just the 1200 MHz band before amplifying in

the wide bandwidth (600-1700 MHz) of the Qualcomm receiver IF amplifier. I won't get into filters here as you can find several designs in most any ARRL Handbook for 1296 MHz.

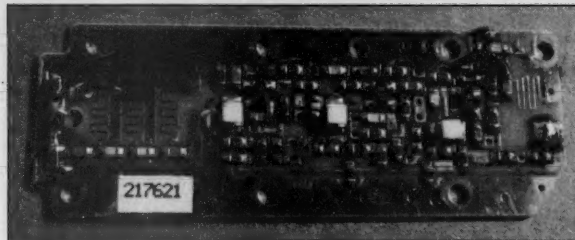


Photo C. Qualcomm IF amplifier, 600-1700 MHz, about 2.3 dB noise figure, 2" long by 3/4" wide.

The second modification, which will be covered next month, is to modify the VCO higher in frequency, allowing a lower control voltage "VT" with 1060 MHz. For those willing to follow this mod the rewards will be crystal-controlled PLL VCO stability. Before you enter this modification you need to know that the VCO stability is not critical, like trying to pick out a 5 kHz segment as you are tuning in 6 MHz video channel segments, making stability not a key parameter.

The VCO is modified in either case (PLL or manual control) to provide better higher frequency operation with a lower "VT" tune line voltage. See Figure 5. I placed a wire clipping (0.375" long) from a 2 watt resistor across the oscillator's tank circuit link inductor. This raised the minimum frequency from 600 to over 800 MHz with 2 volts on the VT line. The upper frequency limit was increased to about 1200

MHz at 12 volts on the VT line. This allows 1060 MHz to be obtained with a VT voltage of about +10 volts instead of +20 volts.

If a lower VT control voltage is needed in your application, lift one end of the varactor in the VCO and place a 5 pF cap in series with the diode. This reduces the higher capacitance of the varactor at lower VT voltages and allows 1060 MHz to be obtained at about 4 volts on the VT. In this case about 3 to 5 volts is required on the VT line and is suitable for PLL control applications. Additionally, the entire converter can be operated from a 12 volt power source. If you want to use the simpler manual control only, place the wire across the oscillator inductor and omit the varactor changes. See Figure 5 for oscillator modification details for +12 volt modifications.

The third option is to convert the input bandpass filter of the CATV tuner

Hamfest Money Maker

If you or your club are looking for a way to make money at your next hamfest, here it is! A few months ago we offered back issues of *Radio Fun* which could be sold at hamfests or other club events. We got cleaned out in short order. That's good because the back issues are far more valuable in ham shacks for reference use than in our warehouse.

Now we've got some 73 back issues which we've saved long enough. How'd you like to set up a table and sell back issues for \$1 each? Send \$50 for a box of 100 assorted back issues and make a fast fifty bucks profit. Two boxes could net you enough in a few minutes for a very nice new antenna. How many boxes do you need? These won't last long, so decide right now, not next week.

The hamfest season is coming fast, so send a check or credit card number to 73 Premiums, 70 R202 N, Peterborough NH 03458-1107, or call 603-924-0058 and ask for Sheila. Fax 603-924-8613.

Sell
Your Product In
73 Amateur Radio Today
Call Dan Harper
Today . . .
1-800-274-7373

SEEK YOU

A CD of songs about HAM RADIO

THE PRESS WROTE:

"I am here to tell you that the lyrics, the tunes, the arrangements and the musicianship knocked my socks off!"
Al Brodgon, QST magazine (Jan. '95)

"The songs were written and sung by Andrew & Lissa and they're good. Darned good!"

Wayne Green, 73 Amateur Radio Today, (Dec. '94)

THIS UNIQUE CD COSTS ONLY \$15
CASSETTE TAPE VERSION ONLY \$10
SHIPPING AND HANDLING \$3

To order just call 1-800-721-4077 TOLL FREE
BONNEVILLE MUSIC P.O. BOX 8521
MOSCOW, ID 83843 (VISA & MasterCard)

CIRCLE 45 ON READER SERVICE CARD

(varactor tuned from about 50 to 400 MHz) and connect it to the output of the mixer for a tuned output filter. This filter can be used to remove any unwanted products in the output IF path to the TV receiver as it covers the required tuning range of our new IF, from 174 to 216 MHz (that is, TV channels 7 to 13), that we use as our receiver IF.

If You Don't Have an SRA-11 Mixer

Not to worry, the mixer that is part of the tuner is a good mixer, but for our application requires some surgery to make it functional for our application. In the original CATV application conversion loss (about 25 dB) was not a priority due to the high-level signals being received. To amateurs this is undesirable; we need all the gain (or least loss) we can obtain. A simple modification will render the onboard mixer usable for our application, yielding a conversion loss on the mixer of about 10 dB.

To achieve this lower loss we need to remove the input ferrite transformer (T1) entirely. Just cut it off the PC board with an X-Acto knife. Leave the ferrite transformer (T2) that is center-tapped with a capacitor going through a feed-through in the case wall. This is the local oscillator input to the mixer. On the rear of the mixer PC board, the input coil that remains (T2) needs to have one side grounded. The other side connects to the IF input. These leads previously went to toroid T1 which is now removed; add two jumpers: ground on the right and the jumper to the IF input on the left. A

0.001 to 0.1 μ F capacitor needs to be added to one side of the mixer to complete the modification. The capacitor connects to the output of T1 at the coupling capacitor to ground. The capacitor value is not critical; 0.001 to 0.1 μ F will work well. See Figure 4 for exact placement. This spot is marked by an asterisk. This simple mixer modification improves the mixer conversion loss to about 10 dB at 1200 MHz.

Well, there you have it: the first cut at a 1240 MHz ATV converter. Of course, there are other possibilities as well for the CATV tuner. An ATV converter could be constructed for 450 MHz as well. To put these ideas into reality all I have to do is to set up some more antennas to allow all this testing. What I really need (as long as I am putting together a shopping list) is a small stepstair to the roof to provide access to an elevated test platform. On this platform there would be AC power and devices for antenna testing of projects such as this. Oh well, dream on.

As with any modification of circuitry there will always be questions on where exactly to make the connections. Don't be intimidated—dive in and give it a try. Go slowly and think each step through before cutting circuitry. Treat each circuit element as just that, not as a complete unit in one whole diagram. If you refer to the block diagram and photos provided in this article you shouldn't have any trouble.

To gain access to the internal components I used a pair of long-nosed pliers and straightened each of the

metal "ears" that hold the cover plates on. When all ears are straight, the covers should pop off easily without undue pressure. Follow the circuitry and look for obvious connections between compartments as only the DC and signal paths make connections between compartments. All other circuitry is contained within a compartment.

In Figure 1 where I placed labels (RF, IF, LO) by the mixers, these are the approximate PC board locations where the interconnections are actually made for these circuit elements.

DC	Freq.
0	566
1	582
2	601
3	630
4	658
5	685
6	711
7	738
8	763
9	788
10	812
11	844
12	866
13	898
14	926
15	954
16	979
17	1000
18	1023
19	1040
20	1061

Table 1. Frequency of VCO before modification. With Mod #1 (Figure 5) circuit will tune about 800 to 1200 MHz from +2 volts to +12 volts.

Well, that's it for this month. Next month I plan to complete the synthesizer and dive into a simply-constructed 1200 MHz antenna. I would like to develop a sweep driver to use the tuner as a spectrum analyzer, but for now that part will have to be put on hold. First, the ATV projects; then let's see what happens. By the way: The synthesizer we constructed uses a Motorola synthesizer chip, the MC-145106.

I will make the CATV tuners available. For those who wish to purchase a CATV tuner with a Qualcomm amplifier cost is \$25 postpaid. The CATV tuner or Qualcomm amps are available for \$15 each; for additional tuners or Qualcomm amplifiers add \$10 each. Units are surplus/brand-new. Prices are U.S./Canada postpaid.

As always, I will be glad to answer questions concerning this and other aspects of our upper frequencies. Please send an SASE for a prompt reply. 73, Chuck WB6IGP

Std. TV Channel	Frequency (MHz)
2	54-60
3	60-66
4	66-72
5	76-82
6	82-88
7	174-180
8	180-186
9	186-192
10	192-198
11	200-204
12	204-210
13	210-216

Table 2. TV frequency.

Sell your product in **73 Amateur Radio Today** Call Dan Harper today! 1-800-274-7373

Field Day Beam?

Took 10, 15, 20, and 40 meter HalfSquares on Field Day. They went up in the trees as easy as dipoles. A low G5RV took care of everything close and the HalfSquares made my ORP a big signal for the long hop east and west. On 10 and 15 I thought I had a conduit. Try a HalfSquare!

10 M \$15 17 M \$20 20 M \$30 40 M \$40 Add \$6 P & H
Info Pak \$43 \$46 \$50 \$60 \$70

InfoPak \$1—Plans: TechNote 122—\$7ppd USA

Antennas West

Order Hotline:

Box 50062-S. Provo UT 84605 801-373-8425

CIRCLE 282 ON READER SERVICE CARD

HamWindows

Your gateway to the world.
Software that combines the amateur radio with a personal computer.

HamWindows, Inc.
19032 Pauline Lane
Huntington Beach, Ca. 92646
(714)729-4222 FAX (714)644-8277

CIRCLE 345 ON READER SERVICE CARD

SHIRT POCKET

2M HIDDEN TRANSMITTER

5mw. >24 Hr. Operation from 9V Batt. Pre Programmed, up to 10 Sec. Of ID. Please Specify 12. Voice or CW. With 146.565 Xtal \$79.99 + 3.50 S&H. Add \$10.00 for other 2m Xtals. Great for sniffling Ready to hide! Make checks payable to: Don Lewis

GG ENTERPRIZE

129 E. Colorado Blvd.
Suite 524
Monrovia, Ca. 91016

The World of Ham Radio Callsign Jan 95 Database

You can have the latest US and Foreign callsigns available. 20,000+ software files for amateur radio. AmCall auto-logging station log book included with every CD. Over 1,350 Radio Mods. The latest space photos. The newest releases of amateur software. 1,100 images of lost & missing children. Thousands of SWL frequencies. Published every JAN/MAY/SEP Special rates for clubs, FTP, BBS, & PBBS sysops. DOS & Windows compatible. Can you afford to be without the biggest & best CD for amateur radio? Subscribe and get 3 issues for \$99 US, \$109 Foreign Single issues \$39 plus shipping: USA \$3, Overnight USA \$10, Foreign Air Mail \$5 AmSoft, PO Box 666, New Cumberland, PA 17070-0666 USA, FAX 717-938-6767



\$39
CD-ROM



AmSoft 717-938-8249

CIRCLE 113 ON READER SERVICE CARD

COMTELCO INDUSTRIES

Dual Band Mobile Antenna

140 MHz, 440 MHz
MAGNET MOUNT \$21.95
150 watt 12ft. RG58 + connector
PERMANENT MOUNT \$23.50
with NMO/TAD mount 17ft RG58
BNC or PL259 connector
DBD2 DUPLEXER \$49.00
UHF connectors 8" leads
Add 3.50 S&H
1-800-634-4622

COMTELCO INDUSTRIES, INC.
501 Mitchell Rd., Glendale Hts., IL 60139



CIRCLE 15 ON READER SERVICE CARD

Subscribe
to

**73 Amateur
Radio Today**

Call

800-289-0388

Ask KABOOM

Number 19 on your Feedback card

Your Tech Answer Man

Michael J. Geier KB1UM
c/o 73 Magazine
70 Route 202 North
Peterborough NH 03458

Phase-Locked Loops

A long time ago, I did a column on phase-locked loops (PLLs) and their use in frequency synthesizers. This time, I'd like to look at PLLs with regard to their many other uses.

What is it?

Just what is a PLL and why is it so useful? Basically, a phase-locked loop is an oscillator which can be made to track, or lock to, an incoming signal. You might wonder just what the point of that is. After all, if you already have an incoming signal at the frequency you want, why bother to create another one just like it?

The beauty of the PLL is that, while its output normally does track its input's frequency, it can have various other characteristics, some of which can be important and useful. For instance, the output signal can be of a different shape than the input. It could, perhaps, be a lot cleaner, or it could be a sine wave when the input is a square wave. In fact, that's a common use for a PLL: creating a sine wave from a pulsed, digitally controlled source. Another great use for the PLL is when you want to recreate a badly degraded signal, as is done in a short-wave radio's synchronous detector. A PLL sync detector phase-locks to the incoming AM carrier. Then, when the signal fades in and out, the loop stays locked and continues to supply the radio with a constant, clean carrier, which really helps reduce fading distortion in the demodulated audio. In fact, a well-designed loop can stay on frequency even if the carrier completely disappears for a second or so, which really helps with deep fades.

The output signal of a PLL also can be made at a multiple or multiple of the input. In other words, the loop can be used as a frequency multiplier or divider, and it will track the incoming frequency while it performs its division or multiplication chore. For division, that might seem overkill. After all, darned near any old digital gate can be made to do division. Yes, but only if you want square waves! For multiplication, though, the PLL represents one of the easiest ways to do the job. If you want, say, a frequency at three times the input, which tracks some modulation in that input, how else are you going to do it? Sometimes a simple harmonic tripler would work, but the frequency range of such a circuit could be too narrow. With a PLL, you can do it from audio on up to RF.

Finally, a PLL's output doesn't have to be from its oscillator! What else is

there? A particularly useful output is the control voltage which is used to make the oscillator track. Using that voltage as an output, it is easy to make FM and FSK demodulators.

How?

To understand the operation of all these circuits, it's necessary to grasp the basic operation of a PLL. This circuit scares a lot of people, and it really shouldn't. I don't know where the mystique about PLLs came from, but they're really not that complicated. Let's examine the basic operation of a PLL.

A phase-locked loop consists of three basic parts: an oscillator, a phase detector and a feedback network. The oscillator is not much different from any oscillator you already know, except that it's a VCO, or volt-

age-controlled oscillator. That lets the rest of the PLL adjust the frequency by varying a DC voltage. And, just as gross adjustment can change the frequency, fine variations in the DC control voltage can adjust the oscillator's phase. After all, the only difference between frequency and phase change is amount. In fact, that's where the phase-locked loop gets its name; it can lock its oscillator's phase to another signal, and it controls it with a feedback loop configuration, in which it monitors its own phase and corrects it until it matches.

The phase detector is at the heart of the loop. This thing has two inputs; one for the incoming signal and another for the PLL's oscillator. The output of the phase detector is a voltage which rises and falls according to which input leads or lags the other in phase. When the two are not even on the same frequency, the output of the phase detector goes up and down at a rate which equals the difference frequency between the two signals. It does that because the two are periodically crossing each other in and out of phase. I suppose that's the difference between a phase detector and a frequency detector; the phase detector has no way to tell which input is higher or lower than the other's frequency.

I suppose that, if you disconnected the oscillator's DC control line and fed it with a fixed voltage, you could use a PLL as a kind of IF subsystem for an

Back To Our Show

FM receiver, as it would have both an oscillator and an odd kind of mixer (the phase detector), which would produce a difference frequency which could then be demodulated, perhaps with another PLL! It would only work for FM, though, because you'd lose the AM envelope in the phase detector. I've never seen it done, most likely because commonly available PLLs won't operate at high enough frequencies to be very useful as radios. Besides, real FM subsystem chips are already cheap and common. Still, it would be an interesting thing with which to experiment, perhaps in a project which had some characteristic that made the use of standard FM chips unfeasible.

"A phase-locked loop consists of three basic parts: an oscillator, a phase detector and a feedback network."

coils or, in the case of a frequency multiplier, some active circuits. The purpose of the feedback network is to control the oscillator in a specific way. Let's say we want the PLL to track the input as fast as possible. If we just connect the output of the phase detector directly to the oscillator's control input, what happens? Well, it's safe to assume that, at first, the incoming signal and the VCO will not be on exactly the same frequency. So, the phase detector's output will swing back and forth as the two periodically cross in phase. That'll swing the oscillator back and forth, causing the phase detector's periodic swing to change its rate, because the oscillator feeds one of its inputs. The whole thing will continue to bounce up and down, out of control, and the VCO will never get locked to the input signal. That's not very useful. But what if we slow the action down a bit? Specifically, what if we make our feedback network significantly slower than the rate of change of the signals themselves? Let's say we have a 1-MHz signal rate, and we make the loop filter react no faster than 1/10 of that rate. What happens then? Now, the initial swings in the phase detector's output will be integrated into a rising DC voltage, which will gradually pull the oscillator up (or down, depending on the design). When its frequency gets to be the same as the incoming signal's, the phase changes will stop, and the detector's DC level will freeze at a specific level. If, as is likely, the VCO's phase does not

match the incoming signal's, the DC will adjust slightly up or down until the oscillator exactly matches the signal. The whole process can still be very fast, and loop instability can be completely prevented. And that is how a real PLL works!

Getting Loopy

Often, a simple RC loop filter is all you need for your feedback network. There are ways, though, to make filters which have special characteristics. For instance, you may want your PLL to lock up very fast but then tolerate some wobbling in the input frequency without pulling on the oscillator. And that leads us to another powerful use for the PLL: as an FM detector.

Up to now, we've been considering the PLL's oscillator output as the reason for using it. What if, though, we pick our output off another part of the loop? What about the VCO's control voltage? What does it represent?

In the previous circuit, all it represents is the PLL's internal housekeeping. You can, however, make it represent information. Let's say we feed the PLL an incoming signal which contains FM information. In other words, the signal deliberately wobbles around in frequency a little bit. Now, when we feed it to our PLL, we set the loop's VCO frequency to nominally rest at about the frequency the incoming signal would have with no modulation. As the signal wobbles around, what happens? The loop attempts to track it, right? In doing that, it moves the control voltage around each time the signal wobbles. As its frequency goes up and down, so does the control voltage. Does that sound familiar? Yes—the control voltage is tracking the frequency changes in the incoming signal, so it represents the same modulation signal it originally took to wobble the signal around. Thus, the control voltage has demodulated the FM information, and can be directly used as an output! And, the time constant of the loop filter sets the loop's upper frequency response. If we set it to be just a little bit faster than audio, we can feed in the output of an FM IF stage and out will come audio! If we want to limit the response to, say, 5 kHz, we just slow the loop down with a bigger loop filter, and it will be unable to respond faster than 5 kHz. Thus, the varying control voltage will never move faster than that. Pretty slick, huh?

Going Up?

One of the most fascinating uses for the phase-locked loop is as a frequency multiplier. Frequency multiplication is inherently different from frequency division. In division, all you're really doing is making the circuit change state on every certain number of changes in the original frequency. So, if you want to divide by three, you just count every third cycle and you're done. But in multiplication, you need more changes than you start out with. To multiply by three, you need three

changes for every one in the original signal. That doesn't sound so hard, but how do you make them all evenly spaced so that the output is a continuous signal? How do you make something change state when there's nothing to tell it when?

Divide and Multiply

Using a PLL for this task lets you pull a clever trick. Let's say you take the PLL oscillator's output and run it through a frequency divider before you send it to the phase detector. What happens then? If we divide the oscillator by three, then the phase detector thinks that VCO is running at one third the speed it really is. Let's make up an example to see how it works:

Foiled Ya

Let's say our incoming signal is at 1 MHz, and we want our output at 3 MHz, phase-locked to the input. If we divide the VCO by three, using a couple of digital gates or flip-flops, the loop will think both the input and the VCO are running at 1 MHz, and will phase-lock the VCO to the input. But, in order for the divided VCO to be at 1 MHz, the true VCO frequency has to be 3 MHz, thanks to the divider, so, when the phase director looks up the loop, the VCO will be phase-locked at the same multiple of the input frequency as the divider is set to. If you divide by three, you wind up multiplying by

three. And, as the input signal changes in frequency, the multiplied signal will follow it, as long as the input's changes are not so far off that the loop can't stay locked.

Everything Has Limits

That brings us to the last important point about PLLs. All of the design parameters are adjustable, and some of them fight each other. One important one is the frequency range the input signal can have while still keeping the loop locked. If it goes far enough off, the loop will unlock, making its outputs meaningless. Normally, PLLs have a "locked" signal which changes state when lockup occurs, so you know when you're in range. Still, the lockup range can be deliberately set, and sometimes you really want it narrow, to avoid having the loop lock to unwanted signals near the desired frequency. Other times, you want as wide a range as you can get, to allow a signal to wander all over the place and still keep the loop locked.

Try It!

Well, I hope you've enjoyed this little journey through the innards of the phase-locked loop. Why not play with one? Get yourself an LM565 or a 4046, read the data sheets, and see if you can make those chips play. I'll bet you can! Until next time, 73 de KB1UM.



THE DC POWER BEHIND YOUR SIGNAL IS TRIPP LITE.

PR Series DC Power Supplies



Performance that
"never misses a beat".
— 73 Magazine

Your performance depends on ours. Tripp Lite's PR Series DC power supplies are designed for years of reliable service and superior performance. They power practically everything in your ham shack, including low band rigs, 2 meter, UHF and microwave radios. Best of all, they're economically priced for your **best** value.

PR Series DC Power Supplies Feature:

- Great looks and a small space-saving footprint
- Crowbar overvoltage protection
- Current-limiting electronic foldback for automatic overcurrent protection
- Solid state, integrated circuitry for excellent regulation of output voltage
- Regulated output voltage to maintain 95% of no load value
- High quality filtering for very low ripple/low noise operation
- Heavy duty transformer for complete isolation from noise on incoming AC power

18 models available from 3 to 60 amps (including new 12, 20, 30 and 50 amp models) in 120 and 220/240 volt configurations. Rackmount models available. Tripp Lite also manufactures a complete line of power protection including the world famous **Isobar** surge suppressor.



500 N. Orleans
Chicago IL 60610
Tel: 312/755-8741
Fax: 312/644-6505
Faxback: 312/755-5420

Sample a unit today! Call and ask for Department Hmt.

DON'T MISS THIS ONE! GREATER BALTIMORE HAMBOREE AND COMPUTERFEST

HOST TO THE
ARRL MD STATE CONVENTION

MARCH 25 & 26, 1995

Timonium Fair Grounds
Timonium, Maryland

THE LARGEST SHOW OF ITS KIND
IN THE MID-ATLANTIC AREA

ARRL Forums & Programs • Banquet
10 Acres of Indoor and Outdoor Sales
3 Buildings • 1,100 Indoor Spaces
Buildings for Dealers & Manufacturers
Indoor Fleamarket • Outdoor Tailgate
FCC Exams • Acres of Parking
Over 18,000 Attended Last Year!
Discount 2 day admission by advance sale only, CALL!

Call: 410-HAM-FEST Write: G.B.H. & C.
Or: 1-800-HAM-FEST Post Office Box 95
Anytime, for Voice or FAX Info Timonium, MD 21094

CIRCLE 255 ON READER SERVICE CARD

73 Amateur Radio Today • March, 1995 71

HAMS WITH CLASS

Carole Perry WB2MGP
Media Mentors, Inc.
P.O. Box 131646
Staten Island NY 10313-0006

A Shocking Experience

There are certain experiments and science demonstrations that simply lend themselves to fun in the classroom. One of my personal favorites to do with youngsters is the one that demonstrates some of the principles of electricity via static electricity experiments.

Depending on the age level of the group you teach, you can have a brainstorming session to introduce or reinforce the meaning of "shock." Almost every child will have a "shocking" example or story to tell. We discuss the different kinds of shocks there are, and how in the wintertime we can do some really "shocking" things in our classroom.

We review that electricity is caused by movement of electrons from one atom to another. Static electricity, however, unlike the current that flows through the outlets at home, is at rest. The electrons (negative charges) in static electricity are passed from one object to another and stop there. The object that has gained electrons is negatively charged and the one that has lost electrons is positively charged.

Except for having fun with dramatic demonstrations in front of people, static electricity is most often just a nuisance. Point out to your audience how unruly our hair can get when we brush it on a dry, winter day. When walking

briskly across the carpet we can get shocks; and sometimes static electricity causes our clothes to cling. This is all harmless enough; but on a larger scale, lightning is caused by static charges that develop in the clouds. The energy released by a lightning bolt is thousands of times stronger than any other the children are likely to encounter.

Class Experiments

The classes always enjoy the experiments we do with static electricity. Here are some that can help kids learn more about the properties of things around us.

Thousands of years ago in ancient Greece, a scientist named Thales observed an unusual property of amber, a plastic-type material commonly used for jewelry. When rubbed briskly with fur, pieces of amber (or "elektron," as it was called) would attract small bits of cork, wood, or similar objects in much the same way that a magnet attracts iron-based metallic objects. Thales didn't understand why this occurred and assumed there was an

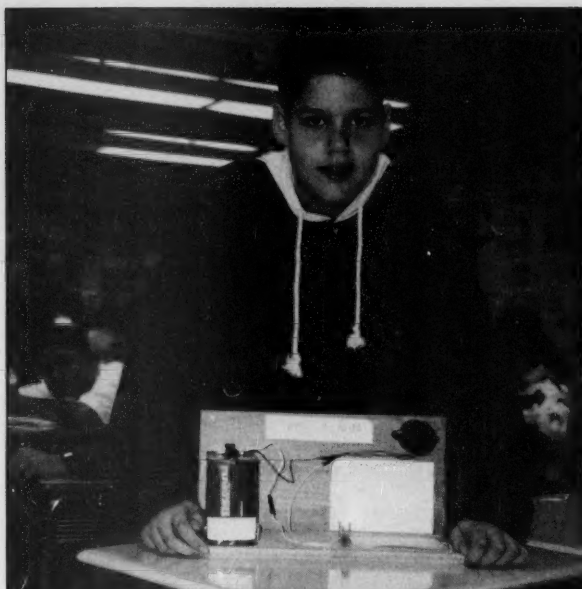


Photo B. Seventh-grader Juan Lugo demonstrates a follow-up project of a fire alarm he made.

comb (instead of the amber), and a warm, dry flannel cloth (instead of the fur). This demonstration works best on a dry day. Hold the comb in one hand

Here are some more static electricity experiments from *Planet Earth* by Clay Wollney. The supplies you will need are: two or more balloons, a coat hanger, three feet of string, a piece of wool clothing, and a spray bottle filled with water.

1. One of the easiest ways to demonstrate static electricity is to blow up a balloon and rub it vigorously against your hair. Touch the balloon to a wall. Electrons picked up by the balloon as you rubbed it on your hair caused the balloon to become negatively charged. It is attracted to the wall since the wall is not negatively charged.

2. Blow up a second balloon to the same size as the first. Place the string over the hanger and tie a balloon to each end of the string. Hang the hanger so that the balloons dangle alongside one another. Now rub one balloon with the wool and then release it. Is the other balloon attracted or repelled? Now, rub both balloons with the wool and release them. Do they still behave the same way? When only one was charged the balloons clung together (unlike charges attract). When both are charged, they push each other away (like charges repel).

3. Static electricity is more of a problem on dry days than on rainy ones. Water acts as a conductor, allowing charges to flow easily from one object to another, so charges don't build up. Charge both balloons, then spray the finest mist possible between the balloons. Does the moisture in the air change their behavior?

Be sure to take pictures of the children's faces while they do these experiments. Send me your best photos so we can share our experiences with other instructors.

"Except for having fun with dramatic demonstrations in front of people, static electricity is most often just a nuisance."

unknown force in the amber. This force, of course, became known as electricity.

With this as a background, have the children bring in a large plastic

and the cloth in the other. Briskly rub the comb a dozen or more times. Now bring the comb near some small bits of cork or paper and watch the pieces "jump" to the comb.



Photo A. Many museums, like the Franklin Institute in Philadelphia, have hands-on displays demonstrating static electricity.

March '95

Reader Service

73 Amateur Radio Today

☐ Yes! Send me 12 issues of 73 at the low rate of \$19.97. (Saves 43% off the cover price.)

Canada add \$7.00 plus \$1.40 GST;
Foreign add \$9.00 surface; \$42.00 airmail

☐ Yes! Send me 12 issues of *Radio Fun* at the low rate of \$12.97. (Saves 20% off the cover price.)

Canada add \$7.00 plus \$1.40 GST;
Foreign add \$12.00 surface; \$36.00 airmail

☐ Bill me ☐ Payment Enclosed

Charge my ☐ AMEX ☐ MC ☐ VISA

Card # Expires

Name (please print) Call

Address

City State Zip

This card valid until April 30, 1995
in the U. S. and possessions.

"You make the 73 supporting advertisers
very happy when you're
interested in them" ... Wayne

1	2	3	4	5	6	7	8	9	10	201	202	203	204	205	206	207	208	209	210
11	12	13	14	15	16	17	18	19	20	211	212	213	214	215	216	217	218	219	220
21	22	23	24	25	26	27	28	29	30	221	222	223	224	225	226	227	228	229	230
31	32	33	34	35	36	37	38	39	40	231	232	233	234	235	236	237	238	239	240
41	42	43	44	45	46	47	48	49	50	241	242	243	244	245	246	247	248	249	250
51	52	53	54	55	56	57	58	59	60	251	252	253	254	255	256	257	258	259	260
61	62	63	64	65	66	67	68	69	70	261	262	263	264	265	266	267	268	269	270
71	72	73	74	75	76	77	78	79	80	271	272	273	274	275	276	277	278	279	280
81	82	83	84	85	86	87	88	89	90	281	282	283	284	285	286	287	288	289	290
91	92	93	94	95	96	97	98	99	100	291	292	293	294	295	296	297	298	299	300
101	102	103	104	105	106	107	108	109	110	301	302	303	304	305	306	307	308	309	310
111	112	113	114	115	116	117	118	119	120	311	312	313	314	315	316	317	318	319	320
121	122	123	124	125	126	127	128	129	130	321	322	323	324	325	326	327	328	329	330
131	132	133	134	135	136	137	138	139	140	331	332	333	334	335	336	337	338	339	340
141	142	143	144	145	146	147	148	149	150	341	342	343	344	345	346	347	348	349	350
151	152	153	154	155	156	157	158	159	160	351	352	353	354	355	356	357	358	359	360
161	162	163	164	165	166	167	168	169	170	361	362	363	364	365	366	367	368	369	370
171	172	173	174	175	176	177	178	179	180	371	372	373	374	375	376	377	378	379	380
181	182	183	184	185	186	187	188	189	190	381	382	383	384	385	386	387	388	389	390
191	192	193	194	195	196	197	198	199	200	391	392	393	394	395	396	397	398	399	400

Where did you get this copy of 73?

999 newsstand

998 subscription

FREE INFORMATION READER SERVICE CARD

Reader Service: To receive more information on the products advertised in this issue of 73, circle the appropriate number(s). Please allow 6 weeks for processing of inquiry. Offer valid in the U. S. and possessions.

B9503SS8-8



Place
Stamp
Here

73 Amateur Radio Today

READER SERVICE MANAGEMENT DEPARTMENT
PO BOX 1928
RIVERTON NJ 08077-7528



ADVERTISERS

R.S.#	page	R.S.#	page	R.S.#	page	R.S.#	page
• A & A Engineering.....	30	99 Communication Concepts.....	82	• Maggiore Electronics Lab.....	85	34 Ramsey Electronics.....	21*
351 Absolute Value Systems.....	52	10 Communications Specialists, Inc.....	79*	• MCM Electronics.....	60A	254 Ross Distributing.....	56
164 Ace Communications of Indianapolis.....	53	268 Computer Automation Technology.....	77	• Meadowlake Corp.....	30	• RT Systems.....	17
149 Advantage Instruments Corporation.....	2	276 Computer Aided Technology.....	82	86 MFJ Enterprises.....	11	• SAMS.....	17
194 All Electronics Corporation.....	61	15 Comtelco.....	69	86 MFJ Enterprises.....	29	36 Scrambling News.....	56
• Alphalab.....	83	• Dayton Hamvention.....	33	86 MFJ Enterprises.....	41	167 Sescom, Inc.....	58
• Amateur Radio Excellence.....	30	• Digital Communications.....	84	86 MFJ Enterprises.....	45	188 SGC Inc.....	13
113 Amsoft.....	69	13 Doppler Systems.....	77	160 Micro Computer Concepts.....	30	300 Shirts by Ray Sarrio.....	84
57 Antennas West.....	31	• Down East Microwave.....	54	144 Micro Control Specialties.....	79	244 Software Systems.....	84
380 Antennas West.....	56	114 E. H. Yost.....	54	193 Morse Tutor Gold.....	55	269 Software Systems.....	78
5 Antennas West.....	58	• Electronics Book Club.....	27	248 Motron Electronics.....	53	51 Spectrum Communications.....	37
282 Antennas West.....	69	169 G & G Electronics.....	50	64 Mouser Electronics.....	63	69 Spectrum Electronics.....	39
135 Antennas West.....	82	• Greater Baltimore Hamboree.....	71	114 Mr. Nicad.....	54	183 Spectrum International.....	25
89 Antennas West.....	83	193 GGTE.....	55	54 NCG/Comet.....	5	• Ten-Tec.....	57
336 Antennas West.....	84	• GQ Enterprises.....	69	25 NCG/Comet.....	43	• The Ham Center.....	30
116 Antennas West.....	85	280 Grove Enterprises.....	46	193 Novatech Instruments.....	17	384 The Ham Contact.....	49, 50
• Antique Radio Classified.....	25	• Ham Radio & More.....	47	1 Number One Systems Ltd.....	65	269 Tigertronics.....	78
80 Arrow Antenna.....	85	286 Hambrew Magazine.....	58	82 Oak Hills Research.....	65	374 TNR.....	43
16 Astron Corporation.....	19	• Hamfest Money-Maker.....	68	• O.F.S. Weather FAX.....	63	• Tower Jack.....	17
272 Azden Corporation.....	55	• Hamtronics, Inc.....	7	• One Hour Code.....	61	22 Tri-Ex.....	42
41 Barry Electronics Corporation.....	23	345 HamWindows.....	69	102 ONV Safety Belt.....	60	255 Tripp Lite.....	71
45 Bonneville Music.....	68	179 ICOM America, Inc.....	CV2*	• Pauldon.....	50	• Uncle Wayne's Bookshelf.....	86, 87
42 Bilal Company.....	55	283 Innotek, Inc.....	52	263 PCBboards.....	60	32 Universal Electronics.....	17
56 Buckmaster Publishing.....	17*	42 Isotron.....	55	• P.C. Electronics.....	53*	• Universal Radio.....	85*
7 Buckmaster Publishing.....	84*	55 J-Com.....	51	• P.C. Electronics.....	59*	• Vanguard Labs.....	62
168 Buckmaster Publishing.....	85*	• Jade Products.....	17	• Peet Bros.....	53	259 Versatel Communications.....	82
• Butternut Electronics.....	61	159 Japan Radio.....	1	68 Periphex.....	53	104 Vis Study Guides, Inc.....	25
222 Byers Chassis Kits.....	39	26 J.M.S.....	54	198 Personal Computer Repeater Controller.....	60	191 W & W Associates.....	35
184 C & S Sales, Inc.....	25	27 John Bell.....	51	• Personal Database.....	58	38 W9INN Antennas.....	51
• CABLE X-PERTS, INC.....	55	• K-Comm.....	30	249 Phillips Industries, Inc.....	58	20 Wolfe Communications.....	51
• CABLE X-PERTS, INC.....	83	2 Kawa Productions.....	30	49 Polyphaser.....	49	• Yaesu Electronics Corporation.....	CV3
• CB City International.....	83	151 KDC Sound.....	58	147 R.L. Drake Company.....	9	268 Zero Surge Inc.....	82
• CCPW.....	17	• Kenwood USA Corporation.....	CV4	153 Radio City.....	88		
265 Chipswitch.....	25	234 Lentini Communications.....	77	58 Radio Engineers.....	52		
156 Commpute Corporation.....	39	47 Link-Com.....	42	• Radio Fun.....	73		
				• RAI Enterprises.....	83		

* Advertisers who have contributed to the National Advisory Committee (NIAC).



Radio Fun

"The beginner's guide to the exciting world of amateur radio."

Radio Fun is packed full of information to help you get more fun out of amateur radio. Basic "how-to" articles will get you up and running on packet, ATV, RTTY,

DXing, and the dozens of other activities that make amateur radio such a great hobby. You'll get equipment reviews geared toward the newcomer. We'll help you upgrade to a higher class license with monthly columns designed to teach you what you need to know in a fun and exciting way. You'll find it all, and more, in the pages of Radio Fun.

Don't wait another minute. Subscribe today for only \$12.97 for one year. That's 12 issues of the only ham radio magazine that is geared especially for the newcomer, or any ham who wants to get more fun and excitement out of amateur radio—Radio Fun!

12 issues for only \$12.97
1-800-677-8838

☐ **YES! Sign me up right now!** 12 issues of *Radio Fun* for \$12.97.

NAME _____ CALL _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

Check _____ MC _____ Visa _____

CARD# _____ EXPIRES _____

Class License _____ Year Licensed _____ 73 Subscriber _____

QST Subscriber _____ CQ Subscriber _____

Mail to: *Radio Fun*, 70 Route 202N, Peterborough, NH 03458
[Or call 800-677-8838 (in NH call 924-0058), FAX: 603-924-8613]
Canada add \$7.00 plus .70 GST. Foreign add \$12.00 surface, \$36.00 airmail.
Newsstand Rate \$18.00. Basic Subscription Rate \$14.97. O9M

NEVER SAY DIE

Continued from page 4

Hamming Irrelevant?

Will the development of the "information superhighway" eventually make amateur radio irrelevant? The Internet is already offering far better communications facility than amateur radio. Our ham contacts with other countries are severely limited by (a) propagation conditions, (b) interference (QRM), (c) noise (QRN), (d) fading (QSB), (e) language differences, and (f) time differences.

We could overcome some of these limitations if we developed a worldwide satellite repeater communications system. This could help us avoid our problems with ionospheric propagation, noise, and fading. We might even be able to develop systems which would reduce interference. And the time isn't far off when we could even overcome language differences with software. But I have to admit that despite my endless nagging and urging that such a system be developed, I see little sign of any amateur interest in the project.

That being the case, the Internet approach will win by default. E-mail does about the same thing as packet radio, only without all the miseries we're fighting with shortwave packet circuits. Worse, while amateur slowscan is creeping along, the growth of MPEG and other systems of reducing video bandwidth will be making not just good quality photos available over the Internet, but full motion, high quality video.

Right now you can get on the Internet and strike up a live conversation with people anywhere in the world. It is already providing the service we only wish we could. It's better, in that once you get familiar with the Internet you can find like-minded people to talk with on virtually any subject. One time, many years ago, I proposed the development of such a system for amateurs. I'd love to find hams interested in the things I want to learn about and talk with them. I'm getting less and less interested in taking potluck, and finding it difficult to discover any area of mutual interest from among the largely retired hams inhabiting 20m these days.

I'd love to talk about cold fusion, sky diving, scuba diving, cooking, and any of a hundred or so things I'm interested in. One time on a ski lift in Aspen I met one of the leading astronomers and we had a momentary talk about the bubbly nature of the universe, which he'd recently helped discover. Another time I went up the lift with Mike Markkula, the chap almost singularly responsible for Apple's growth in the early days. Mike is not a ham. Nor was the astronomer.

Sure, I might luck into contacting King Hussein, but even if I did, after about 10 microseconds the frequency would be totally wiped out by DXers frantically calling him to get a QSL

card. I remember trying to get through to Arthur Godfrey one time when he was on a DXpedition to the Sahara. He had Colonel Carroll Cone with him, an aviator friend of my father's I'd known from childhood. He and my father were in the Army together when they learned to fly in San Antonio in 1921. I desperately wanted to get through and say hello. No way. I still remember that frustration.

Many of the cold fusion scientists are on the Internet, where I can communicate live or via E-mail. The rest of them will soon be on. I'll be there too, looking for interesting news about kit planes, ultralights, hang gliding, places to go diving, new countries to visit, and a whole bunch of new ways to generate power. Then there's my growing interest in finding out more about life. I've been clueing you in as I've discovered exciting books about this. I know there are probably hundreds more books I'd love to read, if only I had some way of finding them. This is what the Internet will eventually offer. Yes, it's something amateur radio could offer, but only if we had the pioneers to make it happen. Alas, we seem to have killed off the interest that attracted youngsters to the hobby, and without young blood, we've run out of steam in the pioneering department. How many famous explorers started when they were at retirement age? And that's what our average ham is approaching.

I wonder if there will ever develop on the Internet anything like our ham contests? Well, they already provide contest areas for chess, and probably some other games. How long will it be before an Internet computer shuffles and deals the card for bridge, canasta, and even poker? I've spent weekends doing the Sweepstakes contest, DX contests, and VHF contests. They were fun and exciting. I'm glad I did them, but there's no way I'd get involved with doing them again. I no longer have the time to invest in that kind of entertainment.

Is the collection of QSL cards any better than collecting matchbooks, stamps, or even sugar packets from restaurants around the world? I've got boxes of QSLs, stamps, matchbooks, and sugar. They're only a problem for my heirs. Heh, heh. Imagine being faced with six big boxes of sugar packages from maybe a hundred countries. Can you throw them all out? Who would want them? Are they worth anything? I guarantee that old QSLs have zero value, so they'll hit the trash can soon after you win your Silent Key award from the League. Hey, you don't even have to be a member to win that one. Of course, you can only win it once.

How many of you are checking into a ham group on CompuServe? Prodigy? America Online? The Internet? As soon as we reach the 50% level we can start petitioning the FCC to auction off our bands and agree to split the proceeds with them. If only the chaps actually using the bands pocketed

the money, they'd all be able to retire immediately.

The FCC, which already has the taste of blood from their recent frequency auction, may already be sniffing at the 99.8% of our ham frequency allocations that we're not using. And, unless something major happens, will never use.

What could change all this? Only a miracle, and it's been a couple of millennia since the last big miracles. First, the ARRL directors would have to change their minds about the code, and you know how likely that is. Without the code obstacle we might stand a chance of attracting youngsters into the hobby. That, alone, won't do it. The League directors would also have to change their minds about keeping out newcomers. They seem to feel that we have more hams than we need . . . just listen to the QRM on 20m, if you think otherwise.

If we were to change things. If we were to think in terms of marketing the hobby, of making it attractive to youngsters, of advertising and promoting it, we might be able to bring in enough newcomers to hold our bands. And none of this 20 wpm stuff for the Extra Class license. We need a couple million young hams, and we're not going to get them while we're using the code as a barrier. But I've written about all that before. You didn't agree then and you probably don't agree now, or you'd have done something. That's OK, I'll keep publishing my magazines as long as amateur radio (or I) survive. Right now I think the odds favor my surviving a lot longer than amateur radio, and I've got a long list of ailments. Ask me about that sometime on the air.

No, I'm not going to petition the FCC for the changes I propose. I'm not your leader, I'm just the coach. Ham radio is still mostly a hobby for me and I intend to keep it that way. Oh, I thought about the leader business years ago, but that takes building something like the ARRL, complete with all the nitty-gritty of dealing with government agencies, militant gays demanding the "right" to advertise for members of their gay club, militant femmes demanding an end to the use of "YL" in the club publications, militant crippled hams demanding a column for the physically challenged, and so on. I'm trying to think of something I can militantly demand as a right.

Meanwhile, thousands of people are signing onto the computer networks every week, and the more youngsters that go that route, the less need there will be for amateur radio. Unless you can come up with some benefit that amateur radio can provide that the nets can't. Please advise.

One more thing. I don't want to get any messages from you that you don't always agree with me. If you disagree on the above, you damned well let me know why. That means you've got to do some thinking. For some of you, it's about time.

Better Junior Ops

My search for a way to generate more young hams has taken a strange turn. My original goals were to (a) provide a solid excuse for our hobby to be kept alive, despite the pressures for our valuable spectrum by rapidly expanding commercial interests and (b) help provide the high-tech work force our country is going to need to compete against the other industrial countries in the next century.

If we're going to do this we have to get kids interested in hamming. This brought me head-to-head with the mess our schools are in. And that, in turn, got me to reading about our educational system. I've found that I'm not alone in criticizing our school system.

Now, before I get really started on how lousy our schools are, let's just consider what you might do if you were interested in having the very best child or grandchild you could. First, let's talk about what can go wrong, and then we can discuss how to fix the situation. I'm presuming, of course, that you might have an interest in giving your children the best start in life that you can. Maybe you don't care.

By the time your kids are seven the largest part of their characters will have already been formed. The child at seven won't be very different fundamentally from the teenager at 15, or the grown-up at 30.

Your child starts with the sperm and the ova. Anything you do to screw up your DNA before conception is going to affect your kid, and not positively. If you mess your sperm up enough, there'll be a miscarriage. But a lesser change in the DNA message will just burden your child with problems. There may be health, behavioral, or even cosmetic problems.

So what can we do to give our kids the best possible start? Well, research has shown that there are a lot of things that affect our sperm. There are drugs such as nicotine and alcohol. There are magnetic fields such as we find with electric blankets or living near power lines or power sub-stations. There are poisons such as mercury, silver, and nickel, which we can get from amalgam fillings in our teeth. Most of us already know about crack babies, and problems from cocaine, pot, and the hard stuff.

So let's say that you and your wife go out of your way to give your kid the best start you can. Then comes birth. I've got to get you to read *The Continuum Concept* by Liedloff. That'll keep you from letting the hospital put your baby in their nursery. This is a wonderful guide book for the first year of life.

Next comes the pre-school era from one to five. This can be a time of incredibly rapid learning. It's a wonderful time to teach babies several languages, if you have a way to continue and develop their use later on.

Unfortunately, even if we've done everything the best we can until we send them to school, this is when we will permanently screw up their lives. I

hope I can get you to get the book by John Gatto, the New York State Teacher Of The Year, *Dumbing Us Down, The Hidden Curriculum of Compulsory Schooling*. It's inexpensive and a humdinger. Of course, since you are an alumni of this school system, the chances are great that you do not have any interest in reading books. Do you know that the average American school teacher only reads one book a year? And then, even if you do read Gatto's book and get all upset when you find out what's been going on in schools, you have been so conditioned by your own school experience that you are gutless and won't have the initiative to even try and do anything about it.

Heck, I've discussed the major problems facing our society and proposed inexpensive, creative solutions to them in my *Declare War* book. Several thousand people have bought it, yet I've seen no movement to try to implement any of the proposals. "It can't be done. It's hopeless." Until I read Gatto's book I hadn't realized why I was getting verbal and written support, but not seeing any sign of people doing anything.

I was around 11 when it finally dawned on me that kids had no more rights than slaves. By law I had to go to school. The only rights I had in school were those the authorities let me have, and they have been backed up by the Supreme Court in this. I was forced to comply by the use of embarrassment and humiliation. You do nothing unless the teacher tells you to . . . which stifles thinking and makes you dependent on the teacher. I see this pattern in many of the youngsters I've hired, who are unable to think for themselves. They sit and wait until they're told what to do. They are unable to plan work. They've always been stopped before finishing something by the bell, so they're not familiar with the concept of completing work.

Gatto says, "It is the great triumph of compulsory government monopoly mass-schooling that among even the best of my fellow teachers, and among even the best of my students' parents, only a small number can imagine a different way to do things. Only a few lifetimes ago things were very different in the United States. Originality and variety were common currency; our freedom from regimentation made us the miracle of the world; social-class boundaries were relatively easy to cross; our citizenry was marvelously confident, inventive, and able to do much for themselves independently, and to think for themselves."

Gatto points out that it only takes about 100 hours for a person to learn to read, write and do arithmetic, as long as they're willing to learn. From then on they can teach themselves. "Schooling, through its hidden curriculum, prevents effective personality development. Indeed, without exploiting the fearfulness, selfishness, and inexperience of children, our schools could not survive at all, nor could I as a certi-

fied teacher. Nobody survives the curriculum completely unscathed, not even the instructors. The method is deeply and profoundly anti-educational. No tinkering will fix it . . . don't be fooled into thinking that good curriculum or good equipment or good teachers are critical determinants of your son's or daughter's education."

He points out that before television children had enough time to themselves to learn about self-motivation, perseverance, self-reliance, courage, dignity, and love. Now kids, on the average, spend 55 hours a week in front of the TV. That's one-third of their time. Add to that the stresses of a two-income or single-parent family, and our kids have too little time to learn to become human.

Is it any wonder that our engineering universities are running out of potential students, and are having to continuously lower their admission standards? Only 7% of the high school graduates in America have enough math and science background to be accepted by an engineering college. The colleges have responded by turning to foreign students. That's great for other countries, but it sure leaves ours in a fix. Here we are heading into a high-tech future and we're turning out fewer and fewer engineers, technicians and scientists.

The time was, 50 years ago, that youngsters wanted to be hams so badly that they'd put up with learning the code as a barrier. I did, even though I hated being forced to do something which did not make sense to me even then. Very few of the kids these days have the passion to surmount obstacles, so we've instituted the no-code license. Well, we've been lowering the standards for school grades in order to get our kids through school, which is the same thing. They're even lowering the SATs because our kids' scores have dropped so much. Now I see some hams pleading that we lower the technical exam standards so kids won't have to memorize so much to get a ticket.

There may be some American schools that are pretty good. I've read about a few. But most of the better-educated children today are being schooled at home by their parents. Maybe you've read about it in *Newsweek*.

Home schooling will be a lot simpler once we have a good video educational series parents can use. These would use top-notch performers, plenty of graphics, and be fun to watch. PBS has been producing some superb educational videos. Now we need to have them to cover everything being taught in the K-12 years, plus everything that should be being taught. And also plus everything kids might want to learn, but which isn't being taught. We need thousands of these videos.

We'll still need schools to provide the hardware and facilities to teach skills. You can teach a lot about driving with a simulator, but then you need a car. Ditto flight simulators, etc. You

can't learn to juggle with a simulator, or to throw a boomerang. Or do glass blowing.

College? There may be some that are okay, but if you read the books on education you'll find that most aren't much good. Most of the "teaching" is done by student instructors. Get a copy of Thomas Sowell's *Inside American Education*, 1993, Free Press, \$25.

If you learn much about nutrition you won't let your kids near a McDonalds. Granted, it's difficult to get the facts on nutrition. The field is overgrown with fads and scams. But if you want to raise healthy, happy, intelligent children, you'd better learn.

So much for today's sermon. If you're interested in learning more about education, I've got a bibliography available of the more important books I've found on the subject. Send me an SASE and then head for a good library.

Ooops!

Did you or did you not send for the ham CD composed and sung by Andrew OZ1XJ and Lissa OZ1XY which I wrote about in the December issue? What do I have to do to get you to support ham entrepreneurs? Particularly ones with outstanding products? Sigh . . . sometimes you almost discourage me. The songs on XJ and XY's CD are by far the best ham-oriented songs I've ever heard . . . and "ever" is a long time for someone who's been hamming for 56 years. One picky-picky reader noticed that I got Andrew's call wrong in my write-up. It's OZ1XJ.

No, please don't tell me that you don't have a CD player. Compact discs have been out for over 10 years now and LPs have almost disappeared, which tells me that you are either making do with the garbage music you get from radio, or that you are missing one of life's great pleasures. No, I don't expect you to go berserk buying music, but good grief, you certainly should have a decent CD collection by now. It's like not reading books and magazines. It shows a poverty of intellect and imagination.

You need to spend some time quietly thinking, some reading, both for enjoyment and furthering your education, and some time listening to music. It wouldn't hurt for you to spend some time writing too. Far too many hams that I talk with on the air seem to be one-dimensional (or less). Now and then I run across someone I can talk music with. What pieces by Gottschalk or Nazareth are you familiar with? Lamb, Ippolitov-Ivanov, Gliere? Songs from the 1890s, show music of the 1930s and 1940s? Sousa, Strauss? If you hear me on the air let me know what music you've heard recently that you think I may have missed. Or what books you think I might particularly enjoy.

How'd You Do?

Yes, I tried to make my little 33-country DX contest in December

(p.76) a nasty one. I have to uphold my reputation, right? Plus I got to brag, since those are all countries I've visited. I should have started writing my travelogues years ago. Of course my main reason for bringing all this up is to put a burr under your blanket and get you off dead center. It's great fun to visit and get on the air from rare countries, and it doesn't have to cost a fortune. You're a ham, so how about doing some real hamming?

If you don't want to be bothered with the weight of a rig and the customs hassles, make a deal to use the station of someone in the country, with the promise to take care of the QSLs. Most hams in rare countries really hate being forced to make 30-second contacts by the gross just to have to fill out a QSL card. A few are taking advantage by asking for green stamps, and making a nice profit on the deal. I remember one famous DX-peditioner I knew very well who charged \$50 each for QSLs from the rare countries he put on the air and bragged that he was pulling down over \$50,000 a year tax free with this scam. He got so greedy that he made thousands of contacts from countries he didn't even visit.

I've never had any problem finding a station I could use during my visit to most countries, so I've rarely had to take a station along on my trips . . . except for a 2m HT.

Religion and Politics

We sure seem to have a problem in America with religious zealots trying to force the government to pass laws supporting their religious beliefs. We had prayers every day in schools for years without it hurting anyone . . . then someone decided to make a big deal out of it and look at the mess we have with the school prayer pro and con groups. Then there's the creationist baloney, where a few religious fundamentalists want to force our schools to teach their religion. And look at the awful mess we have with the pro and con on abortions!

The "Right To Life" bumper-sticker crowd are basing their rhetoric and beliefs on the lie that life begins at conception. That's a crock. Both the ova and the sperm are demonstrably quite alive well before they ever get together. Indeed, we have a ton of published research reports showing that a man's sperm can be damaged by smoking, drinking, or taking drugs before conception . . . and that this damage results in often serious problems for the resulting child. Ditto the mother's eggs, which can also be damaged by pre-conception drugs in her system.

Will the right-to-lifers start trying to get laws passed making it illegal to kill sperm? The Catholic Church already is on record as opposing the frivolous waste of sperm, right? But what about the 499,999,999 sperm that don't make it at the moment of conception? They're all alive and every one of them has the potential to start a child. Will we start seeing movements to

make sure that none of a woman's eggs are allowed to die? Will they picket the Kotex Company, which is abetting this terrible loss of life? Millions of potential American babies are being killed every day! Let's put a stop to this awful human campaign.

OK, maybe we shouldn't consider life starting at conception. So when does it start? You're not going to like this, but my earlier concept of life being alive and well before conception is, in my professional experience as a psychotherapist, quite accurate.

The psychotherapy I used involved using hypnosis to regress people to the moment when a current day psychological problem or illness was triggered by a past traumatic incident. While most problems resulted from incidents after birth, not a few involved things that happened during pregnancy, and every now and then some patients would go back even before conception with recollections of traumas. I'm not talking about past lives incidents, but those which involved the sperm or the ova before conception. If you know a good hypnotist you, too, can go back to that period of your life and rerun it. It's there and it's recorded in some way we still don't understand. You can even fast-forward it, if you want.

The death of someone we love is a tragedy. The death of a wanted baby is a tragedy. But I remember all too well one woman whose mother cursed her every day of her life because the mother got pregnant and "had to" marry the father, who was an unmitigated louse. The daughter, who was beautiful, grew up totally believing that she was ugly and worthless. She was a real mess mentally. Manic depressive. She, in turn, passed along this heritage to her daughter.

Subtle Energies?

One of the more interesting conferences I've attended was a subtle energies conference in Monterey (CA) put on by the International Society for the Study of Subtle Energies and Energy Medicine in 1993. I missed their 1994 conference because I was all tied up with the mess I told you about, when a couple of employees, with the help of a certain pinko opportunist most of you know, tried to put me out of business. I won't miss their 1995 conference.

OK, what are "subtle energies?" No one knows. Yet. Indeed, they may not be energies, though they act like them. The main thing I appreciated with this group was their open-mindedness. Let me quote from one of the presenters, Larry Dossey, M.D., "And anyone who at the present day expresses confident opinions, whether positive or negative, on ostensibly paranormal phenomena, without making himself thoroughly acquainted with the main methods and results of this careful and long-continued work, may be dismissed without further ceremony as a conceited ignoramus."

"The failure to understand how

something happens in science, however, is not a particularly damaging admission. At the turn of the century, scientists were unable to explain a very common event: sunshine. An explanation of how the sun shines had to await the development of nuclear physics. In the meantime, the lack of an explanation hardly annulled the fact that the sun did indeed shine."

The lack of radio signals from other civilizations may have more to do with our primitive communications system. There could well be some sort of life-force communications system which is instantaneous and not limited by distance. Once that is discovered we may suddenly find ourselves in communications with an infinity of other beings. Once a civilization progresses to using thought for communications, why would they need slow, bandwidth-bound, interference-prone, radio? That might explain the lack of radio signals from space.

We have a host of hints that there may be some new kind of communications medium that we haven't identified yet. At the last conference I was fascinated by a video showing a psychic influencing the surface tension of water on cue from hundreds of miles away. She also was able to disturb a cloud chamber on cue.

I hope some of you who are interested in learning more and have the time to attend the conference will be there with me this year June 23-26th in Boulder (CO). You can get more information from ISSSEEM, 356 Goldco Circle, Golden CO 80403; 303-278-2228; 279-3539 Fax; CompuServe 74040,1273.

IBM and Apple Both Fail? That's Ridiculous!

There's still time for either or both companies to be rescued, but I'll be very surprised if it happens. Are you interested in what's gone wrong and why I think the problem probably is terminal? Well, I'll tell you anyway.

Both companies have had recent CEO changes as a result of poor performance. But the new CEOs, unfortunately, aren't the right people for the emergency. With both companies having financial problems, their boards have reacted reflexively and put in bean counters. Financial men to handle financial problems, right? Bad decision. If I'd been on either board it never wouldn't have happened that way.

But then I haven't seen any sign that the boards of either corporation have anyone who really understands the business they're in and the sweep of history in this industry. I guess you had to have been there to know what's been going on inside the industry.

Let's Take Apple First

Steve Jobs has been hailed as a visionary because of the popularity of the Apple. Ditto John Scully for him. I think I can make a good case for neither really being visionaries. Indeed,

Scully was brought in to rescue Apple from Jobs' monumental blunders, which were sinking the company. We've had a good practical example of Jobs' vision in the dismal failure of his NeXT computer, which is now kaput except for its operating system.

The original Apple was put together by Steve Wozniak. Jobs, his friend, had been selling those illegal blue boxes to people wanting to cheat the phone company out of long-distance charges and saw Woz's Apple as a marketing opportunity. In that he was right, but it didn't take a lot of vision to see where the microcomputer industry was heading, just a reading of my editorials in *Byte*. By the time Apple was getting started I was already starting *Kilobaud*, my second computer publication.

The Apple computer took off and soon had 40% of the microcomputer market. Radio Shack's TRS-80 had another 40% of the market, and about 200 small companies (all now gone) shared the other 20%. This was the way it was when IBM came into the market with their PC and blew everything up.

Meanwhile, the rift between Jobs and Wozniak was widening. The Woz was pushing to keep on improving the Apple II. Jobs, who'd had little to do with its design, had delusions of grandeur and wanted to invent his own computer. This resulted in the Apple III and the Lisa, two bombs. Woz left in disgust.

The Lisa was based on a new approach to computing that had been developed by Xerox in their Palo Alto Research Center, one which allowed the user to work with icons and menus instead of typed in commands. It was a good approach, making computers much easier for beginners to use. Friendlier. Except that the Lisa was pitifully slow.

The Apple II was based on the 6502 microprocessor, which was pretty good when it came out in 1975, but was getting to be an antique by 1979. The Intel 8080 had been improved with the 8086 and the 8088. Then came the Z80 and the 80186. It was a steady improvement and growth of the basic 8080, and all designed by one chap. The same thing was happening to the 6502, but Jobs wouldn't let the Apple II be upgraded to the 65816, a 16-bit and much faster version. He had a vendetta against the Apple II and Woz, and this doomed the II.

I visited the chap who had designed the 65816 to get some samples for projects I was working on and he had a 65832 all designed and ready for prototyping. This would have run 8, 16, or 32-bit software, it ran at 30 MHz, and had built-in circuits to speed up the disk drives and output to a printer. This chip would have put the Apple II into the minicomputer power bracket. Jobs said no, a decision that cost Apple billions.

When the Lisa laid an egg Jobs rounded up a development team to

speed it up. In 1983 he introduced the Macintosh with the usual hoopla. The Mac was much better than the Lisa, but it had almost no application programs, so its acceptance was slow. It was supposedly aimed at the business market, but there were no business programs for it. The first software made use of its graphic abilities and soon was being accepted by artists. The real breakthrough came when desktop publishing software was developed. The Mac still is a stranger in offices, where the IBM format completely dominates.

The mess all this made at Apple resulted in their bringing in Scully, who got rid of Jobs as quickly as he could. But the damage had been done and Apple today has only 13% of the market. If Jobs had let the Woz keep on developing the Apple II the company might have had two winners today, and a few billion dollars more in sales.

There is a wide-open opportunity for either Apple or IBM to take the next logical major step in the market, but with bean counters in the CEO chairs instead of visionaries, the chances of either company taking this step are minuscule. Such a step would quickly leave all the clones behind, knocking many of them out of the business. The step would require the least change for IBM, and could reverse their gradual disintegration. I've written to both of the new CEOs, but have not had any answer.

The step involves the development of industry niche specific computer systems, complete with local service. I've written about this in greater depth in my *20/20 Foresight* pamphlet (#14).

The IBM team which developed the PC saw the importance of third-party support for the Radio Shack TRS-80, so instead of going the old IBM route of a closed operating system, they cooperated with software and accessory suppliers. Radio Shack, meanwhile was still fighting these suppliers, so they dropped their support of Radio Shack and moved to IBM. And that's when the Radio Shack computer share of the market dropped from 40% to around 4%, losing them tens of billions. Radio Shack has never recovered from this blunder by Tandy Chairman Roach.

Now the IBM PC is getting thrashed by clones, but the real long-range disaster for IBM is the loss of the mainframe market to super-micros, as I predicted over 10 years ago. Apple, by keeping their operating system closed, has discouraged software support of business-oriented systems, so even though the Macintosh has been ahead of the PC in graphics and publishing, it's been behind with business applications . . . and that's over 80% of the market. Only a bold step in a new direction by Apple or IBM can reverse these trends. They are both in desperate need of a visionary to keep them from being history.


CAT-300 Repeater Controller

Attention Repeater Owners

Finally a repeater controller with a TI voice synthesizer and full feature autopatch incredibly priced at \$299.00.

Features Include:

- ✓ Voice Synthesizer
- ✓ (412) Word Vocabulary
- ✓ Twelve Voice Messages
- ✓ Two Voice Identifiers
- ✓ CW Identifier
- ✓ Full Feature Autopatch
- ✓ User Speed Dials
- ✓ Emergency Speed Dials
- ✓ Reverse Autopatch
- ✓ DTMF Key Pad Test
- ✓ DTMF Repeater Access
- ✓ DTMF Repeater Muting
- ✓ (56) Control Functions
- ✓ Remote Control Switches
- ✓ Hardware Logic Inputs
- ✓ DVR Controller Ready *
- ✓ Female Voice & Sound Effects
- ✓ Programmable Courtesy Tones
- ✓ Programmable Codes and Timers



* (Requires MF-1000 Serial Interface Card \$59.00)

Write or Call for a brochure describing the CAT-300 Controller, including schematic, voice word list, and control functions.

CAT-300 Controller Board \$299.00 Wired and Tested

Computer Automation Technology, Inc.

4631 N.W. 31st Avenue, Suite 142, Fort Lauderdale, Florida 33309
(305) 978-6171

CIRCLE 268 ON READER SERVICE CARD

TRANSMITTER LOCATION

Direction Finding System Tracks Down

- Stuck Microphones
- Cable TV Leaks
- Jammed Repeaters & Cell Sites

Models available with computer interface, synthesized speech, for fixed or mobile use, covering 50 MHz to 1 GHz. Call or fax for details



DOPPLER SYSTEMS, INC.
P.O. Box 2780
Carefree, Arizona 85377
Tel: (602) 488-9755
Fax: (602) 488-1295

CIRCLE 13 ON READER SERVICE CARD

TOLL FREE 1-800-666-0908 PRICING AND ORDERS ONLY

FT-11R



FT-840



YAESU

NEW!

FT-51R



FT-2200



FT-2500M



FT-530



FT-1000

FT-900AT
Compact HF Transceiver
Remote Front Panel Design



FT-990



FT-5100
FT-5200



FT-890AT

CALL FOR ALL YAESU RADIOS & ACCESSORIES

NEW EQUIPMENT PRICING AND ORDERS 1-800-666-0908 OUT OF STATE
TECHNICAL, USED GEAR, INFO 203-666-6227 24HR FAX 203-667-3561

Hours:

M-F 10-6,
SAT. 10-4

LENTINI COMMUNICATIONS INC.

21 GARFIELD STREET, NEWINGTON, CT 06111



C.O.D.s
OK Same Day
Shipping

CIRCLE 234 ON READER SERVICE CARD

73 Amateur Radio Today • March, 1995 77

SPECIAL EVENTS

Number 21 on your Feedback card

Ham Doings Around the World

ANNOUNCEMENT

WASHINGTON, DC The Foundation For Amateur Radio, Inc., a non-profit organization with headquarters in Washington DC, plans to administer 56 scholarships for the academic year 1995-1996, to assist licensed Radio Amateurs. Licensed Radio Amateurs may compete for these awards if they plan to pursue a full-time course of studies beyond high school and are enrolled in or have been accepted for enrollment at an accredited university, college or technical school. The awards range from \$500-\$2000 with preference given in some cases to residents of specified geographical areas or the pursuit of certain study programs. Additional info and an application form may be requested by letter or QSL card, postmarked prior to April 30th, 1995, from FAR Scholarships, 6903 Rhode Island Avenue, College Park MD 20740.

MAR-APR

ST. LOUIS COUNTY, MO The 1995 SKYWARN weather observer training seminars, sponsored by St. Louis County Emergency Management, are as follows: Basic SKYWARN Class: Mar. 21, 7 PM-10 PM; Apr. 10, 7 PM-10 PM; Apr. 22, 9PM-Noon. Advanced SKYWARN Class: Apr. 19, 7 PM-10 PM; Apr. 22, 1 PM-4 PM. Damage Assessment: Apr. 29, 1

PM-4 PM. All classes are open to everyone, and certification is provided. For more info, contact Mike Redman KAOYXU, P.O. Box 16673, Clayton MO 63105. Tel. (314) 889-2362.

MAR 5

CLEVELAND, OH The Cleveland Winterfest will be at the Cuyahoga County Fairgrounds, Berea OH, 8 AM-2 PM. Set-up at 6 AM. VE Exams will be administered early; bring proper IDs, a copy of your license, and a check payable to ARRL/VEC. DXCC/WAS QSL Checking. Talk-in on 146.73. Contact Hamfest Assn. of Cleveland, P.O. Box 81252, Cleveland OH 44181-0252. Tel. (800) CLE-FEST (253-3378); or 999-7388 in the Cleveland area.

MAR 10

ST. LOUIS, MO The Jefferson Barracks ARC will host their 35th annual Ham Radio Auction starting at 7:30 PM at Concordia Turners Hall, 6432 Gravois Ave. Talk-in on 146.34/94 or 144.61/145.21. Contact Carl H. Hohenberger WB0BZP, 5266 Parker Ave., St. Louis MO 63139-1340. Tel. (314) 351-7084.

MAR 11

FARGO, ND Red River Radio Amateurs will present their Amateur Radio/

Listings are free of charge as space permits. Please send us your Special Event two months in advance of the issue you want it to appear in. For example, if you want it to appear in the March issue, we should receive it by October 31. Provide a clear, concise summary of the essential details about your Special Event.

Computer Electronics Fair at the West Fargo Fair Ground, 8 AM-3 PM. VE Exams start at 1 PM; pre-registration required. Talk-in on W0LO 146.76(-). Contact A.R.C.E.F. '95, P.O. Box 3215, Fargo ND 58108-3215.

MAR 11-12

CHARLOTTE, NC The Mecklenburg ARS welcomes you to the 1995 Charlotte Hamfest/ComputerFair and ARRL Roanoke Div. Convention. Location: Charlotte Merchandise Mart, 2500 E. Independence Blvd., in Liberty Hall, (US 74). Hours: Sat. 9 AM-5 PM; Sun. 9 AM-2 PM. VEC FCC Exams Mar. 12th; pre-register, or walk-ins accepted as space permits. Contact Charlotte Hamfest, P.O. Box 221136, Charlotte NC 28222-1136. Tel. (704) 841-HAMS. Talk-in on W4BFB, 144.69/145.29.

MAR 12

BRISTOL, CT The Insurance City Rptr. Club Inc. will hold its annual Hamfest Flea Market from 9 AM-1 PM (snow date Mar. 19th), at Bristol Eastern H.S., King St. (RT 229). Talk-in on 146.88 and 224.80. To reserve tables, send an SASE to Al Gerke N1JWF, 63 N. Washington St. Apt. 2, Plainville CT 06062-1921; or call (203) 747-1925. VE Exams at 10 AM; no walk-ins. To register, send

an SASE to ICRC, P.O. Box 165, Pleasant Valley CT 06063.

INDIANAPOLIS, IN The Indiana Hamfest & Computer Show will be held at Indiana State Fairground's Pavilion Bldg., by the Morgan County Rptr. Assn. Doors open at 8 AM. Talk-in on 147.06. For table reservations or info, send an SASE before Feb. 21st, to Deanne Martin N9TEJ, 39 Lake Shore Dr. #14, Martinsville IN 46151. Tel. (317) 342-4307.

MAR 18-19


MIDLAND, TX The Midland ARC will hold their annual St. Patrick's Day Swapfest Sat. from 9 AM-5 PM; Sun. 8 AM-2:30 PM at Midland County Exhibit Bldg. Flea Market. T-hunts. VE Exams at 12 PM Sat. Contact Midland ARC, P.O. Box 4401, Midland TX 79704.

MAR 19

JEFFERSON, WI The Tri-County ARC annual Hamfest will be held at Jefferson County Fairgrounds, starting at 8 AM. Set-up at 7 AM. Contact W9MQB, 213 Frederick St., Fort Atkinson WI 53538. Tel. (414) 563-6381 eves.

LEXINGTON, MA A Ham Radio Flea-market will be held at Westboro MA H.S., by the Minuteman Rptr. Assn., 10 AM-2 PM. Set-up 8 AM-10 AM. Walk-in VE Ex-

PC HF FACSIMILE 7.0 \$99

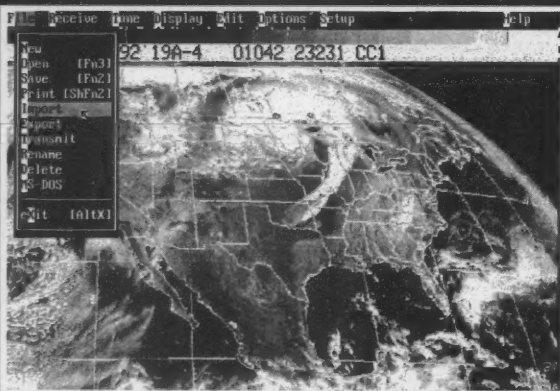

Now under Windows or DOS

PC HF Facsimile is a simple, yet comprehensive software fax system for the IBM PC and compatibles. It includes an FSK demodulator, advanced signal processing software, tutorial cassette, and complete reference manual. With your PC and SSB receiver getting FAX is a snap. Here are just some of the features:

Mouse or Menu Driven
Unattended Operation
Easy Tuning Oscilloscope
Start/Stop Tone Recognition
Up to 256 Levels
Single Scan per Line with EMS Memory
Programmable Colorization
Brightness and Contrast Control
Transmit Option Available
Image Zoom, Scroll, Pan, Rotation

Grayscale on all Popular Printers
Worldwide Broadcast Schedule
Worldwide Frequency Listing
CGA, HGA, EGA, VGA & Super VGA
Time Lapse Frame Looping
Slide Shows
Programmable IOC & Line Rates
Image Cropping
Automatic Control
NAVTEXT & RTTY Option Available

Call or write for our free catalog of products. Visa & MasterCard welcome.

Software Systems Consulting

615 S. El Camino Real, San Clemente, CA 92672
Tel. (714) 498-5784 Fax. (714) 498-0568

CIRCLE 250 ON READER SERVICE CARD

- Packet Radio - Portable & Affordable!



Model BP-1
Packet Modem
Made in U.S.A.

- ★ Simple Installation
- ★ No External Power
- ★ Smart Dog™ Timer
- ★ Perfect For Portable
- ★ Assembled & Tested
- ★ VHF, UHF, HF (10M)

Whether you're an experienced packeteer or a newcomer wanting to explore packet for the first time, this is what you've been waiting for! Thanks to a breakthrough in digital signal processing, we have developed a tiny, full-featured, packet modem at an unprecedented low price. The BayPac Model BP-1 transforms your PC-compatible computer into a powerful Packet TNC, capable of supporting sophisticated features like digipeating, file transfers, and remote terminal access. NOW is the time for YOU to join the PACKET REVOLUTION!

Just...
\$49.95
+Shipping



400 Daily Lane
P.O. Box 5210
Grants Pass, OR
97527

1-800-8BAYPAC

1-800-822-9722
(503) 474-6700

CIRCLE 269 ON READER SERVICE CARD

Number 22 on your Feedback card

NEW PRODUCTS

Compiled by Charles Warrington WA1RZW



ICOM

Work all the HF bands and receive 300 kHz to 29.995 MHz with Icom's next generation IC-738 transceiver. SSB, CW, AM, and FM are built into this rig, which provides a full 100 watts output (40 watts in FM). A heat sink with two large cooling fans ensures stable 100% duty cycle operation—great for DXing marathons.

The IC-738 incorporates next gen-

eration circuitry with Icom's unique Direct Digital Synthesizer (DDS) IC. High-tech and compact, the PLL unit provides precise frequency resolution to 1 Hz. Other features include built-in antenna


tuner, Double Band Stacking Register (DBSR), three scanning functions, passband tuning (PBT), and a notch filter.

The suggested retail price for the IC-738 is \$1,935. For more information, please visit your favorite dealer or contact ICOM America, Inc., 2380-116th Avenue N.E., Bellevue, WA 98004; (206) 454-8155. Or circle Reader Service No. 201.

CCTV

CCTV Corporation has announced the introduction of the GBC CCD-600PH Pincam. This new camera's revolutionary design allows users to place the camera virtually anywhere for completely undetectable surveillance and many ATV applications. The camera is 1-1/2"W x 1-1/2"D x 3/4"D. The Pincam's ultra-miniature size is enhanced by the built-in 3.6mm or 5.5mm pinhole lens.

This camera's built-in electronic shutter automatically compensates for lighting changes. Simply mount the camera behind a 1/16" hole to obtain a clear picture. The Pincam's resolution is over 400 lines, with a sensitivity of 0.2 lux. For more information contact CCTV Corp., 280 Huyler Street, South

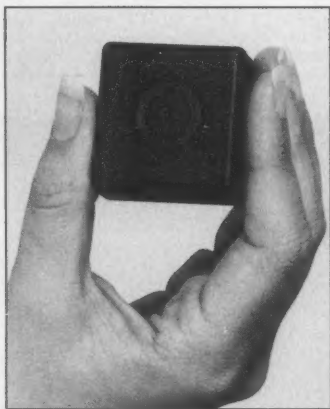

Hackensack, NJ 07606; (201) 489-9595, (800) 221-2240, FAX (201) 489-0111. Or circle Reader Service No. 206.

AEA

Advanced Electronic Applications has begun shipping the new AEA FAX III. The AEA FAX III is a stand-alone, multi-intensity, gray-scale, HF weather fax demodulator and display software package. This product allows amateurs to colorize received weather fax images. This pseudo-color feature allows users to choose from 256 colors to clarify images or just to make them more appealing. Export to GIF or PCX files for manipulation in other graphics programs, then include them in newsletters, letters, or other publications.

This IBM-compatible software receives satellite maps and WEFAX images in 16 levels of gray. It also receives and decodes CW, RTTY, and

NAVTEX transmissions. There are many more features, too. The suggested retail price is \$149. For more information, please visit your favorite dealer or contact Advanced Electronic Applications, Inc., P.O. Box C2160, Lynnwood, WA 98036; 206-774-5554, FAX 206-775-2340. Or circle Reader Service No. 207.



CABLE X-PERTS

CABLE X-PERTS has a new 1995 catalog available for interested amateurs. This catalog provides a lot of technical information on coax cable and related products, prices included. In addition, CABLE X-PERTS has a solution for hams who have difficulty installing PL259 or N type connectors. The company will install these connectors at \$5 per connection plus the cost of the connector on any of their coax cables (except LMR series). All connections are soldered, HI-POT tested, continuity checked, and sealed with UV-resistant heat-shrink tubing. Normal turnaround time is 10 business days.

For a catalog, please mail a Self-



Addressed Stamped Envelope (SASE). For more information contact CABLE X-PERTS, Inc., 113 McHenry Rd., Suite 240, Buffalo Grove, IL 60089-1797; (800) 828-3340 (orders only), (708) 506-1886 (technical info), (708) 506-1970 (FAX). Or circle Reader Service No. 204.



TEKTRONIX

Tektronix, a leader in oscilloscope technology and instrumentation for nearly 50 years, has introduced a complete portfolio of products called TekBench, representing high-value

low-cost products. More than 40 different basic test and measurement products are available in the TekBench portfolio, including oscilloscopes, function generators, universal counters and counter/timers, bench-top multimeters, power supplies, and measurement accessories.

All TekBench instruments are compatible, fully integrated, and have a uniform look and feel for simple, easy use by folks with a wide range of technical skills. For the name of an authorized dealer call 1-800-426-2200 (press "1" when prompted). Or contact Tektronix, P.O. Box 500, Beaverton, OR 97077-0001. Or circle Reader Service No. 203.

MFJ

MFJ Enterprises has introduced the MFJ-114 12/24-hour 2.3" LED digit clock. This clock is so large it could time a football game, but it is really made for the ham shack. It features giant 2.3" red LED digits—nearly the width of a 2 meter handheld. The display is especially bright, too.

The MFJ-114 can be mounted to the wall or the ceiling, and the clock is easy to operate. It is powered from house current and features a battery




backup. The price is \$39.95. For more information or to order, visit your favorite dealer or contact MFJ Enterprises, Inc., P.O. Box 494, Mississippi State, MS 39762; (601) 323-5869, FAX (601) 323-6551, or toll free 800-647-1800 (orders only). Or circle Reader Service No. 205.

ARTSCI

ARTSCI's 1995/1996 U.S. Repeater MapBook is the perfect traveling companion for the radio enthusiast. This 5th edition has been totally redesigned to better serve the traveling amateur. New highly detailed maps enhance the presentation of the popular amateur repeaters. In an effort to show every open repeater, a detailed city-by-city listing accompanies every state map.

Maps show all major highways and cities in each state. New in this year's edition are table listings of all open repeaters in each state. Ask for the new MapBook at your favorite dealer or contact ARTSCI Inc., P.O. Box 1428, Burbank, CA 91507; (818) 843-4080,

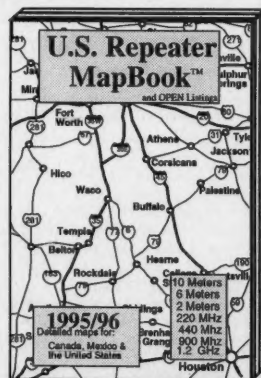

FAX (818) 846-2298. Or circle Reader Service No. 202.

BARTER 'N' BUY

Number 23 on your Feedback card

Turn your old ham and computer gear into cash now. Sure, you can wait for a hamfest to try and dump it, but you know you'll get a far more realistic price if you have it out where 100,000 active ham potential buyers can see it than the few hundred local hams who come by a flea market table. Check your attic, garage, cellar and closet shelves and get cash for your ham and computer gear before it's too old to sell. You know you're not going to use it again, so why leave it for your widow to throw out? That stuff isn't getting any younger!

The 73 Flea Market, Barter 'n' Buy, costs you peanuts (almost)—comes to 35 cents a word for individual (noncommercial) ads and \$1.00 a word for commercial ads. Don't plan on telling a long story. Use abbreviations, cram it in. But be honest. There are plenty of hams who love to fix things, so if it doesn't work, say so.

Make your list, count the words, including your call, address and phone number. Include a check or your credit card number and expiration. If you're placing a commercial ad, include an additional phone number, separate from your ad.

This is a monthly magazine, not a daily newspaper, so figure a couple months before the action starts; then be prepared. If you get too many calls, you priced it low. If you don't get many calls, too high.

So get busy. Blow the dust off, check everything out, make sure it still works right and maybe you can help make a ham sure it still works right and maybe you can help make a ham newcomer or retired old timer happy with that rig you're not using now. Or you might get busy on your computer and put together a list of small gear/parts to send to those interested?

Send your ads and payment to the Joyce Bocash, 73 Magazine, Barter 'n' Buy, 70 Rt. 202N, Peterborough NH 03458 and get set for the phone calls.

The deadline for the May 1995 classified ad section is March 9, 1995.

ALL ABOUT CRYSTAL SETS. Theory and construction of crystal set radios. \$9.95 each, ppd USA. Send to: **ALLABOUT BOOKS**, Dept. S, P.O. Box 22366, San Diego CA 92192. BNB200

DWYER WIND SPEED INDICATOR only \$55.00 plus \$4.00 S/H. For home or office. Accurate, low-cost, practical. Roof mounted pickup. Send check or M.O. to: **RAD-MON COMPANY**, Dept A, Box 751, Marathon NY 13803-0751. (NY Residents add Sales Tax) BNB285

COMMODORE 64 REPAIR. Fast turn around. **SOUTHERN TECHNOLOGIES AMATEUR RADIO**, 10715 SW 190th Street #9; Miami FL 33157. (305)238-3327. BNB295

WANTED: Electron Tubes, ICS, Semiconductors. **ASTRAL**, P.O. Box 707ST, Linden NJ 07036. Call (800)666-8467. BNB307

KENWOOD AUTHORIZED REPAIR. Also ICOM, Yaesu. **GROTON ELECTRONICS**, Box 379, Groton MA 01450. (508)448-3322. BNB310

UNIQUE INDOOR/OUTDOOR ANTENNA gives 30 dB gain on 160m-10m. Plans: \$6.95. **BOB CHRISTIE AA2KE**, 215-28 Spencer Ave., Queens Village NY 11427. BNB319

NOW ON 80 METERS! New, knob-tuned w/digital display, synthesized QRP transceiver. Complete kit only \$199.95. S&H \$6.50 (continental US). **GUARANTEED TO WORK.** For info send SASE: Call/write to order: **S & S ENGINEERING**, 14102 Brown Road, Smithsburg MD 21783; (301)416-0661. BNB334

Continued on page 82

PROPAGATION

Number 24 on your Feedback card

Jim Gray W1XU

Jim Gray W1XU
210 East Chateau Circle
Payson AZ 85541

HF propagation this month is expected to be Poor (P) or Very Poor (VP) on the days 9-12 and again 15-17. The Good (G) days for DX are likely to occur during the first five days and the last two weeks of the month. The remaining days will be days of transition.

Although March is traditionally a good month for DX because of the approaching equinox and increasingly favorable springtime ionization of the upper atmosphere, we are now approaching the lowest part of Sunspot Cycle 22... expected in late 1995 or early 1996. That means less overall ionization and fewer opportunities for worldwide HF communication, particularly on the 17, 15, 12 and 10 meter bands. Better directional antennas and a careful choice of operating hours will be required to maximize DX opportunities.

10 and 12 Meters

Occasional F2 openings to the Southern Hemisphere during daylight hours. The bands close at sunset.

15 and 17 Meters

Consistent openings to Africa and Latin America, and short skip to about 1,000 miles during daylight. Bands close at sunset or shortly after.

20 Meters

Your best band for DX to all areas of the world between sunrise and well past sunset, and short skip to 2,000 miles during daylight hours.

30 and 40 Meters

Good DX from slightly after local sunset to just before local sunrise. Signals from the east peak between sunset and midnight, and from all other areas between midnight and sunrise. Daytime short skip to 1,000 miles, and nighttime skip to 2,500 miles.

80 and 160 Meters

Good DX from sunset to sunrise on nights of low atmospheric noise, and skip to 2,000 miles or so. Requires vertical transmitting antennas and horizontal (preferably Beverage) antennas for best results on receiving. Little, if any, daylight activity on 160, but some on 80 meters.

Final comments require me to warn

of possibly violent weather and other geophysical occurrences centered around the 9th and 10th, and again around the 16th and 17th. Hang on to

your hats! As always, check WWV at 18 minutes after any hour for the latest updates on propagation. See you here next month.

EASTERN UNITED STATES TO:

GMT:	00	02	04	06	08	10	12	14	16	18	20	22
ALASKA							20	20				
ARGENTINA								15	15	15	15	15
AUSTRALIA						40	20	20			15	15
CANAL ZONE	20	40	40	40	40		20	15	15	15	15	20
ENGLAND	40	40	40				20	20	20	20		
HAWAII		20			40	40	20	20				15
INDIA							20	20				
JAPAN							20	20				
MEXICO		40	40	40	40		20	15	15	15	15	
PHILIPPINES							20	20				
PUERTO RICO		40	40	40			20	15	15	15	15	
SOUTH AFRICA									15	15	15	
U.S.S.R.							20	20				
WESTCOAST			80	80	40	40	40	20	20	20		

CENTRAL UNITED STATES TO:

ALASKA	20	20						15				
ARGENTINA									15	15	15	
AUSTRALIA	15	20				40	20	20				15
CANAL ZONE	20	20	40	40	40	40			15	15	15	20
ENGLAND		40	40					20	20	20	20	
HAWAII	15	20	20	20	40	40	40					15
INDIA								20	20			
JAPAN								20	20			
MEXICO	20	20	40	40	40	40			15	15	15	20
PHILIPPINES								20	20			
PUERTO RICO	20	20	40	40	40	40			15	15	15	20
SOUTH AFRICA										15	15	20
U.S.S.R.								20	20			

WESTERN UNITED STATES TO:

ALASKA	20	20	20		40	40	40	40				15
ARGENTINA	15	20		40	40	40						15
AUSTRALIA		15	20	20			40	40				
CANAL ZONE			20	20	20	20	20	20				15
ENGLAND									20	20		
HAWAII	15	20	20	40	40	40	40					15
INDIA		20	20									
JAPAN	20	20	20		40	40	40				20	20
MEXICO			20	20	20	20	20					15
PHILIPPINES	15						40		20			
PUERTO RICO			20	20	20	20	20	20				15
SOUTH AFRICA										15	15	
U.S.S.R.									20			
EAST COAST	80	80	40	40	40	40	40	20	20	20		

MARCH 1995

SUN	MON	TUE	WED	THU	FRI	SAT
			1 G-F	2 F	3 F-G	4 G-F
5 F	6 F	7 F-P	8 P-VP	9 VP	10 VP	11 VP-P
12 P	13 P-F	14 F-P	15 P	16 P-VP	17 VP-P	18 P-F
19 F	20 F-G	21 G	22 G-F	23 F	24 F-G	25 F-G
26 F-G	27 G	28 G	29 G	30 G	31 G	

TNT FIELD DAY ANTENNA
complete, assembled/ready to use.

No pruning, No tuning, No knobs to twist.
TNT is No-tune on 80, 40, 20, 17, 12, 10. TNT/2 is No-tune on 40, 20, 10. Work other bands w/ tuner. DX & Gain rise w/ frequency.
Ready to Use Includes isolation balun & 99 ft RCA. The modern coax-fed version of the classic off-center fed window. Includes 12-45 ppt.

Kink-proof
Wx-Sealed
Low Noise

No Traps or Resistors
Insulated to 3000 V
Rated 500 Watts

TNT Window \$89.95 + \$8 P&H
TNT/2 Window \$79.95 + \$7 P&H
Order Hotline 801-373-8425

Antennas West
Box 50062S, Provo, UT 84605

CIRCLE 135 ON READER SERVICE CARD

UHF REPEATER

Make high quality UHF repeaters from GE Master II mobiles!

- 40 Watt Mobile-Radio \$199
- Duplexing and tuning information \$12
- Information without radio \$40

Versatel Communications
Orders 1-800-456-5548 For info. 307-266-1700
P.O. Box 4012 • Casper, Wyoming 82604

CIRCLE 259 ON READER SERVICE CARD

ATV CONVERTERS • HF LINEAR AMPLIFIERS

DISCOVER THE WORLD OF FAST SCAN TELEVISION

70 CM 33 CM

AMATEUR TELEVISION CONVERTERS
ATV3 420-450 (GaAs-FET) \$ 49.95 Kit
ATV4 902-928 (GaAs-FET) \$ 59.95 Kit

2 METER VHF AMPLIFIERS
35 Watt Model 335A \$ 79.95 Kit
75 Watt Model 875A \$119.95 Kit
Available in kit or wired/tested

HF AMPLIFIERS per MOTOROLA BULLETIN
Parts List for HF Amplifiers (2-30MHz)
Described in the MOTOROLA Bulletins:
AN758 300W AR313 300W
AN762 140W AR305 300W
AN779L 20W EB63 140W
AN779H 20W EB27A 300W
EB104 600W

New!! 1K WATT 2-50 MHz Amplifier
POWER SPLITTERS and COMBINERS 2.3MHz
600 Watt PEP 2-Port \$ 69.95
1000 Watt PEP 2-Port \$ 79.95
1200 Watt PEP 4-Port \$ 89.95

100 WATT 420-450 MHz PUSH-PULL LINEAR AMPLIFIER - SSB - FM ATV
KEB67-PK (Kit) \$159.95
KEB67-PCB (PC Board) \$ 18.00
KEB67-I (Manual) \$ 5.00

UNIVERSAL DIGITAL FREQUENCY READOUT
TK-1 (Wired/tested) \$149.95

HEAT SINK MATERIAL
Model 99 Heat Sink (6.5 x 12 x 1.6) \$ 24.00
CHS-8 Copper Spreader (8 x 6 x 3/8) \$ 22.00

We stock Hard-to-Find parts
CHIP CAPS-Kemet/ATC
METALCLAD MICA CAPS-Unelco/Semco
RF POWER TRANSISTORS
ARCO TRIMMER CAPACITORS
BROADBAND HF TRANSFORMERS

MINI-CIRCUIT MIXERS
SBL-1 (1-500MHz) \$ 6.50
SBL-1X (10-1000MHz) \$ 7.95

Low Pass Filters
for Harmonics (Up to 300W)
10m, 15m, 20m, 40m, 80m & 160m

For detailed information and prices, call or write for our free catalog.


CCl Communication Concepts Inc.
508 Millstone Drive • Beavercreek, Ohio 45434-5840
(513) 426-8600 • FAX (513) 429-3811

CIRCLE 99 ON READER SERVICE CARD

Use Your Reader Service Card Today! Our Advertisers Want To Hear From You!

Pocket Morse Code Trainer

**Learn Code Faster & Easier
Better than code tapes
Take it anywhere to practice
Ideal for beginners to advance**



- Features:**
- Code rates from 3 to 31 wpm
 - Plays standard or Farnsworth.
 - Dimensions 1" x 3.8" x 2.4"
 - Runs 40 hr on one 9v battery
- 3 Modes of Operation**
1. Continuous fresh random code.
 2. Random code practice test.
 3. Interactive training mode

Only \$29.00

Deluxe Pocket Morse Code Trainer

6 Modes of Operation \$49.00
The deluxe unit has 3 additional modes

4. Continuous newly generated QSO.
 5. Practice code exams just like the real code test. (incl. answer key to check accuracy)
 6. Continuous random words
- Computer Aided Technology Visa/MC, Add \$5 S&H
10132 Monroe Dr., Dallas, Tx 75229 PH 214-530-0888

CIRCLE 276 ON READER SERVICE CARD

Now you can do something about the weather

Our ULTIMETER-II Weather Station protects your equipment, gives you up-to-the-second data to transmit on SKYWARN and A.R.E.S. networks.

Tells you when high winds threaten so you can crank down your tower and safeguard other equipment. You get over 20 weather functions:

- Wind Speed and Direction (40 ft. cable)
- Temperature (25 ft. cable)
- Chill Factor
- Alarms • Highs/Lows/times/dates • Metric/English • Optional self-emptying rain gauge • 30-day money back guarantee • One-year warranty

HOME WEATHER STATION Only \$179.00

Add a Second Keyboard/Display Unit...Only \$69.00
NEW! Add our PC DATA LOGGER Only \$69.00
Del. in US add \$8.25 shipping & insurance. NJ res. add 6% tax.

For information or to order with VISA/MC:
TOLL-FREE 1-800-USA-PEET (872-7338)
FAX orders: 908-517-0669
Or send check, m.o. or credit card no. and exp. date to:

PEET BROS. COMPANY 601-5037 Woodland Rd., W. Allenhurst NJ 07711
Free Brochure Our 18th Year ©1993 Peet Bros. Co.

Continued from page 81

RCI-2950/2970: New modification manual including Power increase. Clarifier modification. Modulation increase. Operating hints, and more. Parts included. Only \$20.00 ppd in U.S. (Missouri residents add \$1.15 tax). **SCOTT, P.O. Box 510408, St., Louis MO 63151-0408. (314)846-0252. Money Orders or C.O.D. BNB340**

HR2510, RCI2950, CONNEX 3300, COBRA 148, GALAXY SATURN, plus many more kits to increase your modulation, \$19.95. **(800)536-0109. BNB350**

QSL CARDS — Standard and custom. Your ideas or ours. Excellent quality. Foil stamping available. Many designs and type styles. Catalog and samples \$1.00 refundable. **WILKINS, Dept. A, Box 787, Atascadero CA 93423. BNB370**

IT'S BACK! The return of the HW-8 Handbook! Second printing. Modifications for the Heath QRP rigs. First class mail \$11. DX add \$4 for air mail shipping. **Mike Bryce, WB8VGE, 2225 Mayflower NW, Massillon OH 44647. BNB404**

BUTTERNUT ANTENNAS, NEW, in box. 2 left—H72V, \$175; 3 left—H75B, \$250. (210) 435-6190. **BNB435.**

HAMS—NEED COMPUTER RIBBONS? Lowest prices. Color or black. State your needs. Free info. Special deal for clubs. **HARCLY(C), P.O. Box 830A, Coquille, OR 97423. BNB457**

WHY RISK FAILURES With Aerial Supports? Dacron rope, high UV resistant, non-stretch Military Type black DOUBLE (unlike our competitors' single) braided. 1-800-328-4773. **BNB557**

DUPLEXER TUNING GUIDE. A complete booklet showing step-by-step instructions on tuning all types of duplexers. Included is theory of operation, detailed diagrams and much more. Send \$9.95 plus \$2.50 s&h to **RGM PUBLICATIONS, 533 Main Street, Hillsboro NM 88042.** For faster service using a major credit card call (505)895-5333 and order today. 30 day money back guarantee. **BNB635**

FOR SALE Icom IC-2SAT, IC-W2A, PK-88 Laptop computer, personal autopatch, Epson Printer. Anthony Nota, (201)284-1105. **BNB675**

HAM RADIO REPAIR- All makes and models. Fast, Professional Service. **AFFORDABLE ELECTRONIC REPAIR, 7110 E. Thomas Rd., Scottsdale AZ 85251. (602)945-3908. BNB700**

ROSS' \$\$\$\$ NEW MARCH (ONLY) SPECIALS
ROTOR SALE CD-45II, \$230; Orion OR-2300, \$850; send stamp for complete list. Alinco DJ-580T, \$385; ALM-203, \$209.99; EBP-12NA, \$52; DJ-F1T, \$255; DJ-G1T, \$285; DJ-120T, \$190; ALM 203T, \$209.99; Standard CCR-708A, \$710; C-228A, \$530; C-5608DA, \$760; Yaesu, in stock; ICOM BC-50U, \$50.50; BP-21, \$30; BP-22, \$34.50; BP-23, \$28.50; LC-14, \$11.50; MFJ 815B, \$50; 49EY, \$120; Ameritron ALS-500M, \$729; Bencher BY-2, \$72; XZ-2, \$50; ST-3, \$150; ST-1, \$55; ST-2, \$70; Butternut A17-12, \$44.50; 30 MRK, \$44.50; Cushcraft 220-SK, \$60; AR2, \$33; 230 VPK, \$100; RF Concepts VHF1-60, \$200; 3-22B, \$120; Mirage C22A, \$110; C211, \$230; C106, \$150; C1012, \$215; Larsen, in stock; 500 ft. RG-213, \$150; Drake E7000, \$300. **LIMITED TIME OFFERS. LOOKING FOR SOMETHING NOT LISTED OR HARD TO FIND?**

CALL OR WRITE. Over 8,800 ham-related items in stock for immediate shipment. Mention ad. Prices cash, F.O.B. Preston. HOURS: TUESDAY-FRIDAY 9:00 TO 6:00, 9:00-2:00 P.M. MONDAYS. CLOSED SATURDAY & SUNDAY. **ROSS DISTRIBUTING COMPANY**, 78 SOUTH STATE, PRESTON ID 83263. (208) 852-0830. BNB707

ELECTRON TUBES: All types and sizes. Transmitting, receiving, microwave... Large inventory = same day shipping. **DAILY ELECTRONICS**, 10914 NE 39th ST. Suite B-6, Vancouver, WA 98682. (800)346-6667 or (360)896-8856.

BNB719A

MINIATURE POLICE RADAR TRANSMITTER One mile range, \$41 assembled, \$31.00 kit. 9025 Coldwater Rd. Bldg. 100A, Fort Wayne IN 46825.

BNB719B

HAM RADIO REPAIR—Prompt service. **ROBERT HALL ELECTRONICS**, 1660 McKee Rd., Suite A, San Jose CA 95116. (408)729-8200. BNB751

WANTED: HAM EQUIPMENT AND RELATED ITEMS. Donate your excess gear, new-old-in-any-condition to the Radio Club of Junior High School 22, the nation's only full-time, nonprofit organization working to get ham radio into schools around the country as a teaching tool using our EDUCOM—Education Thru Communication—program. Send your radio to school. Your donated material will be picked up ANYWHERE or shipping arranged, and this means a tax deduction to the full extent of the law for you as we are an IRS 501(c)(3) charity in our 15th year of service. It is always easier to donate and usually more financially rewarding, BUT MOST IMPORTANT your gift will mean a whole new world of educational opportunity for children nationwide. Radios you can write off, kids you can't. Start 1995 by helping a child and yourself. Write, phone or FAX the WB2JKJ "22 Crew" today: The RC of JHS 22, P.O. Box 1052, New York NY 10002. 24 hours call (516) 674-4072 or FAX (516) 674-9600. Meet us on the **WB2JKJ CLASSROOM NET**, 7.238 MHz 1200-1330 UTC daily and 21.395 MHz from 1400 to 2000 UTC. Look for us this month at the Charlotte NC Hamfest.

BNB762

PACKET RADIO Join TAPR, connect with the largest packet/digital group in the US. Creators of the TNC-2 standard. Benefits: newsletter, software, discount on kits/publications. \$15/year US, \$18 Can/Mex, \$25 elsewhere Visa/MC. When joining, mention 73, receive TAPR's new book, *Packet Radio: What? Why? How?* (\$9 value) FREE! (817)383-0000. Mail: 8987-309 E. Tanque Verde Rd. #337, Tucson AZ 85749-9399. BNB765

SERIOUS ABOUT SOLAR POWER? The PVSP starter kit comes with a 32 watt Solarex VLX panel and a ten amp Sunlogic charge controller. Special introductory price \$275 plus \$7 shipping. **SUNLIGHT ENERGY SYSTEMS**, 2225 Mayflower NW, Massillon OH 44647. BNB774

R-390A—SALES—SERVICE—PARTS. Info SASE: **MILTRONIX**, P.O. Box 3541, Toledo OH 43608. BNB813

FREE IBM SHAREWARE AND HAM CATALOG. Morse Code Computer Interfaces, \$49.95. **DYNAMIC ELECTRONICS**, Box 896, Hartselle AL 35640. (205)773-2758, FAX (205)773-7295. BNB815

CB-TO-10 METERS

We specialize in CB radio modification plans and hardware. Frequency and FM conversion kits, repair books, plans, high-performance accessories. Thousands of satisfied customers since 1976! Catalog \$3.

CBC INTERNATIONAL

LOU FRANKLIN/K6NH Owner
P.O. BOX 31500X PHOENIX AZ 85046

A Half WHAT?

That's what he asked. Twice. I was the only DL he could hear on the band that 1st morning of the all-Asia contest. Same for another 40 JA's till the DL's with linears and quads finally got through. My 15 meter HalfSquare hung unnoticed under the eaves. Nice to be heard, not seen. Nicer to work DX without tower or amplifier. When you order add \$5 P&H.

10M \$39.95 15M \$44.95 20M \$49.95 40M \$69.95
AntennasWest Order Hot Line
Box 50062-S, Provo, UT 84605 800-826-7373
Plans, patterns technical details in TechNote #122B \$5.95 ppd USA

CIRCLE 89 ON READER SERVICE CARD

▼ ELECTROMAGNETIC FIELD METER ▼

Reduce exposure to potentially harmful electromagnetic fields. AlphaLab's handheld TriField™ Meter measures AC electric fields, AC magnetic fields and radio/microwave power density. Find ground faults, AC current wires or measure high-field generators with the **Magnetic** setting (.2 – 100 milligauss, 60 Hz); identify poorly grounded or shielded equipment, high VDT or fluorescent light fields, distinguish hot vs. ground wires with **Electric** setting (.5 – 100 kV/m, 60 Hz); measure antenna radiation patterns, leaky microwave ovens, etc. on **RF/microwave** setting (50 MHz to 3 GHz, .01 to 1 mW/cm²).

Electric and magnetic settings are omnidirectional, measuring full magnitude of fields without the need to reorient the meter. Price of \$145 includes delivery and one-year warranty.


AlphaLab, 1280 South 300 West, Salt Lake City, UT 84101
Call (810) 532-6604 for speedier service or free literature on electromagnetic radiation health risks.



SELL YOUR PRODUCT IN 73 MAGAZINE CALL DAN HARPER 800-274-7373

"DESIGNING A YAGI HAS NEVER BEEN SO EASY!"

... 73 Amateur Radio Today, April '94

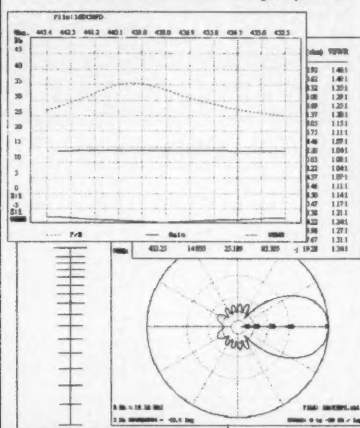

Why spend big \$\$ on unfriendly, overpriced and very slow optimize-only software ???

QuickYagi, the high speed, low cost, easy-to-use software features auto design & optimize plus performance analysis. With amazing accuracy, it will accommodate 17 elements, Freq. to 1 GHz., mntg/boom and tapered element modeling, folded dipole, scalar, and prints all files, polar plots and graphs. Both co-proc. & no co-proc. versions are included. For PC-AT w/ 840 K RAM, VGA, EGA, CGA, Hercules and DOS 3.0 or higher

QuickYagi™ v3.1 \$39.95*
By WA7RAI

Add \$3.00 s&h or \$5.00 for non-USA orders • Incl. Callsign worder
Send SASE for complete info. • US Check or International Money order
Arizona orders add 5.5% state tax • Specify 3.5" or 5.25" floppy disk

RAI Enterprises (602) 435-9523
5638 W. Alice Av. Glendale, AZ 85302

CABLE X-PERTS, INC.

DC POWER SUPPLIES REGULATED

SECOM-6
\$29.95/each

SECOM-11
\$61.95/each

SECOM-14
\$71.95/each

SECOM-20
\$88.95/each

Input Voltage	117VAC	
Output Voltage	13.8VDC	
Output Current	Duty Cycle	Continuous
SECOM-6	6AMPS	4AMPS
SECOM-11	11AMPS	8AMPS
SECOM-14	14AMPS	10AMPS
SECOM-20	20AMPS	15AMPS

50% DUTY CYCLE 5 MINS "ON" 5 MINS "OFF"

• FEATURES
• OVER VOLT PROTECTION
• OVER CURRENT PROTECTION
• SHORT CIRCUIT PROTECTION
• EXTERNAL FUSE
• RED & BLK BINDING POST

+ Cigarette Lighter Receptacle on Secom-6 only.

WARRANTY ONE YEAR Plus Shipping

More items stocked

See CABLE X-PERTS other advertisement!

ORDERS ONLY: 800-828-3340

Tech Info: 708-506-1886 Fax: 708-506-1970

113 McHenry Rd. Suite 240

Buffalo Grove, IL 60089-1797

Complete Literature Mail #10 SASE

Silent Solar Power

The \$349.00 Bullet-Tested QRV Solar Power Supply keeps your repeater on the air 'round the clock or powers your 100w HF station 60 hrs a month. Control circuit speeds charge, protects gel cells & sealed batteries. Fully assembled, QRV, portable. Easily expanded.

Add \$10 S&H Info \$1
AntennasWest
(801)373-8425 Box 50662, Provo UT 84605

CIRCLE 336 ON READER SERVICE CARD

OVER A MILLION CALL SIGNS "ONLINE" U.S. INTERNATIONAL CALL DIRECTORY

Hamcall online service gives you access to over a million hams via your computer & modem. Updated each month! **Only \$29.95** per year. Unlimited use - 24 hours a day - you pay for the phone call.

800-282-5628 703-894-5777 FAX 703-894-9141

BUCKMASTER
Route 4, Box 1630 - Mineral, Virginia 23117
Internet: info@buckm.com

CIRCLE 7 ON READER SERVICE CARD

Sell your product in 73 Amateur Radio Today!

Call Dan Harper today...

1-800-274-7373

JAZZ UP YOUR REPEATER

- Give your repeater a variety of tail messages
- Pre-schedule announcements of special events
- Voice mail feature
- Control remotely via DTMF
- Digital packet cluster info converted to voice
- In use world-wide
- Complete system - computer board and software for \$259 U.S.
- Many interesting features - call for information package

1-800-563-5351 Toll Free From USA
1-306-781-2008 FAX

1-306-781-4451
1-306-781-2070

Direct
BBS

DIGITAL COMMUNICATIONS INC.

P.O. Box 293, White City, SK, Canada S0G 5B0

CIRCLE 161 ON READER SERVICE CARD

- T-shirt 100% preshrunk cotton
- Sweatshirt 50/50 cotton blend
- T-shirts \$14.95 + \$3 S/H
- Sweatshirts \$26.95 + \$4 S/H
- Sizes M L XL (XXL \$2 more)
- \$2 discount on multiple orders
- Visa/MC Purchases Shipped next day
- Ca residents add 7.75% tax
- Return item in 30 days for full refund



HELP TO PUBLICIZE HAM RADIO

Our full color design makes the point that when an emergency strikes you can count on Ham Radio operators to keep the lines of communication open. Join with hams all over America who are proudly wearing our new shirt design. Place your orders today.

Ray Sarrio WB6SIV
6147 Via Serena St.
Rancho Cucamonga, CA 91701
24 hr. order line **1-800-413-1129**
or call 1-909-987-1020

CIRCLE 300 ON READER SERVICE CARD

Why buy a TNC?

PC HF FAX + PC SWL \$179.00

SPECIAL COMBINATION OFFER

For a limited time, if you order PC HF FAX \$99 (see our other ad in this issue), you can add our new and improved PC SWL 3.0 for \$80.00 instead of our regular low price of \$99.00.

PC SWL contains the hardware, software, instructions and frequency lists needed to allow you to receive a vast variety of digital broadcasts transmitted over shortwave radio. All you need is any IBM PC or compatible computer and an SSB shortwave receiver. The product consists of:

- Demodulator
- Digital Signal Processing Software
- 200 Page Tutorial Reference Manual
- World wide Utility Frequency List
- Tutorial Audio Cassette with Samples

PC SWL automatically decodes Morse code, RTTY, AMTOR, SITOR, NAVTEX and ASCII.

PC SWL lets you tune in on world press services meteorological broadcasts, ham radio operators, coastal shore stations, aviation telex and much more digital action on the shortwave bands. Why pay for another expensive box when a simple interface and your PC can do the job?

ADVANCED FEATURES:

- Tuning Oscilloscope
- Digital Waveform Presentations
- Auto Calibration and Code Recognition
- Continuously Tunable Filter Frequencies
- Variable Shift
- Adjustable CW Filter Sensitivity
- Unattended Capture and Printing
- Integrated Text Editor
- Integrated Log and Database
- Shell to DOS applications
- Seamless Integration with PC HF Facsimile

Call or write for our complete catalog of products. Visa & MasterCard welcome.

Software Systems Consulting
815 S. El Camino Real, San Clemente, CA 92672
Tel: (714)498-5784 Fax: (714)498-0568

CIRCLE 244 ON READER SERVICE CARD

THE ANARCHIST'S BBS is a resource for Anarchists, Investigators, Researchers, Computer Hackers and Phone Phreaks. Categories include: Computer Hacking, Investigation Techniques, Telecommunications Technology and Surveillance. Call (214)289-8328 for free trial access.

BNB831

FCC COMMERCIAL LICENSE PREPARATION RADIOTELEPHONE-RADIOTELEGRAPH. Latest home study fast easy audio video. Q & A pool disks. **FREE** details **WPT PUBLICATIONS** (800)800-7588.

BNB840

ELECTRONICS GRAB BAG! 500 pieces of new components: inductors, capacitors, diodes, resistors. \$5.00 postpaid. **ALLTRONICS**, 2300 Zanker Rd., San Jose CA 95131.

BNB855

SGC, INC., an HF SSB radio manufacturer has openings for technical sales and support persons. Must have General Class license, good verbal and written skills. Knowledge of marketing, dealer networks and marine industry helpful. Must be willing to travel. Send resume and salary history to **SGC, Inc.**, P.O. Box 3526, Bellevue, WA 98009 USA.

BNB880

WANTED: BUY AND SELL All types of Electron Tubes. Call (612)429-9397, Fax (612)429-0292. **C & N ELECTRONICS**, Harold Bramstedt, 6104 Egg Lake Road, Hugo MN 55038.

BNB915

COMMODORE 64 HAM PROGRAMS 8 disk sides, over 200 ham programs \$16.95/\$29 stamp gets unusual software catalog of Utilities, Games, Adult and British Disks. **HOME-SPUN SOFTWARE**, Box 1064-BB, Estero FL 33928.

BNB917

RADIO REPAIR Amateur and commercial, professional work. Fred Fisher WF9Q, 6866 W. River Rd., South Whitley IN 46787. (219)723-4435.

BNB930

RF TRANSISTORS, Japanese transistors and tubes need dealers, repair shops, kit makers, etc. for 2SC1969, 2SC2312, MB8719, MRF455, MRF454, 2SC2879 and more. **WESTGATE** (800)213-4563.

BNB950

FREE HAM GOSPEL TRACTS. SASE. **N3FTT**, 5133 Gramercy, Clifton Heights PA 19018.

BNB960

PRINTED CIRCUIT BOARDS for projects in 73, *Ham Radio*, *QST*, *ARRL Handbook*. List SASE. **FAR CIRCUITS**, 18N640 Field Ct., Dundee IL 60118.

BNB966

ROTOR PARTS ROTOR SERVICE, ROTOR accessories: Brak-D-Lays, Quik-Connects, Pre-Set mods. **NEW** models for sale. Free catalog. **C.A.T.S.**, 7368 State Road 105, Pemberville OH 43450.

BNB996

SECRET CB BOOKS 1-29 \$10 ea., **SAMS** books \$15 ea. Tune up masters books 1-6 \$17 ea., Uniden export service manual \$10, **RCI** 2950/2970 service manual \$10. Call for free catalog of other goodies. **1-800-536-0109**.

BNB999

EMERGENCY COMMUNICATIONS T-SHIRTS in large letters on back with Federally Licensed Radio Operator insignia on front. 100% cotton in Large, XL, XXL. \$18. **1-800-435-3528**.

BNB1002

Avcom PSA-65A Spectrum Analyzer Battery-powered portable 2-1000 MHz w/ 10 kHz resolution filter and carrying case. Purchased for \$3,400 less than two years ago. Used briefly to set up one cable TV installation. Best offer over \$1,200 or trades for 486 PC. **Ira**, (212) 749-7170 after 6 p.m. BNB1003

SELLING: Motorola T1930 10 meter transmitter chassis; P350 RF unit; P353 modulator; P351, P352 power supplies. **Joe**, (708) 894-2482. **SELLING:** Motorola 900 MHz, AM single-channel commercial transceiver, best offer. **Klaus**, (708) 966-4835. **WANTED:** Working ICOM IC-3A or IC-3AT. **Klaus WB9YBM** (708) 966-4835. BNB1004

Budget QSL Cards \$1 for samples (refundable with order) **B.B.B.S.**, 170 North Wilson Road #132, Columbus OH 43228-1263. BNB1005

Native Ukrainian wants to be your Tech Rep in Ukraine or Eastern Europe. Fluent in four languages, BSE degree, highly skilled in IBM/DOS hardware/software networking, LF to UHF communications, antenna and transceiver design. Training or temporary work in the USA to learn your products OK. **KC1VF/USSWE**, (703) 231-6478, P.O. Box 2490, Christiansburg VA 24068. BNB1006

WANTED: Crystal radios, Galena or germanium diode. Factory-built or quality home-brew, pre-1960. (503) 231-9708, or P.O. Box 42351, Portland OR 97242. BNB1007

SCANNER SOURCEBOOK: Nationwide Directory of products available for your scanner. Over 400 listings. 42 pages. Send \$12 or an SASE for info. **GRIFFIN RESEARCH**, 16333 Harbor #110-B, Fountain Valley CA 92708-1311. BNB1008

CODE 5 News and Petition information. SASE to **KB7PNQ**, 503 Dubois Street, Cheney, WA 99004. BNB1012

REPEATER CONTROLLER WITH AUTOPATCH \$99.95. DTMF controllable, long distance phone number reject, four control output lines, two courtesy tones, switch-selectable CW callsign. Kit includes assembled tested board with Intel 8748 MPU, LEDs, TX, RX, phone, power. For info call or write to **JOHN BELL**, 1381 Saratoga St., Minden, NV 89423; (702) 267-2704. BNB1014

AMATEUR RADIO REPAIR, most makes and models, discount labor rates until June 1995. **WESTERN AMATEUR RADIO REPAIR CO.**, John Rupe, Box 697, North Cove, WA 98547; (360) 267-4011. Thanks, AB7DR. BNB1015

MINT SHEETS: RARE 1964 AMATEUR RADIO STAMPS. \$25 ea., plus \$3 S & H. Suitable for framing. **K5RDP**, Gene, (512) 321-2005. BNB1016

**Sell your products in
73 Amateur Radio Today.**

**For details call
Dan Harper
at (800) 274-7373.**

2 Meter Portable

Arrow (shaft) Antenna

This is the one you have heard about. Changes from a walking stick to a 4 element beam in less than 2 minutes.

Strong & Light Weight

Simply the Best

Arrow Antenna

1461 Peacock Pl.

Loveland, CO 80537

Includes Shipping

(303) 663-5485

Fax (303) 663-5065

CIRCLE 80 ON READER SERVICE CARD

Rugged G5RV QuickKits™

created by Antennas West

Box 50063-S, Provo, UT 84605

Fast & Easy to Build

Full-Size visual instructions

No measuring or cutting

Everything included

Finish antenna in minutes

Quality Components

Pre-soldered Silver Fittings

Kinkproof QuietFlex wire

Fully insulated, wax sealed, no-corrode, low noise design

Three All Bands Incl WARC

Double Size G5RV

204 ft. 160-10 Dipole

Full Size G5RV

102 ft. 80-10 Dipole

Half Size G5RV

51 ft. 40-10 Dipole

Quarter Size G5RV

26 ft. 20-10 Dipole

Ready Made 102 ft. G5RV/2

200' Double 200' Line

What Plans, Patterns, Data?

Order Tech Note #124-D \$6.95 ppd USA

Order: Web-Link

444 552.828

1-800-926-7373

CIRCLE 116 ON READER SERVICE CARD

Sell your product in 73 Amateur Radio Today
Call Dan Harper today. . . 1-800-274-7373

MAGGIORE ELECTRONIC LAB.

600 WESTTOWN ROAD, WEST CHESTER PA 19382

Phone (610) 436-6051 Fax (610) 436-6268

Hi Pro Repeaters

Repeaters - VHF - UHF - Transmitters - Receivers - Controllers - Links - Antennas - Duplexers - Remote Base - 2 Year Hi Pro Repeater Warranty

PLEASE CALL OR WRITE FOR OUR COMPLETE FREE CATALOG

Use Your Reader Service Card Today! Our Advertisers Want To Hear From You!

The Worldwide Aeronautical Communications Frequency Directory



This new 200 page book by Robert Evans

has quickly become the

definitive

reference for

aeronautical

DXers

worldwide.

Second Edition

Only ...

\$19.95 (+\$1)

The uncontested best book in the field. An invaluable source book. **Monitoring Times**

Comprehensive and fully informative. Applicable to the novice as well as to the advanced monitor. A book second to none. I could go all night with superlatives. **New Zealand DX Times**

Quite simply the best and most authoritative book on aircraft communications. **Short Wave Mag.**

This has to be the most complete treatise on HF, VHF and UHF voice and digital aircraft communications we have seen. Over 2350 discrete frequencies are given exhaustive attention with in-depth explanations of who, what, where and why various communications take place. A bargain at \$19.95. **Westlink Report**

universal radio inc.

Universal Radio

6830 Americana Pkwy.

Reynoldsburg, OH 43068

Phone: 800 431-3939

FAX: 614 866-2339

EVERY ISSUE OF

73 Amateur Radio Today on Microfiche!

The entire run of 73 from October, 1960 through last year is available.

You can have access to the treasures of 73 without several hundred pounds of bulky back issues. Our 24x fiche have 98 pages each and will fit in a card file on your desk.

We offer a battery operated hand held viewer for \$75, and a desk model for \$260. Libraries have these readers.

The collection of over 600 microfiche, is available as an entire set, (no partial sets) for \$285 plus \$5 shipping (USA). Annual updates available for \$10.

Satisfaction guaranteed or money back!

BUCKMASTER

Route 4, Box 1630

Mineral, Virginia 23117

703:894-5777-800:282-5628

Internet: info@buck.com

Fax 703:894-9141



CIRCLE 168 ON READER SERVICE CARD

Uncle Wayne's Bookshelf

REFERENCE

TAB2701 Transmitter Hunting by Joseph Moell and Thomas Curlee Radio direction finding simplified. \$19.95

UE202 RTTY Today by Dave Ingram Modern guide to amateur radioteletype. \$8.95

TF002 The World Ham Net Directory by Mike Wilkowski New—2nd edition. Introduces the special interest ham radio networks and shows you when and where you can tune them in. \$9.50

WGP87158 1995 North American Callbook The 1994 North American Callbook lists the calls, names, and address information for 500,000+ licensed radio amateurs in all countries of North America. \$29.95

MMH124 Radio Handbook, 23rd Ed. by William I. Orr W5SAI 840 pages of everything you wanted to know about radio communication. \$39.95

WGP1234 1995 International Callbook The new 1994 International Callbook lists 500,000+ licensed radio amateurs in the countries outside North America. It covers South America, Europe, Africa, Asia, and the Pacific area (exclusive of Hawaii and the U.S. possessions). \$35.00

DOV41 Basic Electronics Prepared by the Bureau of Naval Personnel Covers the important aspects of applied electronics and electronics communications. \$16.95

DOV76 Second Level Basic Electronics Prepared by the Bureau of Naval Personnel Sequel to



Basic Electronics, thorough treatment of the more advanced levels of applied electronics. \$9.95

20N096 How To Read Schematics (4th Ed.) by Donald E. Herrington Written for the beginner in electronics, but it also contains information valuable to the hobbyist and engineering technician. \$19.95

WLSWOPC Radio Operator's World Atlas by Walt Stinson, W0PC This is a compact (5x7), detailed, and comprehensive world atlas designed to be a constant desk top companion for radio operators. \$17.95

TAB37109 Secrets of RF Circuit Design by Joseph J. Carr Written in clear non-technical language, covers everything from antennas to transistors. \$21.95

DP918 73 Magazine Index 1960-1990 A complete index to every article published in 73 Magazine through 1990. Book \$15.00 DP919 IBM software (specify type) \$20.00

TAB11065-1 Mastering Radio Frequency Circuits by Joe Carr, 411 p. If you're interested in learning about radio components and circuits, this book is great! Plus there are a ton of simple circuits you can build. It explains how circuits work, about test equipment, receivers, the works. This will take a lot of the mystery out of how radio works...the easy way. This will be one of your better \$20 ham investments. \$20.00

SHORTWAVE

NBPAW94P 1994 Passport to World Band Radio by International Broadcasting Services, Ltd You'll get the latest station and time grids. \$17.95

07R25 The RTTY Listener by Fred Osterman New and expanded. This specialized book compiles issues 1 through 25 of the *RTTY Listener Newsletter*. Contains up-to-date, hard-to-find information on advanced RTTY and FAX monitoring techniques and frequencies. \$19.95

09S42 The Scanner Listener's Handbook by Edward Soomre N2BFF Get the most out of your scanner radio. \$14.95

CRBSM1 Scanner Modification Handbook Vol. 1 by Bill Creek Provides straightforward step-by-step instructions for expanding the operating capabilities of VHF scanners. \$17.95

CRBSM2 Scanner Modification Handbook Vol. 2 by Bill Creek Here it is—a companion to Vol. 1. In fact, Vol. 2 has a section that provides improved approaches and updated techniques for the mods in Vol. 1. There's 18 new exciting modifications for popular scanners. \$17.95

TAB 339643 Tuning In To RF Scanning From Police to Satellite Bands. Bob Kay, 150p 1994, Tab Books. This is a wonderful book for

the VHF-UHF scanner listener. It explains about the various radio bands, antennas, the laws, and lists frequencies for every imaginable service...including the Secret Service, FBI, military, IRS, prisons, Fish & Wildlife, McDonald's order windows, nuclear search teams, railroads, Russian satellites, Treasury Dept., wireless microphones for concerts, and so on. \$14.95.

07A66 Aeronautical Communications Handbook by Robert E. Evans Exhaustive, scholarly treatment of shortwave aeronautical listening. \$19.95

AR4025 Beyond Line of Sight. This book shows why, as we know today, VHF radio waves can travel thousands of miles. Shows how hams discovered or pushed forward the discovery of the propagation modes that make VHF DX possible: tropo, sporadic-E, aurora and auroral-E, meteor scatter, F-Layer propagation, transequatorial propagation and earth-moon-earth. \$12.00

TAB 447748 The Shortwave Listener's Q&A Book—Everything you need to know to enjoy Shortwave Listening. Anita McCormick, 142p 1994, Tab Books. Choosing receivers, accessories, antennas, frequencies, and getting QSLs. SWL is an exciting hobby...that's what got me interested in hamming...Wayne. \$12.95

NEW ITEMS

WSGWHO Ham Operator Education Package Software, Novice—Extra for PC's, contains both 3 1/2" and 5 1/4" disks. \$39.95

WSGWSW No-Code Ham Radio Software Package for PC's, contains both 3 1/2" and 5 1/4" disks. \$29.95

WSGWHV No-Code Video, Manual, Part 97 Rules Learn how to be a ham radio operator. \$29.95

AR4092 Your RTTY/AMTOR Companion invites you to explore the world of HF digital communications. If you've never operated RTTY or AMTOR before, this book is written especially

for you! You won't find complicated technical jargon here. Just information you can use right away. You'll discover how to... Assemble your own RTTY/AMTOR station... Use RTTY and AMTOR to talk to amateurs throughout the world... Compete in RTTY/AMTOR contests... Hunt for digital DX. \$8.00

AR3754 Radio Frequency Interference—How to find it and fix it. Interference problems are challenging, but curable. With the techniques in this book, you can help restore electronic peace in your neighborhood. \$15.00

AR4661 Antennas and Techniques for Low-Band DXing can be your ticket to low-band suc-

WAYNE'S PICKS

WG2 The Million Dollar Video Uncle Wayne has made a video which explains how just about any company can increase sales by over a million dollars just through the sneaky (aka intelligent) use of promotion. As a magazine editor and publisher he explains in detail how you can manipulate these people to give you tons of free advertising. Video of Uncle Wayne showing you how to beat the system. Order \$1 million Video. \$39.95

"SEEK YOU" by The Ham Band—The titles include "Always on the air", "On the Monday Evening Grayline", "Radio Widow", "The Trip to Dayton", "The Contest" and seven more. The

ham radio CD started as a bit of a joke by Andrew and Lissa Huddleston who quickly discovered that there are many experiences that radio hams go through which are interesting enough to sing about. This is an extremely entertaining CD and will strike a chord with any radio ham, SWL or XYL—an ideal present! SYCD \$15 SYTAPE \$10.

IB8657 Dumbing Us Down: The Hidden Curriculum Of Compulsory Schooling. by John Gatto If you enjoyed "Declare War", you'll enjoy this also. A Wayne Green recommended reading. \$9.95.

SOFTWARE

GGTE Morse Tutor From beginner to Extra class in easy self-paced lessons. Code speeds from 1 to over 100 words per minute. Standard or Farnsworth mode. Adjustable tone frequency. Create your own drills, practice or actual exams. Exams conform to FCC requirements. 5 1/4" floppy for IBM PC, XT, AT, PS/2 or compatibles. \$19.50

GG3J2 Morse Tutor 3.5" Disk \$19.50
GGADV5 Advanced Edition 5.25" Disk \$29.95
GGADV3 Advanced Edition 3.5" Disk \$29.95

LANZA Code Programs—(Available on 5 1/4" disk) Inexpensive complete study guide code programs for both the C64/128 Commodores and the IBM compatibles. Programs include updated FCC questions, multiple choice answers, formulas, schematic symbols, diagrams, and simulated (VE) sample test.

	IBM Part#	Commodore Part#	Price
Novice	LZIBM01	LZCOM01	\$14.95
Tech	LZIBM02	LZCOM02	\$14.95
General	LZIBM03	LZCOM03	\$14.95
Advance	LZIBM04	LZCOM04	\$19.95
Extra (New Pool)	LZIBM05	LZCOM05	\$19.95

* Add \$2.00 for 3 1/2" Disk

VIS Study Cards Compact, up-to-date Flash Cards with Key Words, Underlined, Quiz on back. Formulas worked out. Schematics at your fingertips. Used SUCCESSFULLY by ages 6 to 8!!

NOVICE	VIS01	\$11.95
TECH	VIS02	10.95
GENERAL	VIS03	9.95
ADVANCED	VIS04	15.95
EXTRA	VIS05	14.45

cess. Drawing on the experiences of successful DXers and the author's own considerable experience, John Devoldere, ON4UN, shares the tips and techniques that can make the difference between a station that takes part in a contest and one that wins it! \$20.00

AR3819 Physical Design of Yagi Antennas by David B. Leeson W6QHS provides the tools here to design and build robust Yagi antennas, using sound mechanical engineering principles. You need no longer fear the consequences of wind or ice storms on your antennas. With this information, you can build or "beef up" existing Yagis. \$20.00

RS-1 The Amateur Radio Mail Order Catalog and Resource Directory, 4th Edition is the most comprehensive source book for electronic parts, software, and equipment targeted at the radio amateur or serious electronic hobbyist anywhere! Plus a wealth of "value-added" reference material all in 262 pages. 4th Edition clearance at only \$8.95. (was \$16.00)

TAB4354 The Beginner's Handbook of Amateur Radio, Third Edition by Clay Laster W5ZPV, 395 pages. This is a wonderful book for newcomers. It is basic and well illustrated. Even if you have all the other ham handbooks, you'll still find this one useful. \$22.00

ARRL BOOKS

AR1995 ARRL 1995 Handbook (71st Ed.) Features: added DSP, improved treatment of Pi and Pi-L, all new all-digital logic, plus lots more. \$30.00

AR1086-4 ARRL Operating Manual (4th Ed.) Information on how to make the best use of your station, including: interfacing home computers, OSCAR, VHF-UHF. \$18.00

AR3657 QRP Notebook by Dave DeMaw W1FB Presents construction projects for the QRP operator. \$10.00

AR3207 W1FB's Design Notebook by Dave DeMaw W1FB Filled with simple practical projects that can be built using readily available components and common hand tools. \$10.00

AR0402 Solid State Design Good, basic information, circuit designs and applications; descriptions of receivers, transmitters, power supplies, and test equipment. \$12.00

AR4173 Now You're Talking! All You Need To Get Your First Ham Radio License (2nd Edition) A complete study guide for the Technician and Novice written exam. Practical information every beginner needs is written clearly and simply and in small doses. \$19.00

AR4718 ARRL Repeater Directory 1993-1994 19,000+ listings with digipeaters, bandplans, CTCSS (PL/TM) tone chart, frequency coordinators, ARRL special service clubs, and beacon listings from 14 MHz to 24 GHz. \$6.00

AR3398 The DXCC Companion by Jim Kearman KR1S Spells out in simple, straightforward terms what you need to be a successful DX'er. \$8.00

AR1250 Log Book—Spiral \$3.50

AR3177 The ARRL Spread Spectrum Source Book. From a conceptually simple beginning, a group of experimenters set out to develop first theoretical and later practical systems for spread spectrum communica-

tions. This book consists of articles, papers and government reports that document the process whereby amateur spread spectrum progressed from the drawing board to the airwaves. \$20.00

AR2960 Transmission Line Transformers (2nd Ed.) by Dr. Jerry Sevick W2FMI Practical designs and specific information on construction techniques and sources of material. \$20.00

AR3851 Hints and Kinks Ideas for setting up your gear for comfortable, efficient operation. \$10.00

ARRL License Manuals Complete FCC question pools with answers.
AR4181 Technician Class \$ 6.00
AR4688 General Class \$12.00
AR3274 Advanced Class \$ 8.00
AR3282 Extra Class \$ 8.00

AR3185 The Satellite Experimenter's Handbook, (2nd Ed.) by Martin Davidoff K2UBC Expanded and revised. Focusing on satellites built by and for the international radio amateur community. \$20.00

AR2030 Your Gateway to Packet Radio (2nd Ed.) Tells everything you need to know about this popular new mode. \$12.00

AR4645 Satellite Anthology The latest information on OSCARs 9 through 13 as well as the RS satellites, the use of digital modes, tracking antennas, RUDAK, microcomputer, and more! \$10.00

AR4483 Weather Satellite Handbook (4th Ed.) by Dr. Ralph Taggart W8SDQJ Expanded and revised to reflect today's weather-fax satellite technology. \$20.00

AR4653 Companion Software for Weather Satellite Handbook 5 1/4" MS-DOS Floppy. \$10.00

AR2083 Complete DX'er (2nd Ed.) by Bob Locker W9KJ Learn how to hunt DX and obtain hard-to-get QSL cards. \$12.00

AR3762 Your QRP Operating Companion No spe-

cial rigs or expensive equipment to enjoy the excitement and challenge of low-power operating. \$6.00

AR3169 QRP Classics Compilation of ARRL publications on building receivers, transmitters, transceivers, accessories. \$12.00

AR4270 FCC Rule Book A must for every active radio amateur. \$9.00

AR0356 Morse Code: The Essential Language by L. Peter Carron, Jr. W3DKV Expanded and revised in its 2nd edition. How to handle distress calls heard not only on the hambands but on

maritime and aircraft frequencies. \$6.00

AR4114 Low Profile Amateur Radio For the Ham who lives where antennas are frowned upon. From hiding your antenna to operating with low power. This book tells you how to get on the air using these techniques—and others—without calling attention to yourself. \$8.00

AR3983 Understanding Basic Electronics An ARRL book. 314 big pages. This explains everything very simply: the math, DC, AC, transistors, even tubes (wow!). Dirt cheap at \$17. Isn't it about time you understood the fundamentals? \$17.00

CODE TAPES

73T05 "Genesis" \$5.95

5 wpm—This beginning tape, takes you through the 26 letters, 10 numbers, and necessary punctuation, complete with practice every step of the way.

73T06 "The Sticker" \$5.95

6+ wpm—This is the practice tape for those who survived the 5 wpm tape, and it's also the tape for the Novice and Technician licenses. It is comprised of one solid hour of code. Characters are set at 13 wpm and spaced at 5 wpm.

73T13 "Back Breaker" \$5.95

13+ wpm—Code groups again, at a brisk 13+ wpm so you'll be really at ease when you sit down

in front of a steely-eyed volunteer examiner who starts sending you plain language code at only 13 per.

73T20 "Courageous" \$5.95

20+ wpm Congratulations! Okay, the challenge of code is what's gotten you this far, so don't quit now. Go for the extra class license. We send the code faster than 20 per.

73T25 "The Mind Boggler" \$5.95

25+ wpm Fiendishly generated by kindly old Uncle Wayne for hams with a strong need for self punishment. Once you've conquered 25 per let Unik know if you need a 50 wpm tape.

WAYNE WRITES

WG1 We The People Declare War On Our Lousy Government—360p soft cover. This is Wayne's report to the New Hampshire Economic Development Commission explaining what the major problems are facing both New Hampshire and the country, and proposing simple, inexpensive solutions. Wayne proposes a simple way to have government departments happily cut their expenses by 50% within three years; how to cut the cost of incarcerating prisoners by over 90%; how to end welfare; how to reduce the deficit; how to cut medical costs and improve health care; how to cut school costs and improve schools. An absolute steal at \$13.

WG4 20/20 Foresight—Twenty 16p updates on the Declare War book—320p. Further proposals for solving critical American problems, such as a new approach to financing small businesses, how to finance Russia and other countries and make a profit doing it, the real dope on bioelectromagnetics, a new kind of polytechnical university, a new electronics technology, why Africa is in such a mess, why Perot bombed, how to have tuition-free universities, a plan for making Congress turn honest, etc. Plenty more. One of the best \$10 you'll ever spend. Ridiculously priced at \$10.

WG5 Submarine Life in WWII—60p. Wayne's story of his adventures on the USS Drum SS-228 on five war patrols in the Pacific in 1943-45. What's it really like on a submarine when you're being depth charged? And what's the day-to-day life on a submarine like? Did you see the movie Das Boot? This is a collection of stories originally published in the *Drum Newsletter*. Exciting stuff and only \$7.50.

WG6 Uncle Wayne's Caribbean Adventures—96p. Wayne's adventures scuba diving all around the Caribbean, visiting ham operators, and sight-seeing. If you're interested in how to travel economically, you'll get some great ideas from this. Wayne and his wife Sherry sure know how to travel economically. He starts out with his "Diving, the Wimp Sport." You'll love their visit to 11 islands in 21 days trip. A measly \$7.50.

WG7 Uncle Wayne's Travels—52p. Wayne travels to Russia, London, Aspen, St. Pierre, Munich, Vienna, Krakow, and Prague without it costing nearly as much as you might think. Cheap for you too, at \$5.00.

ANTENNAS

UE220 The Easy Wire Antenna Handbook by Dave Ingram K4TWJ. Gives you all of the needed dimensions for a full range of easy to build and erect "sky wires." \$9.95

WGP87034 All About Cubical Quad Antennas by William Orr and Stuart Cowan "The Classic" on Quad design, theory, construction, operation. New feed and matching systems. New data. \$11.95

TAB 3270P Practical Antenna Handbook—Second Edition, 1994. Joseph Carr, Tab Books. This 560-page book is a real treasure. As starts with the fundamentals of antenna and feedline theory, explains about propagation of all kinds, and then provides a ton of easy antenna construction projects. It covers antennas and feeders for all bands. You'll have a ball with this book. By the way, the explanations are simple and well illustrated, with some math where it's unavoidable, but it won't bog you down. It even has the ZL-Special antenna, which I've used on 20m with some spectacular DXing success. It has an extraordinarily low angle of radiation and made it so I could always work the rare staff first... Wayne. \$26.95.

AR4734 ARRL Antenna Book The new 16th Edition represents the best and most highly regarded information on antenna fundamentals, transmission lines, design, and construction of wire antennas. \$30.00

AR0194 Antenna Compendium Vol. 1 Materials on verticals, quads, loops, yagis, reduced size antennas, baluns, Smith Charts, antenna polarization. \$10.00

AR2545 Antenna Compendium Vol. 2 Covers verticals, yagis, quads, multiband and broadband systems, antenna selection. \$12.00

AR2626 Companion Software for Antenna Compendium Vol. 2 5 1/4" MS-DOS floppy. \$10.00

AR4017 Antenna Compendium Vol. 3 More verticals, yagis, quads, plus loops, arrays, mobile, direction finding, controlled currents, computerized, installation, overloads, plus 40 new articles for beginner's to advanced. \$14.00

AR2618 W1FB's Antenna Notebook by Dave DeMaw W1FB Get the best performance out of unobtrusive wire antennas and verticals. Build tuners and SWR bridges. \$10.00

WGP87107 All About Vertical Antennas by William Orr Comprehensive coverage of amateur communications. \$11.95

WGP87042 Beam Antenna Handbook by William Orr and Stuart Cowan Everything you need to know about beam design, construction, and operation. \$11.95

WGP87077 Simple, Low-Cost Wire Antennas For All New! Low-cost, multi-band antennas; inexpensive beams; "Invisible" antennas for hams in "tough" locations! New data. \$11.95

AR2200 Antenna Impedance Matching by Wilfred N. Caron Most comprehensive book written on using Smith Charts in solving impedance matching problems. \$20.00

AR0410 Yagi Antenna Design A Ham Radio series polished and expanded by Dr. Lawson. \$15.00

AR2995 Reflections will help dispel the half-truths and outright myths that many believe are true about transmission lines, standing waves, antenna matching reflected power and antenna tuners. \$20.00

AR3118 Reflections—Software for IBM 5-1/4" \$10.00

as 23, 33, and 70cm. \$6.95

AR3959 Your Packet Companion Perfect for the packet newcomer. \$8.00

AR3878 Your VHF Companion Explore the fascinating activities on the VHF bands, FM and repeaters, packet, CW & SSB, Satellites, ATV, transmitter hunting and more. \$8.00

03R02 RTTY Today by Dave Ingram K4TWJ Most comprehensive RTTY guide ever published. \$8.50

alive and fun. Here's a whole book packed with crystal set circuits that anyone can build. You may get interested enough to join the Crystal Set Society and get their newsletter. Now start saving those oatmeal boxes, okay? 133 pages \$10.95

AR4432 W1FB's Help for New Hams by Doug DeMaw W1FB Complete for the newcomer. Put together a station and get on the air. \$10.00

UHF/VHF/PACKET

TAB3222 The Packet Radio Handbook (2nd Ed.) by Jonathan L. Mayo KR3T "...the definitive guide to amateur packet operation."—Gwyn Reedy W1BEL Only \$16.95

ARTSCI U.S. Repeater Mapbook by Robert Martin The Guide for traveling radio amateurs. \$9.95

TP001 The Basic Guide to VHF/UHF Ham Radio by Edward M. Noll Provides a first rate introduction to the 2.6 and 1.25 meter bands as well

BOOKS FOR BEGINNERS

W5GWN Technician Class License Manual: New No-Code by Gordon West This book covers everything you need to become a Technician Class Ham. Every question and answer on the examinations is found in this one book. FCC Form 610 application. \$9.95

XTAL-1 The Crystal Set Handbook by Phil Anderson W0XJL Want to give a kid an exciting present? Or maybe yourself? Crystal sets are

Uncle Wayne's Bookshelf Order Form

You may order by mail, telephone, or fax. All payments are to be in US funds. Allow 4 weeks for delivery.

Item	Title	Qty.	Price	Total

Shipping: All US orders add \$5.00 shipping—

shipped UPS. (Please provide street address.)

Make checks payable to "Uncle Wayne's Bookshelf."

SHIPPING

TOTAL

Foreign Orders: Choose one: ☐ surface shipping ☐ air shipping.

(Surface delivery may take 2 to 3 months.)

Note: The actual foreign shipping costs will be additional to regular shipping and handling fees.

OYES! Send me 12 issues of 73 at the low rate of \$19.97. (Save 43% of cover price.)

Canada add \$7 plus \$1.40 GST. Foreign add \$9 surface; \$42.00 airmail.

OYES! Send me 12 issues of Radio Fun at the low rate of \$12.97. (Save 20% of cover price.)

Canada add \$7 plus \$7.00 GST. Foreign add \$12 surface; \$36.00 airmail.

Name _____

Street _____

City _____ State _____ Zip _____

TOTAL \$ _____ ☐ Check/Money Order

☐ AE ☐ MC ☐ VISA \$10 minimum for credit card orders

Card # _____ Expiration Date _____

Signature _____ Phone # _____

Telephone: (603) 924-4117 (800) 234-8458 FAX: (603) 924-8613 UWF 03/95

Mail: Uncle Wayne's Bookshelf, 70 Route 202N, Peterborough, NH 03458

Radio City, Right on Target

800-426-2891

800-426-2891

FT-2200

SAVE
\$20
More

SAVE
\$30
More

FT-5100

FT-2500M

SAVE
\$20
More

\$379⁹⁵

IC-736

Icom Coupons
Expire 4-30-95

IC-2700H

\$619⁹⁵

FT-5200

SAVE
\$30
More

FL-7000

\$359⁹⁵

IC-A100H

H.F. + 6 Meter Band

\$1979⁹⁵

Dual Band Mobile

\$769⁹⁵

IC-738

\$649⁹⁵

New H.F. Base

\$1549⁹⁵

IC-T21A

2 Meter H.T.

\$369⁹⁵

TH-22AT

20 CASH
BACK
REBATE

DJ-582T

Dual Band

\$389⁹⁵

SAVE
\$10
More

DR-600T

Dual Band

\$589⁹⁵

'LOW'

TH-79A(D)

\$489⁹⁵

IC-820H

Dual Band Satellite

\$1629⁹⁵

IC-2GXAT

2 Meter H.T.

\$289⁹⁵

SAVE
\$10
More

Alenco
Coupons
Expire
3-31-95

SAVE
\$15
More

DR-130

2 Meter

\$314⁹⁵

DJ-G1T

2 Meter H.T.

\$289⁹⁵

IC-W21AT

Dual Band H.T.

\$429⁹⁵

FREE
HM 46
SPKR MIC

WOW

IC-281

2 Meter Mobile

\$389⁹⁵

SAVE
\$25
More

TS-50S

60 CASH
BACK
REBATE

\$1099⁹⁵

ALINCO
ELECTRONICS INC.

Kenwood Rebates
Expire 3-20-95

KENWOOD

TM-733A

40 CASH
BACK
REBATE

\$649⁹⁵

IC-2340H

Dual Band Mobile

\$599⁹⁵

NEW

FT-530

\$449⁹⁵

IC-2000H

SAVE
\$20
More

2 Meter
Mobile

\$349⁹⁵

NEW

ICOM

IC-21A/E

Dual Band H.T.

\$499⁹⁵

FT-51R/31

\$489⁹⁵

SAVE
\$20
More

FT-11R

\$299⁹⁵

FT-1000D

\$4109⁹⁵

FT-840

SAVE
\$25
More

FT-900/AT

WOW

\$1344⁸⁸

YAESU



2663 County Road 1, Mounds View, MN 55112
Metro: (612)786-4475 • Nat'l Watts: 1-800-426-2891 • FAX: (612)786-6153

Store Hours: M-F, 10:00 am-8:00 pm, Sat: 10:00 am-5:00 pm
Phone Hours: M-F, 9:00 am-8:00 pm, Sat: 10:00 am-5:00 pm

Price Subject To Change Without Notice Not Responsible For Typographical Errors

\$595*
For 2 Day Delivery

*Up to 12 lbs. In Continental U.S.



CIRCLE 153 ON READER SERVICE CARD

"Built-in duplexer and 94 memories!"

"Great price and smallest dual band made, too!"

"Comes with a backlit DTMF Mic!"

"Yaesu did it again!"

FT-5100

Dual Band Mobile

Frequency Coverage:

- 2M: 130-174 MHz RX
144-148 MHz TX
- 70 cm: 430-450 MHz RX/TX
- 94 Memories (47 per band)
Odd Splits In Any Memory
- Dual in-band receive
(V/V, U/U or V/U Receive Operation)
- DTMF Paging and Coded Squelch Included.
- Packet Radio TNC Jack
Built-In To Back of Radio
- CTCSS Encode Built-In
- Dual Receive with Balance Control
- Full Duplex Cross Band Operation
- Built-In Antenna Duplexer
- Back Lit DTMF Microphone
- Automatic 8 Level Display Dimmer
- Built-In Cross Band Repeat
- RF Output Power:
2M: 50/5 watt (high/low)
70 cm: 35/5 watt (high/low)

Accessories:

- FTS-22 CTCSS Dual Decoder
- SP-7 External Speaker
- MW-2 Wireless Microphone/Controller

The ultimate definition of Dual Band.



No other frequency, or band, can receive at the same time with In-Band Dual Receive*. Although equipped with traditional dual band, Yaesu has taken receive two steps beyond in the remarkable FT-5100. Combined in one compact mobile transceiver, it's the ultimate meaning of "dual band".

With 94 memory channels – more than any other radio in its class – and the optional MW-2 Wireless Mic, the flexibility of the FT-5100 is matchless. But to make sure the FT-5100 is complete, and an even better value, unlike the competition, there's a backlit DTMF mic included.

Through advanced miniaturization technology you'll find practical additions like the built-in antenna duplexer – an option on similar transceivers – and equally important, DTMF paging and coded squelch. All in the smallest dual band made!

Priced for the shrewd buyer, you've got to hear it to believe it. Dual band re-defined. Combinations like this can't

Three Dual Receive Configurations

18 146.760 19 448.525

VHF/UHF

19 448.525 10 447.550

UHF/UHF

18 146.760 15 146.520

VHF/VHF

Dual band redefined.
And the choice is yours.

In-Band Dual Receive available only on FT-5100


Here's another Yaesu exclusive!
The MW-2 Wireless Mic
with Remote Control.



be found anyplace else, so contact your nearest Yaesu dealer and tell him you want the "ultimate dual band". The FT-5100.

FT-5200 Dual Band Mobile.

Offers the security of a quick release front control panel (not available on the FT-5100), 32 memories, DTMF paging (w/optional FRC-4), Back-lit mic, built-in antenna duplexer and more.



YAESU

Performance without compromise.SM

*In-Band Dual Receive available only on FT-5100.

© 1992 Yaesu USA, 17210 Edwards Road, Cerritos, CA 90701 (310) 404-2700

Specifications subject to change without notice. Specifications guaranteed only within amateur bands. Some accessories and/or options are standard in certain areas. Check with your local Yaesu dealer for specific details.

MIL-SPECS/TOP SPECS!

WINTER CASH BACK OFFER!

On Selected Radios

See Kenwood
Dealer For Details



TM-241A FM MOBILE TRANSCEIVER

Pure and simple, the concept reads like this: "rock-solid performance with straightforward operation, at an affordable cost". And Kenwood's TM-241A (144MHz) FM mobile transceiver symbolizes this perfectly.

Great looks and rugged construction are just the beginning. The TM-241A's user-friendly controls make mobile QSOs a snap, and a powerful 50-watt amplifier lets you work simplex with confidence or hit those distant repeaters. Reception specs are equally impressive: intermod characteristics have been improved* to reduce interference from strong adjacent band signals. Plus, there are 20 multi-function memory channels for programming combinations of frequency, sub-audible tone, and repeater offset.

So, if you're looking for true mobile performance, go back to the basics and reach for Kenwood's TM-241A.

Features

- 144-148 MHz TX, 118-174 MHz RX
- 50 watts RF output
- 20 multi-function memory channels
- Large LCD display with illuminated keys
- Full band scan, programmable band scan, memory scan with channel lock-out
- Time-operated & carrier-operated scan modes
- Built-in selectable CTCSS tone encoder
- Auto repeater offset
- Tone alert with elapsed time indicator
- DTSS for selective calling and paging (with optional DTU-2)
- Time-out timer
- Auto power-off with warning beeper
- Meets U.S. military standards for shock and vibration (MIL-STD 810C/D/E)*
- Modifiable for MARS/CAP use (permits required)

*These specifications guaranteed for Amateur Band only.
Current K&K7 version with serial number 5380000 or later.

KENWOOD COMMUNICATIONS CORPORATION

AMATEUR RADIO PRODUCTS GROUP
P.O. BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745

*Customer Support Brochures (310) 639-5300

*Dealer Locations: Parts (800) KENWOOD • Business Group Service (BBS) (310) 761-8184

KENWOOD ELECTRONICS CANADA INC.

9070 Redfern Road, Mississauga, Ontario, Canada M5T 1S8

KENWOOD

